

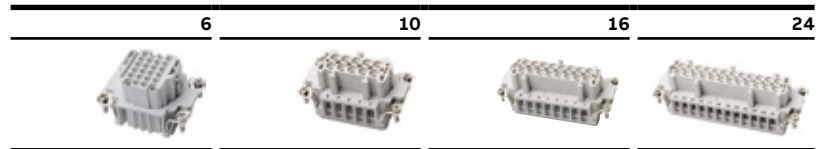
Wire pin & sleeve connectors

T Series 16 A, 600 V AC – 6, 10, 16 & 24 contacts + ground



- High-temp 200 °C rated inserts
- Silicone Viton® seals for molded-edge gaskets*
- Corrosion-resistant copper-free aluminum housings with special finish
- UL94V-O ergonomic thermoplastic handles
- Electrostatic epoxy powder-coated finish

*Viton is a trademark of DuPont Performance Elastomers.

Install to matching series hood/base













Screw terminal inserts

	Screw terminal inserts* (mm ²)	6 + G	10 + G	16 + G	24 + G
	Male – Pins 20–14 AWG (0.5–2.5)	MS206T	MS210T	MS216T	MS224T
	Female – Sleeve 20–14 AWG (0.5–2.5)	FS106T	FS110T	FS116T	FS124T

* Inserts may be dark brown or gray in color.

T Series 16 A, 600 V AC

Bases – standard mount				Number of contacts + ground connection				
				6	10	16	24	
Single lever	Double lever	Housing	NPT entry (in.)	Lever locking type				
				Single	Double	Double	Double	
		Panel base	–	PB306T	PB110T	PB116T	PB124T	BASES
		Box base (no cover)	1 x ½	BB406TMV	BB010TMV	–	–	
			1 x ¾	–	–	BB016TMV	BB024TMV	
			2 x ½	BB506TMV	BB110TMV	–	–	
			2 x ¾	–	–	BB116TMV	BB124TMV	
Hoods – standard mount								
		Side entry	1 x ½	SH606T	SH010TMV	–	–	HOODS
			1 x ¾	–	–	SH016TMV	SH024TMV	
			1 x 1	–	–	–	SH124TMV	
		Top entry	1 x ½	TH806T	TH210T	–	–	
			1 x ¾	–	–	TH216T	TH224T	
			1 x 1	–	–	–	TH324TMV	
Coupler hoods – inline for inline, portable or special service connections. Coupler hoods mate to standard hoods only.								
		Top entry	1 x ½	CH806T	CH610T	–	–	COUPLER
			1 x ¾	–	–	CH616TMV	CH624T	
			1 x 1	–	–	CH716T	CH724T	

Note: Hoods and Bases are black colored to denote special T series.