


Catalog Number Logic

How our product catalog numbers are derived

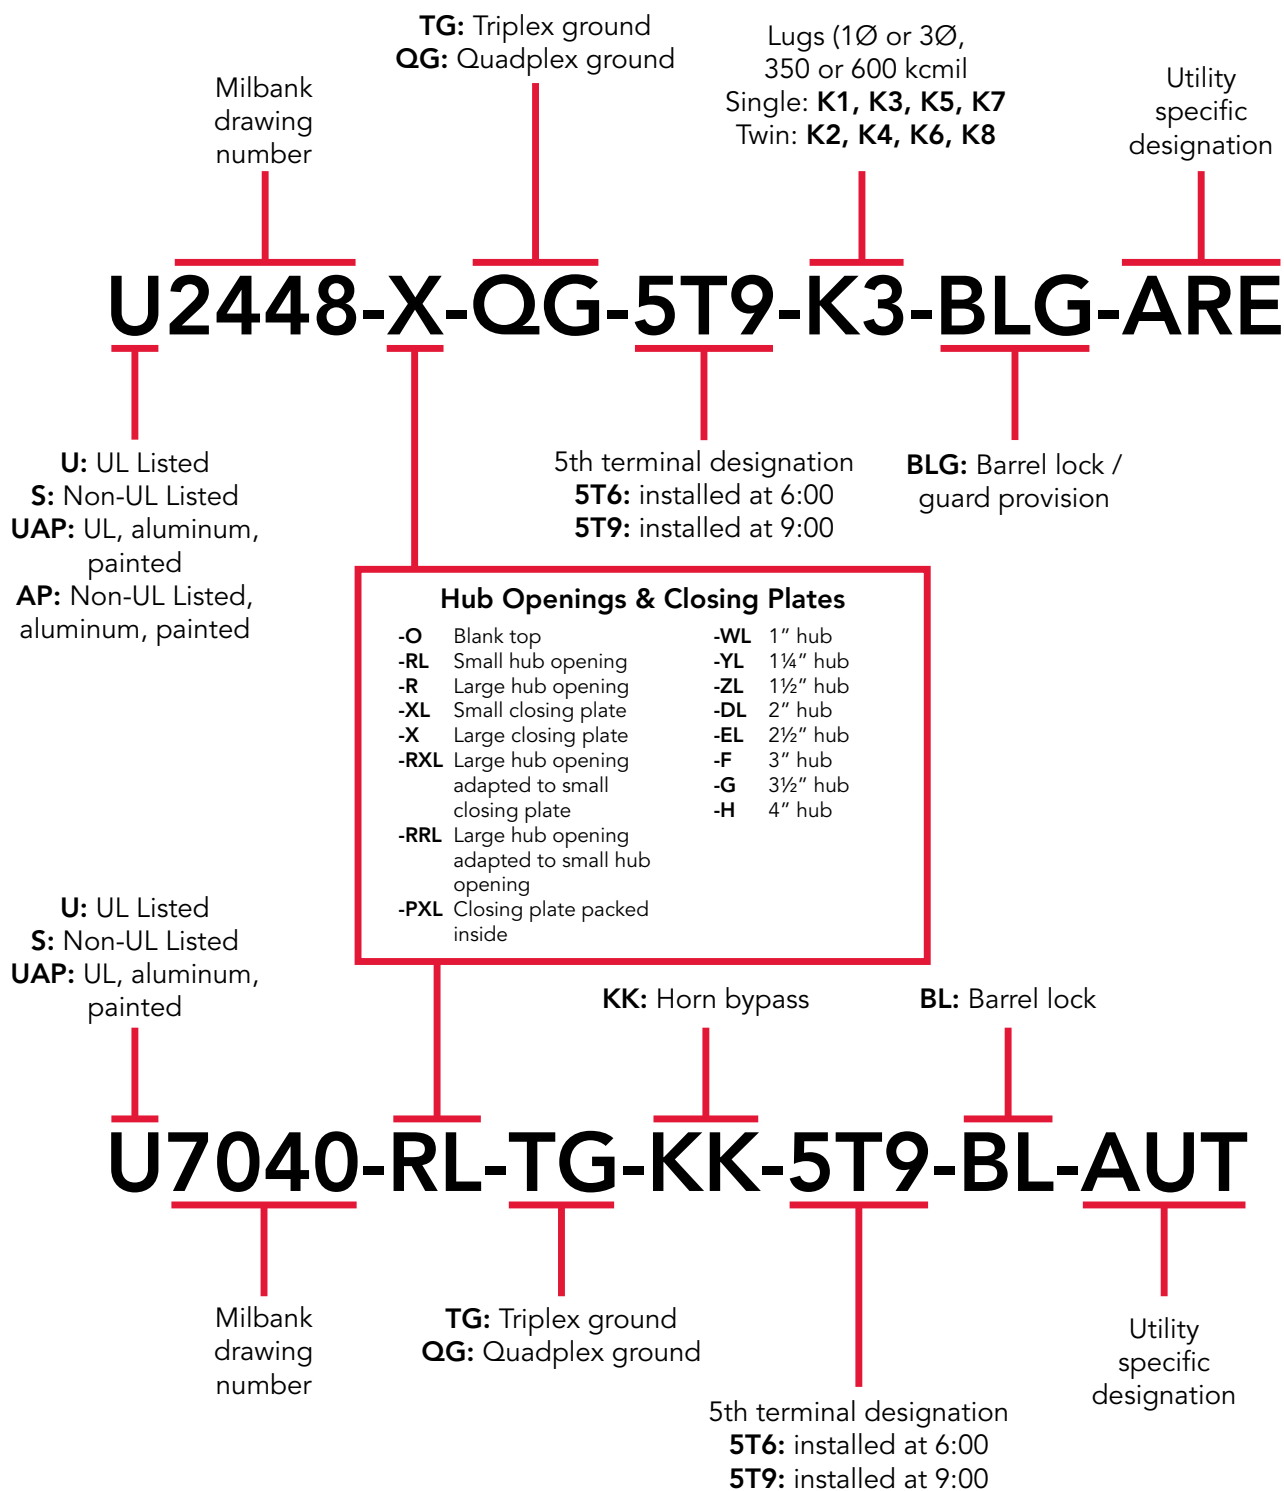

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.


Meter Mains

100 & 200 Amp | 4 Terminal | Ringless | 240 VAC

1 1
METER MAINS



U7375-RL-KK-CECHA

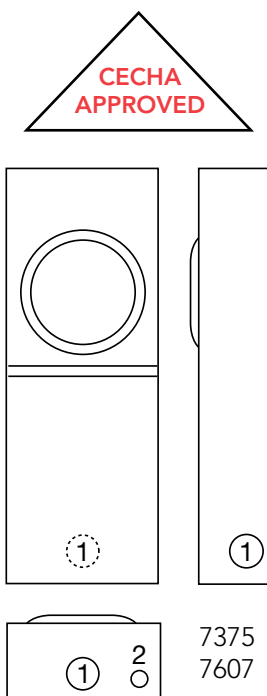

7375
7607



U7607-RL-200-KK-CECHA
supplied with 200 amp circuit breaker

100 Amp | 4 Terminal | Meter Mains (Plug-In) | Ringless | 1Ø

Catalog Number	Service	Hub	Connectors CU/AL		Bypass	Dimensions			Knockouts	
			Line	Load		D"	W"	H"	1	2
U7375-RL-KK-CECHA	OH	H.O.	#6-2/0	C.B.	Horn	3 $\frac{3}{4}$	8 $\frac{5}{8}$	22	1 $\frac{1}{4}$	$\frac{1}{4}$, $\frac{1}{2}$

Notes

- **Circuit Breaker:** Main circuit breaker not supplied with unit. For 100 amp service, order catalog number **Q2100** separately. See circuit breaker chart on accessory page for other compatible models.
- **Fifth Terminal:** For field-installed fifth terminal, order catalog number **5T8K2**.
- **Hubs:** Order hubs separately — see accessory page for ordering information.

200 Amp | 4 Terminal | Meter Mains | Ringless | 1Ø

Catalog Number	Service	Hub	Connectors CU/AL		Bypass	Dimensions			Knockouts	
			Line	Load		D"	W"	H"	1	2
U7607-RL-200-KK-CECHA	OH	H.O.	#6-350	#1-300	Horn	4 $\frac{1}{2}$	8 $\frac{5}{8}$	29	2	$\frac{1}{4}$, $\frac{1}{2}$

Notes

- **Circuit Breaker:** 200 amp main circuit breaker factory bussed. Order catalog number **UQFB-200-X1** for replacement. Other amperages available — see circuit breaker chart on accessory page.
- **Fifth Terminal:** For field-installed fifth terminal, order catalog number **K5T**.
- **Hubs:** Order hubs separately — see accessory page for ordering information.

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.

