


# Catalog Number Logic


How our product catalog numbers are derived

**5**  
CATALOG  
NUMBER  
LOGIC

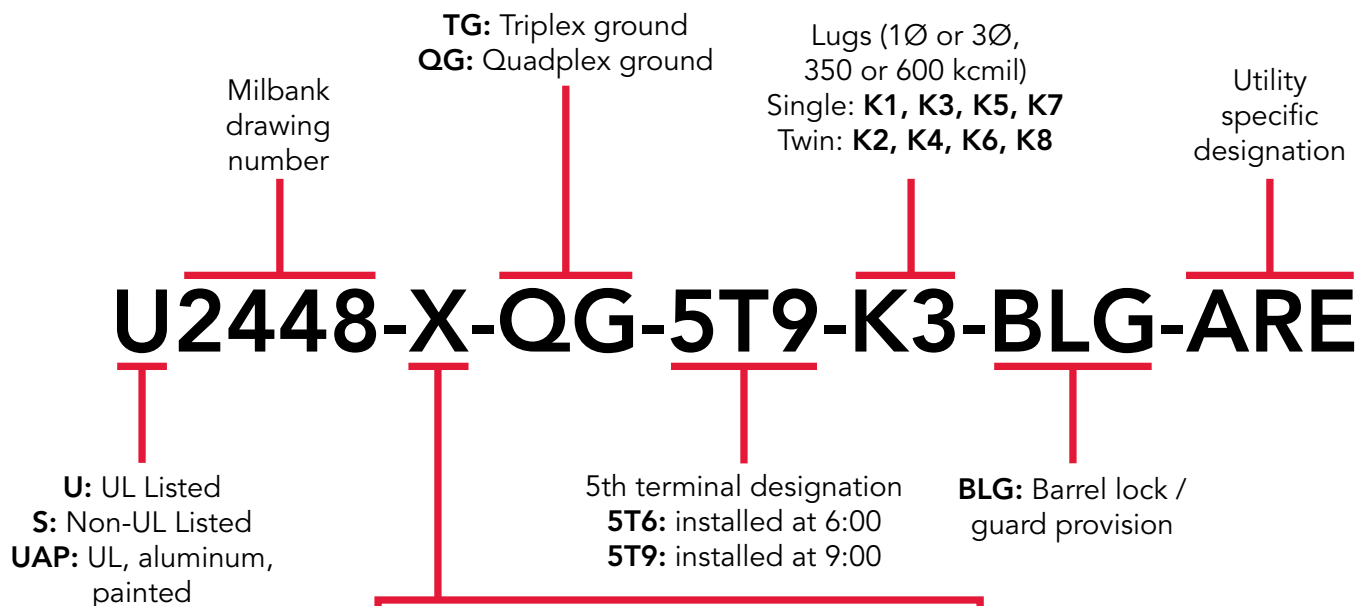

## Hub Openings & Closing Plates

<b>-O</b> Blank top	<b>-PXL</b> Closing plate packed inside
<b>-RL</b> Small hub opening	<b>-WL</b> 1" hub
<b>-R</b> Large hub opening	<b>-YL</b> 1¼" hub
<b>-XL</b> Small closing plate	<b>-ZL</b> 1½" hub
<b>-XT</b> (2) Large Closing plates	<b>-DL</b> 2" hub
<b>-XTL</b> (2) Small closing plates	<b>-EL</b> 2½" hub
<b>-X</b> Large closing plate	<b>-F</b> 3" hub
<b>-RXL</b> Large hub opening adapted to small closing plate	<b>-G</b> 3½" hub
<b>-RRL</b> Large hub opening adapted to small hub opening	<b>-H</b> 4" hub

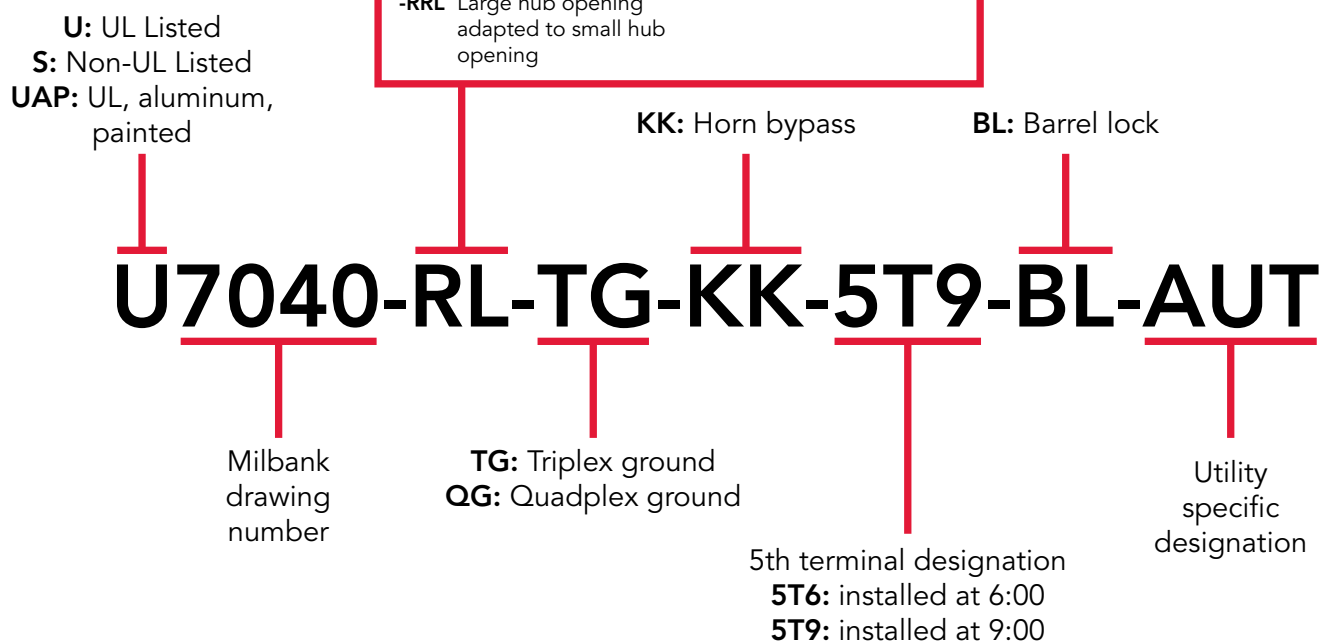

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.




# Multi-Position Sockets

150 Amps | 4 Terminal | Ringless | 300 VAC


**21**  
150 AMPS  
MULTI-POSITION  
SOCKETS




U1232-RRL-KK-K1

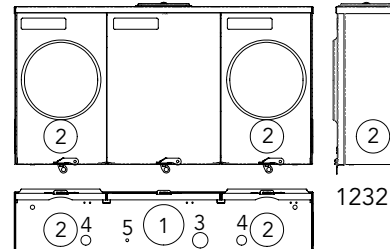

1232

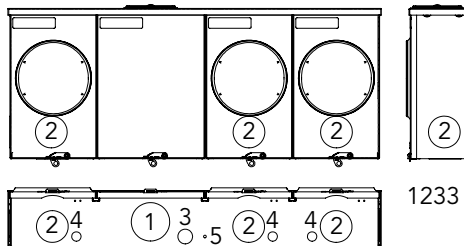

1233

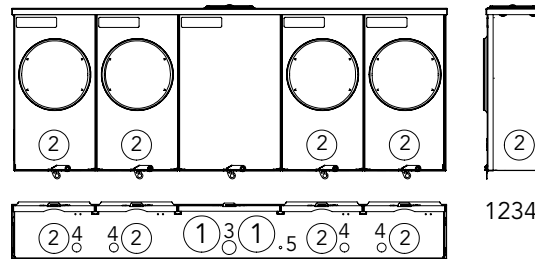

1234

150 Amps per Position | 4 Terminal | Multi-Position | Ringless | Horn Bypass

Catalog Number	Positions	Service	Hub	Connectors CU/AL		Dimensions			Knockouts				
				Line	Load	D"	W"	H"	1	2	3	4	5
U1232-RRL-KK-K1	2	OH/UG	H.O.	#6-350	#6-350	5⅞	26½	14	3	2½	1	½	¼
U1233-RRL-KK-K1	3	OH/UG	H.O.	#6-350	#6-350	5⅞	34¾	14	3	2½	1	½	¼
U1234-RXL-KK-K1	4	OH/UG	C.P.	#6-350	#6-350	5⅞	42⅞	16	3	2½	1	½	¼

## Notes

- **Hubs:** For proper hub selection, refer to the hub suffix chart on the accessories page. For the **U1254-6** two hub openings are supplied and the extra opening is closed with a closing plate as standard.
- **Fifth terminal:** For field mounted fifth terminal, order catalog number **K5T** (9 o'clock position).

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.

