
## 6" LED Downlight Trims

The trims shown here may be used with any 6" IC-Rated 600 & 900 Lumen LED WarmDim<sup>®</sup> housings shown on page 56.



## 6" LED Downlight Trims

The trims shown here may be used with any 6" IC-Rated 600, 900 and 1400 Lumen LED housings shown on page 66.

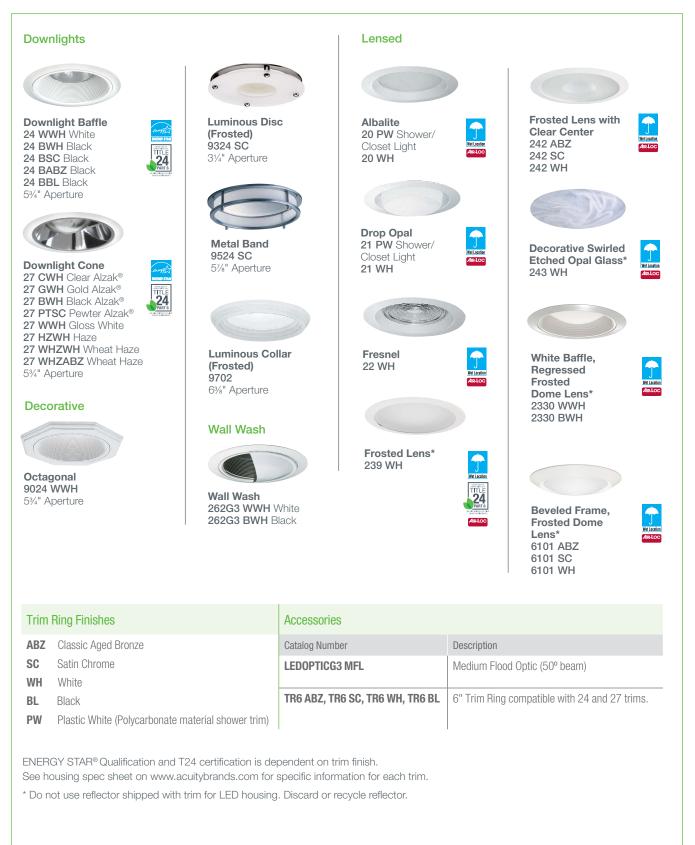

ENERGY STAR® Qualification and T24 certification is dependent on trim finish and LED color temperature. See housing spec sheet on www.acuitybrands.com for specific information for each trim.

\* Do not use reflector shipped with trim for LED housing. Discard or recycle reflector.

## 6" Deluxe Universal Housings



IC Housing Energy-efficient, Air-Loc® double wall housing can be covered with insulation. Includes Real Nail® 3 bar hangers.

IC2 6" IC new Construction Housing IC2 G with pre-installed Air-Loc gasket IC2 W with push-in electrical connectors IC2 W G with push-in electrical connectors and pre-installed Air-Loc gasket

17%" L x 9%" W x 7½" H Ceiling cutout: 6%"



#### TC Housing

Requires 3" spacing from insulation. Includes Real Nail<sup>®</sup> 3 bar hangers (unless otherwise noted).

**TC2** 6" Non-IC New Construction Housing **TC2 S** with smaller footprint bar hangers Real Nail<sup>®</sup> 2) **TC2 W** with push-in electrical connectors

131/8" L x 71/2" W x 71/2" H Ceiling cutout: 67/8"



**TC Remodel Housing** Requires 3" spacing from insulation. Installs from below ceiling.

TC2R Remodel Housing

13¾" L x 75/16" W x 5¼" min H; 7¼" max H Ceiling cutout: 6¾"

**BR30 Open Frame** 

**Trim Ring Finishes** 

SC Satin Chrome

WH White

**BL** Black

**ABZ** Classic Aged Bronze

250 ABZ

250 SC

**250 WH** 65W BB30

4" Aperture

**Note:** In Canada when insulation is present, Type IC fixtures must be used.

## 6" Deluxe Universal Trims

### Downlights



Tapered Baffle\* 24 WWH White 24 BBL Black 24 BWH Black 24 BABZ Black 24 BASC Black 75W PAR30L, 65W BR30 5%" Aperture



**Pinhole with Baffle** 23 BWH Black 50W R/PAR20 3%" Aperture



Straight Cone 26 BWH Black Alzak® 26 CWH Clear Alzak® 26 GWH Gold Alzak® 26 HZWH Haze 26 PTSC Pewter Alzak® 26 WWH Gloss White 26 WHZ WH Wheat Haze IC: 90W PAR38, 85W BR40 TC: 150W PAR38, 120W BR40 5¾" Aperture



Straight Baffle 25 WWH White 25 BWH Black 25 BBL Black 25 BSC Black IC: 85W BR40, 90W PAR38 TC: 150W PAR38, 120W BR40 5%" Aperture



PAR30 Deep Baffle 254 WWH White 254 BWH Black 75W PAR30, 100W PAR38 5%" Aperture



Tapered Cone\* 27 BWH Black Alzak® 27 CWH Clear Alzak® 27 GWH Gold Alzak® 27 HZWH Haze 27 PTSC Pewter Alzak® 27 WWH Gloss White 27 WHZABZ Wheat Haze 27 WHZWH Wheat Haze 75W PAR30L, 65W BR30 5%" Aperture



PAR30 Deep Cone 257 BWH Black Alzak® 257 CWH Clear Alzak® 257 GWH Gold Alzak® 257 HZWH Haze 257 WHZWH Wheat Haze 75W PAR30, 100W PAR38 5%" Aperture



**BR40/R40 Open Frame 251 WH** IC: 100W BR40 TC: 120W BR40, 250W R40 Heat Lamp 51/4" Aperture

#### **Housing Accessories**

 Catalog Number
 Description

 ALG6
 Energy Conserving Gasket for 6" New Construction Air-Loc® IC Housings

 G2405
 T-Bar Clips (Set of 4) for TC2 S

 TR6 ABZ TR6 SC TR6 WH TR6 BL
 6" Trim Ring compatible with 24, 25, 26, 27, 254 and 257 trims

\* Trim may be used with TC2R housing adjusted in lowest (5-1/4") height position.

# 6" Standard Universals

Standard Universal downlights are offered with basic trim options but include all the installation and performance features Juno is known for.

## 6" Standard Universal Housings



#### IC Housing

Energy-efficient, Air-Loc® housing can be covered with insulation. Includes Real Nail® 3 bar hangers (unless otherwise stated).

 IC22
 6" IC New Construction Housing

 IC22 G
 with pre-installed Air-Loc gasket

 IC22 S
 with smaller footprint bar hangers (Real Nail® 2)

 IC22 S G
 with smaller footprint bar hangers (Real Nail® 2) and pre-installed Air-Loc gasket

 IC22 W
 with push-in electrical connectors

 IC22 W G
 with push-in electrical connectors and pre-installed Air-Loc gasket

131/8" L x 71/2" W x 71/8" H Ceiling cutout: 67/8"

## 6" Standard Universal Trims



IC Remodel Housing Energy-efficient, Air-Loc® housing can be covered with insulation. Installs from below ceiling with clips provided.

IC22R 6" IC Remodel Housing

13¾" L x 7½6" W x 7½" H Ceiling cutout: 6¾"

#### **BR/PAR Downlights** Ultra-Trim Baffle -**Tapered Cone BR30 Open Frame R/PAR20** Regressed Shallow Baffle AIR-LOC 27 BWH Black Alzak® 244S WWH White 250 ABZ **Fully Enclosed\*** Eveball 27 CWH Clear Alzak® 250 SC (Wet Location w/ 228 WH 244S BWH Black Wet Locatio Air-Loc 27 GWH Gold Alzak® 60W PAR30, 65W BR30, 250 WH Outdoor Lamps) 50W R/PAR20 27 HZWH Haze 28 WWH White 75W PAR30L 65W BR30 27 PTSC Pewter Alzak® 28 BWH Black **R/PAR20** Regressed 5<sup>3</sup>/<sub>4</sub>" Aperture 4" Aperture 27 WWH Gloss White 60W A19, 65W BR30, Eyeball in Baffle 75W PAR30/30L, 27 WHZABZ Wheat Haze 248 WWH White 90W PAR38/BR40 27 WHZWH Wheat Haze 50W R/PAR20 50W PAR30, 65W BR30, 5<sup>7</sup>/<sub>8</sub>" Aperture 75W PAR30L Shallow Cone 5¾" Aperture Straight Baffle Adjustables 247S BWH Black Alzak® 25 WWH White 247S CWH Clear Alzak® 25 BBL Black 247S GWH Gold Alzak® 25 BABZ Black PAR/BR30 Regressed 247S HZWH Haze 25 BWH Black Eveball 247S WHZWH Wheat Haze 25 BSC Black 229 ABZ 75W PAR30L, 65W BR30, 50W PAR30, 65W BR30 **Tapered Baffle Cylinder Spotlight** 229 BL 75W PAR30 24 WWH White 5<sup>3</sup>/<sub>4</sub>" Aperture in Baffle 229 SC 5<sup>3</sup>/<sub>4</sub>" Aperture 24 BWH Black 226 WWH White 229 WH 24 BABZ Black Cvlinder 75W PAR30L. 24 BBL Black in White Baffle 65W BR30 226 BWH Black 24 BSC Black 75W PAR30L. Cylinder Ultra-Trim Cone -PAR/BR30 Regressed 50W PAR30, 65W BR30 in Black Baffle **Fully Enclosed\*** Eyeball in Baffle BR30 Regressed 60W PAR16 5¾" Aperture (Wet Location w/ 249 WWH White **Open Frame** Outdoor Lamps) 249 BWH Black 252 WH 29 CWH Clear Cone 75W PAR30L. 65W BR30 29 WWH White Cone 65W BR30 4" Aperture 60W A19, 65W BR30, 75W PAR30/30L, 90W PAR38/BR40 51/8" Aperture