





GENERAL PURPOSE MECHANICAL CONNECTORS

Dual-Rated Solderless Connectors

For use with both aluminum and copper conductors.

- GALVAN aluminum dual-rated connectors are manufactured from high strength 6061-T6 aluminum alloy to insure both maximum strength and conductivity.
- They are dual-rated for both copper and aluminum conductors and are electro-tin plated to provide low contact resistance and protection against corrosion.
- Assembly can be made with only a screwdriver or allen wrench and the connectors are re-useable.

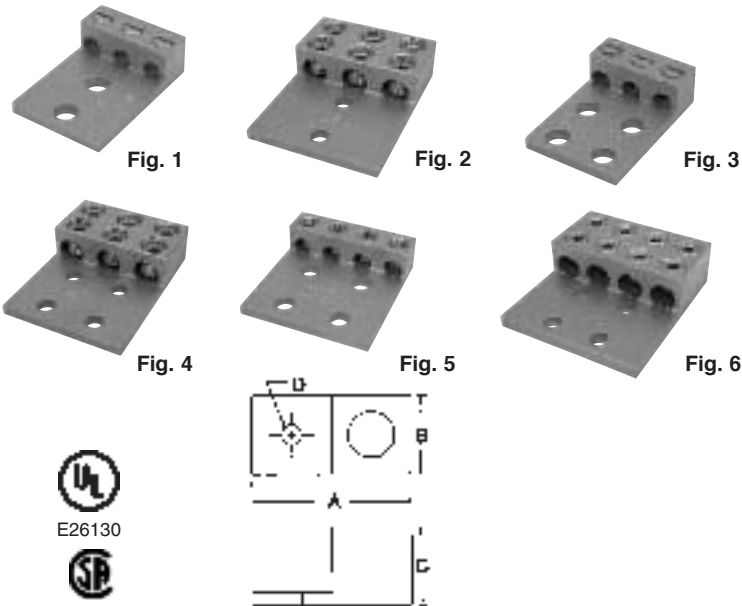

Catalog Number	Discontinued Catalog Number	Fig. No.	Cond. Range	Pcs. Per Ctn.	Wt. Per 100	Dimensions				NAED UPC No. 632591-
						A	B	C	D	
L3M2-1/0	3AB2-112	1	1/0-14	6	27	2.91	2.00	0.88	0.53	71354-2
L3M2-3/0	-	1	3/0-6	3	36	4.00	2.81	1.19	0.53	71356-6
L3M2-250	3AB2-250	1	250-6	3	52	4.00	3.00	1.19	0.53	71355-9
L3M2-350	3AB2-350	1	350-6	1	68	4.25	3.50	1.38	0.53	71357-3
L3M2-500	3AB2-500	1	500-4	1	127	4.25	3.75	1.53	0.53	71358-0
L3D2-600	A3B2-600	2	600-2	1	201	5.31	3.88	1.50	0.53	71349-8
L3D2-800	-	2	800-300	1	211	6.19	4.94	1.88	0.53	71350-4
L3D2-1000	-	2	1000-350	1	312	6.19	5.19	1.88	0.53	71348-1
L3M4-1/0	-	3	1/0-14	6	27	2.59	2.00	0.88	0.53	71359-7
L3M4-3/0	-	3	3/0-6	6	36	4.00	2.81	1.19	0.53	71362-7
L3M4-250	3AB4-250	3	250-6	3	50	4.00	3.00	1.19	0.53	71361-0
L3M4-350	3AB4-350	3	350-6	1	68	4.25	3.50	1.38	0.53	71363-4
L3M4-500	3AB4-500	3	500-4	1	110	4.25	3.75	1.53	0.53	71364-1
L3D4-600	A3B4-600	4	600-2	1	201	5.31	3.88	1.50	0.53	71352-8
L3D4-800	-	4	800-300	1	211	6.19	4.94	1.88	0.53	71353-5
L3D4-1000	A3B4-1000	4	1000-500	1	309	6.19	5.31	1.88	0.53	71351-1
L4M4-250	4AB4-250	5	250-6	1	67	4.00	4.06	1.19	0.53	71372-6
L4M4-350	4AB4-350	5	350-6	1	91	4.25	4.75	1.38	0.53	71373-3
L4M4-500	-	5	500-4	1	268	4.25	5.00	1.53	0.53	-
L4D4-600	A4B4-600	6	600-2	1	281	6.19	5.28	1.50	0.53	71366-5
L4D4-800	-	6	800-300	1	284	6.19	6.63	1.88	0.53	71367-2
L4D4-1000	A4B4-1000	6	1000-500	1	412	6.19	7.16	1.88	0.53	71365-8

Notes:

*NEMA Drilling 1 3/4" centers