



FACTORY SEALED TUMBLER SWITCHES AND GROUND FAULT INTERRUPTER



**Tumbler Switch
 Complete Unit
 (Box and Cover)**

**Ground Fault Interrupter
 Complete Unit
 (Box and Cover)**

**UGRGF Series GFI
 Control Station with
 UGR Receptacle**

**Class I, Div. 1 & 2, Groups C, D
 Class I, Zones 1 & 2, Groups IIB, IIA
 Class II, Div. 1 & 2, Groups E, F, G
 Class III
 Type 3**

FXS Tumbler Switches

UL LISTED - File E53360 and/or File E10501

SP Certified - File LR11712

FXS Ground Fault Interrupters

UL LISTED - File E80595

SP Certified - File LR61895

FEATURES-SPECIFICATIONS

Features

- Test and Reset push buttons are provided on cover assembly. Unit should be tested monthly
- Compliant to UL943 GFCI standards
- Exterior gasket provides Type 3 weatherproof protection
- Ground boss for grounding in the splice box
- Color coded wiring
- Tumbler switch comes with capability to be locked out in OFF position as standard

Materials

- Captive cover bolts are made from stainless steel
- Device bodies are cast aluminum (less than 0.04 of 1% copper).


Electrical Rating

- GFI units are rated at 20A, 120 VAC, 60HZ. Class A.
- 4-6 milliamp trip setting
- Trip Time-UL Curve



CONTROLS
FXS SERIES

FACTORY SEALED TUMBLER SWITCHES - CATALOG LOGIC

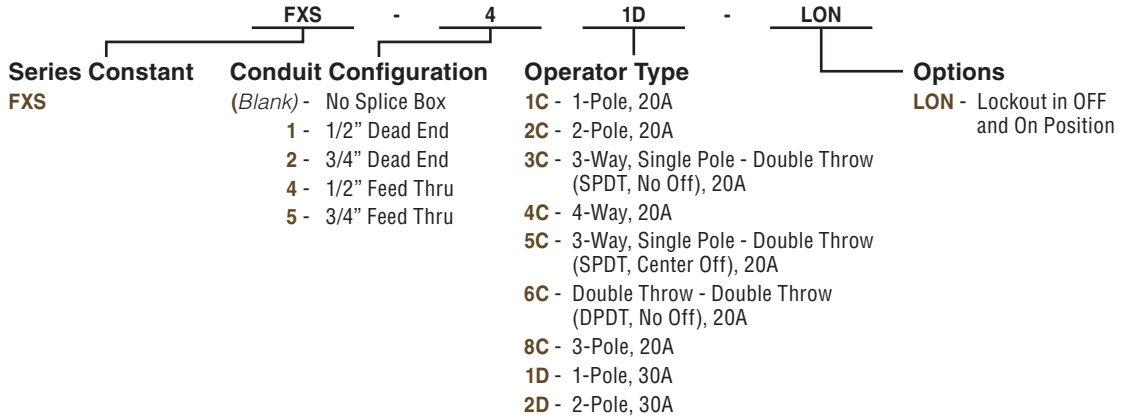

FXS TUMBLER SWITCHES					
CATALOG NUMBER			HUB SIZE	SWITCH STYLE	SWITCH RATING
COMPLETE UNIT					
COVER WITH SWITCH	(BOX, COVER AND SWITCH)				
	DEAD-END	FEED-THRU			
FXS-1C	FXS-11C	FXS-41C	1/2"	1-POLE	20 A, 120/277 VAC, 1Ø; 1 HP at 120 VAC; 2 HP at 240 VAC
	FXS-21C	FXS-51C	3/4"		
FXS-2C	FXS-12C	FXS-42C	1/2"	2-POLE	20 A, 120/277 VAC, 1Ø; 1 HP at 120 VAC; 2 HP at 240 VAC
	FXS-22C	FXS-52C	3/4"		
FXS-8C	FXS-18C	FXS-48C	1/2"	3-POLE	15 A, 240/480 VAC, 3Ø; 3 HP at 240 VAC; 5 HP at 480 VAC
	FXS-28C	FXS-58C	3/4"		
FXS-3C	FXS-13C	FXS-43C	1/2"	3-WAY/ SPDT (NO OFF)	20 A, 120/277 VAC, 1Ø; 1 HP at 120 VAC; 2 HP at 240 VAC
	FXS-23C	FXS-53C	3/4"		
FXS-5C	FXS-15C	FXS-45C	1/2"	SPDT (CENTER OFF)	20 A, 120/277 VAC, 1Ø; 1 HP at 120 VAC; 2 HP at 240 VAC
	FXS-25C	FXS-55C	3/4"		
FXS-6C	FXS-16C	FXS-46C	1/2"	DPDT (NO OFF)	20 A, 120/277 VAC, 1Ø; 1 HP at 120 VAC; 2 HP at 240 VAC
	FXS-26C	FXS-56C	3/4"		
FXS-1D	FXS-11D	FXS-41D	1/2"	1-POLE	30 A, 120/277 VAC, 1Ø; 1 HP at 120 VAC; 2 HP at 240 VAC
	FXS-21D	FXS-51D	3/4"		
FXS-2D	FXS-12D	FXS-42D	1/2"	2-POLE	30 A, 120/277 VAC, 1Ø; 1 HP at 120 VAC; 2 HP at 240 VAC
	FXS-22D	FXS-52D	3/4"		
FXS-4C	—	—	—	4-WAY	20 A, 120/277 VAC, 1Ø; 1 HP at 120 VAC; 2 HP at 240 VAC