


Mounting Pads

- Lead-N-Feature allows easy insertion for hard to reach applications
- Four-sided entry slots save time during placement orientation
- Smooth radius cradle eliminates possible damage to cable while providing stable support
- Low Profile is essential in confined spaces
- UL recognized, rubber adhesive fixing device

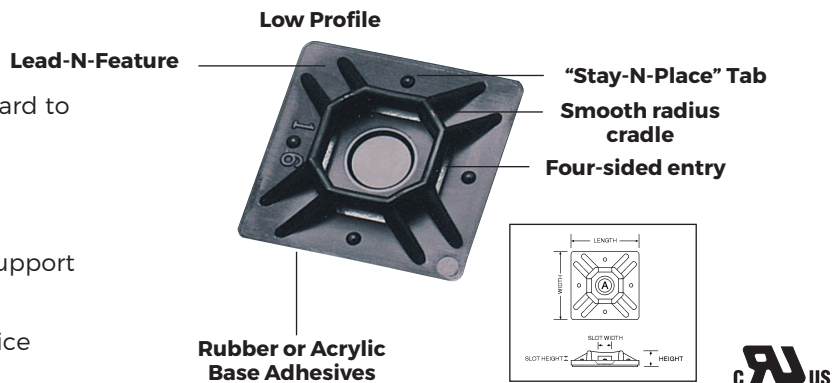

Description	Width	Height	Slot Height	Slot Width	Screw Size	UL/CSA Type	Qty./Bag	Part No.
Natural Nylon	.74 in. 19mm	.19 in. 4.8mm	.05 in. 1.2mm	.20 in. 5.1mm	No. 4	11	100	IT750MP-C
UV Black Nylon							100	IT750MP-CO
Natural Nylon	.99 in. 25mm	.20 in. 5.0mm	.06 in. 1.5mm	.20 in. 5.1mm	No. 6		100	IT1000MP-C
UV Black Nylon							100	IT1000MP-CO

Screw Mounting Bases – Standard

- Deep cradle design provides support for larger bundles and tubing
- Recessed screw hole allows cable ties to easily pass over screw head




Description	Length	Width	Height	Slot Height	Slot Width	Screw Size	UL/CSA Type	Plenum Approval	Qty./Bag	Part No.
Natural Nylon	.60 in. 15mm	.380 in. 9.60mm	.270 in. 6.86mm	.062 in. 1.59mm	.200 in. 5.05mm	No. 6	21	AH-2	100	IT1SMB-C
UV Black Nylon									100	IT1SMB-CO
Natural Nylon	.90 in. 22mm	.630 in. 16.00mm	.380 in. 9.65mm	.125 in. 3.18mm	.350 in. 8.89mm	1/4 in.			100	IT2SMB-C
UV Black Nylon									100	IT2SMB-CO



Screw Mounting Bases – Low Profile

- Perfect for confined space, control panels or other areas where space is limited

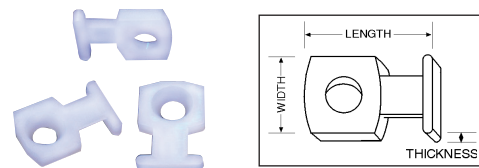

Description	Length	Width	Height	Slot Height	Slot Width	Screw Size	Qty./Bag	Part No.
Low Profile Mount	.750 in. 19mm	.500 in. 12.70mm	.120 in. 3.04mm	.062 in. 1.57mm	.180 in. 4.57mm	No. 8	100	IT1LPMB-C