


RINGER SHIELDED CABLE STRIPPER


- Spring-loaded cutting head with fixed blades are sized to insulation, eliminating adjustments.
- V-notch jaw automatically positions and holds cable, increasing cutting accuracy
- Fixed blades are sized to insulation, preventing inaccurate cuts and stainless steel construction assures long life.
- Small, lightweight design maximizes productivity while reducing fatigue.
- Wire guide roller maintains stripping head alignment, producing a square, clean cut.
- Accessory wire stop guarantees accurate repeatable strip lengths.



APPLICATIONS

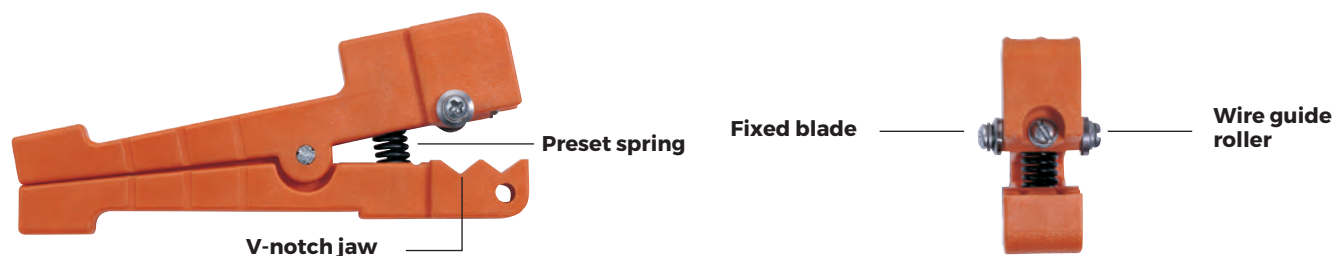

Place cable in the v-notch closest to pivot below blade. Rotate the tool down and away from you as many times as necessary to score insulation.



Remove the tool and bend cable at high spots on the score line, breaking the insulation loose.



Use the front blade to make a length-wise cut for removing long insulation slugs.



Use IDEAL Gripper™ Slug Remover (45-333) to grasp slug and pull (sold separately).



45-400
For cable diameters up to .012". Blades sold separately (listed below).



45-401
For 5 Mil insulation thickness, including Kapton®. Comes with K-6492 blade. Cable diameter from .012" to .22".



45-402
For 8-10 Mil insulation thickness, including Kynar®. Comes with K-6493 blade. Cable diameter from .012" to .22".



45-403
For cable from .012 to .22 diameter. Blades sold separately (listed below).



45-404
With "deep-V" for larger cable diameters; up to 0.30". Blades sold separately (listed below).

Kapton® is a registered trademarks of E.I. duPont de Nemours and Company. Kynar® is a registered trademark of Pennwall.

BLADES

For use with any Ringer™ Shielded Cable Stripper. Select blade with cutting depth less than insulation thickness. Contact IDEAL INDUSTRIES, INC. for FREE Application Engineering Service, blade selection, and special stripping requests.

Cutting Depth	Part #	Cutting Depth	Part #	Cutting Depth	Part #
.0030"	K-6491	.0100"	L-6497	.0180"	K-6503
.0044"	K-6492	.0110"	K-6498	.0200"	K-6504
.0060"	K-6493	.0120"	K-6499	.0220"	K-6505
.0070"	K-6494	.0130"	K-6500	.0250"	45-2108-1
.0080"	K-6495	.0140"	K-6501	.0050"	45-2780-1
.0090"	K-6496	.0160"	K-6502	.0054"	45-2777-1

WIRE STOPS

Strip Length

Up to 2-1/2" **LB-825**

2-1/2" to 5" **LB-840**

IDEAL GRIPPER™

Description

Slug Remover **45-333**