

CIRCUIT BREAKER FINDERS FEATURES

GFCI Trip



Transmitter for #61-534

GFCI
Wiring Indications
CORRECT WIRING

Non-Contact Voltage Tester



LED Indicators



Audible Tone



Polarity & Live Circuit Indication



61-534



61-532



Live Circuit Indication





TEST & MEASUREMENT



Lead Adapter Kit
Provides adapters for use in lighting fixtures.



TL-532A
Test Lead & Adapter Kit

CIRCUIT BREAKER FINDERS



61-534
Transmitter
Triple Function - Signal
Transmitter, Polarity Indicator &
GFCI Receptacle Tester



61-534
Receiver
Dual Function -
Non-Contact Voltage
Tester & Breaker Finder



61-532
Transmitter



61-532
Receiver

CIRCUIT BREAKER FINDER SELECTION GUIDE



TRANSMITTER FEATURES

	61-534	61-532
CAT Rating (Safety)	CAT II 300V	CAT II 300V
Listing	UL 1436	UL 1436
Line Voltage	Line Powered (120V AC)	Line Powered (120V AC)
Supply Frequency	47-63Hz	47-63Hz
Weight	50g (approx.)	50g (approx.)
Pulse Amplitude	18A (approx.) @ 120V	18A (approx.) @ 120V
Pulse Rate	4mS every 17ms (@ 60Hz)	4mS every 17ms (@ 60Hz)
Power Consumption	200mW max. @ 120V AC	200mW max. @ 120V AC
Operating Temperature	32° - 122°F (0 to 50°C)	32° - 122°F (0 to 50°C)
GFCI	✓	—
Polarity Indication	✓	—

RECEIVER FEATURES

	61-534	61-532
Visual and Audible Indicators	✓	✓
Low Battery Indication	✓	✓
Auto Power Off (after 10 mins. of no activity)	✓	✓
Battery Type (included)	9V	9V
Weight	0.2 lbs. (w/o battery)	0.2 lbs. (w/o battery)
Warranty	2-Year*	2-Year*

ACCESSORIES

	TL-532A	TL-532A
Light Socket and 3-prong to 2-prong Adapters, Alligator Clips		

Specifications are subject to change without notice.

ACCESSORIES



TL-532A
120V AC Circuit Breaker
Finder Adapter Kit

NEW



TL-757
Universal Test Leads
& Alligator Clips


NEW



UMHS-757
Universal Magnetic
Hanging Strap
(For use with 61-405, 61-415, 61-737,
61-747, 61-757, 61-327, 61-337, 61-347,
61-357, 61-547 & 61-557)



TC-757
Thermocouple

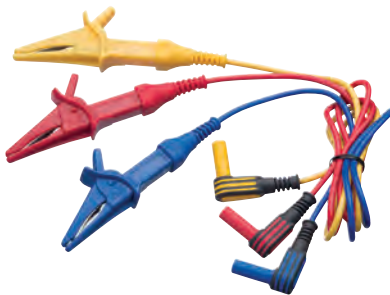

TL-521
Test Lead
Set



TL-796
Earth Resistance
Lead Set



TL-797RP
Remove Probe
Test Lead



TL-795
Test Leads w/
Alligator Clips
(premium)



61-070
Standard Test Leads
(for use with 61-076 & 61-065)



TL-956
Test Lead Set

TEST & MEASUREMENT