

HOSPITAL GRADE DEVICES

IP20
Suitability


Straight Blade Plugs & Connectors 2 Pole, 3 Wire Grounding 15 & 20A, 125 & 250V



Features

- Unit arrives completely ready-to-wire, cuts installation time significantly.
- Nylon housing provides impact and chemical resistance.
- Rugged two-piece cord provides more uniform cord retention.
- Internal dust shield keeps terminals free of contaminants.
- Tri-drive assembly screws are standard on Hospital Grade plugs and connectors (angle plugs not included).
- All 3-wire terminals located on the same plane, allows for quick wire termination from any angle.
- Heavy-duty brass alloy blades and contacts resist heat rise, provide excellent conductivity.
- Cord-grip screws recessed to protect installer against screwdriver head slippage.

CATALOG NUMBER	RATING		DESCRIPTION	CORD DIAMETER	NEMA CONFIG. NO.	3rd PARTY COMPLIANCE		
	A.	V.				UL498	FSUL WC596	C22.2 NO.42
EXTRA-HARD USE (EHU)								
PS5266XHG	15	125	Plug, Black & Clear	.230"-.720"	5-15P	•	•	•
PS5266HGAN	15	125	Angle Plug, Black & Clear	.320"-.655"	5-15P	•	•	•
PS5269XHG	15	125	Connector, Black & Clear	.230"-.720"	5-15R	•	•	•
PS5366XHG	20	125	Plug, Black & Clear	.230"-.720"	5-20P	•	•	•
PS5366HGAN	20	125	Angle Plug, Black & Clear	.320"-.655"	5-20P	•	•	•
PS5369XHG	20	125	Connector, Black & Clear	.230"-.720"	5-20R	•	•	•
PS5666XHG	15	250	Plug, Black & Clear	.230"-.720"	6-15P	•	•	•
PS5666HGAN	15	250	Angle Plug, Black & Clear	.320"-.655"	6-15P	•	•	•
PS5669XHG	15	250	Connector, Black & Clear	.230"-.720"	6-15R	•	•	•
PS5466XHG	20	250	Plug, Black & Clear	.230"-.720"	6-20P	•	•	•
PS5466HGAN	20	250	Angle Plug, Black & Clear	.320"-.655"	6-20P	•	•	•
PS5469XHG	20	250	Connector, Black & Clear	.230"-.720"	6-20R	•	•	•
MAXGRIP® M³								
PS8115	15	125	Plug, White	.230"- .720"	5-15P	•	•	•
PS8119	15	125	Connector, White	.230"- .720"	5-15R	•	•	•
PS8115BK	15	125	Plug, Black	.230"- .720"	5-15P	•	•	•
PS8119BK	15	125	Connector, Black	.230"- .720"	5-15R	•	•	•

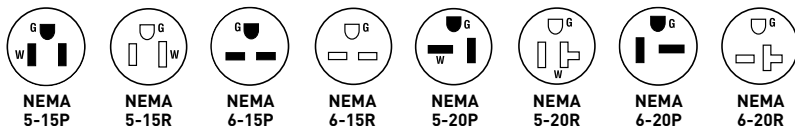

CATALOG NUMBER	DESCRIPTION
ACCESSORIES	
EHU15AN	15 & 20A EHU Straight Blade, Right Angle Adapter
FC22GL	EHU-Strain Relief Grip*
FC30GL	EHU-Strain Relief Grip*
FC40GL	EHU-Strain Relief Grip*
FC52GL	EHU-Strain Relief Grip*


*For further information consult the Flexcor® Section K.

All devices listed on this page conform to NEMA WD-1 and WD-6.


STRAIGHT BLADE PLUGS & CONNECTORS

IP20
Suitability

Hospital Grade Plugs & Connectors 2 Pole, 3 Wire Grounding 15 & 20A, 125 & 250V




PS5266XHG



PS5269XHG



PS5266HGAN



PS8115








PS8119


Features – Extra-Hard Use (EHU)

- Unit arrives completely ready-to-wire, cuts installation time significantly.
- Nylon housing provides impact and chemical resistance.
- Rugged two-piece cord grip provides more uniform cord retention.
- Internal dust shield keeps terminals free of contaminants.
- Tri-drive assembly screws are standard on Hospital Grade plugs and connectors [angle plugs not included].
- All 3-wire terminals located on the same plane, allows for quick wire termination from any angle.
- Heavy-duty brass alloy blades and contacts, resist heat rise, provide excellent conductivity.
- Cord-grip screws recessed to protect installer against screwdriver head slippage.

CATALOG NUMBER	RATING		DESCRIPTION	CORD DIAMETER	NEMA CONFIG. NO.	3rd PARTY COMPLIANCE		
	A.	V.				 UL498	FSUL WC596	 C22.2 No. 42
HOSPITAL GRADE – EXTRA-HARD USE (EHU)								
PS5266XHG	15	125	Plug, Black & Clear	.230"-.720"	5-15P	•	•	•
PS5266HGAN	15	125	Angle Plug, Black & Clear	.320"-.655"	5-15P	•	•	•
PS5269XHG	15	125	Connector, Black & Clear	.230"-.720"	5-15R	•	•	•
PS5366XHG	20	125	Plug, Black & Clear	.230"-.720"	5-20P	•	•	•
PS5366HGAN	20	125	Angle Plug, Black & Clear	.320"-.655"	5-20P	•	•	•
PS5369XHG	20	125	Connector, Black & Clear	.230"-.720"	5-20R	•	•	•
PS5666XHG	15	250	Plug, Black & Clear	.230"-.720"	6-15P	•	•	•
PS5666HGAN	15	250	Angle Plug, Black & Clear	.320"-.655"	6-15P	•	•	•
PS5669XHG	15	250	Connector, Black & Clear	.230"-.720"	6-15R	•	•	•
PS5466XHG	20	250	Plug, Black & Clear	.230"-.720"	6-20P	•	•	•
PS5466HGAN	20	250	Angle Plug, Black & Clear	.320"-.655"	6-20P	•	•	•
PS5469XHG	20	250	Connector, Black & Clear	.230"-.720"	6-20R	•	•	•
HOSPITAL GRADE MAXGRIP® M³								
PS8115	15	125	Plug, White	.230"-.720"	5-15P	•	•	•
PS8119	15	125	Connector, White	.230"-.720"	5-15R	•	•	•
PS8115BK	15	125	Plug, Black	.230"-.720"	5-15P	•	•	•
PS8119BK	15	125	Connector, Black	.230"-.720"	5-15R	•	•	•



CATALOG NUMBER	DESCRIPTION
ACCESSORIES	
EHU15AN	15 & 20A EHU Straight Blade, Right Angle Adapter
FC22GL	EHU-Strain Relief Grip*
FC30GL	EHU-Strain Relief Grip*
FC40GL	EHU-Strain Relief Grip*
FC52GL	EHU-Strain Relief Grip*

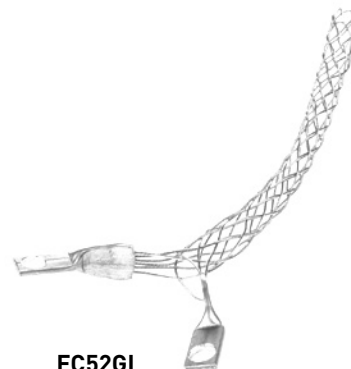

*For further information consult the Flexcor® Section K.

All devices listed on this page conform to NEMA WD-1 and WD-6.

STRAIGHT BLADE PLUGS & CONNECTORS

MaxGrip® M³ 2 Pole, 3 Wire Grounding 15 & 20A, 125 & 250V



PS5965Y & PS5969Y

Maxgrip® M³

- A. Enclosed terminals** provide solid, internally-clamped connections.
- B. Molded finger grips** promote safe, sure handling.
- C. Self-hinge** swings wide open to make quick, easy work of tight, clean connections. Insert conductors into terminals and tighten terminal screws; close hinge housing around cord and tighten housing screws.
- D. Tough nylon construction** with crush/impact resistance that exceeds hospital grade and Fed Spec requirements; arc resistance exceeds UL requirements.

Hospital Grade version displays the Hospital Grade green dot.

High-visibility yellow and orange, or gray.

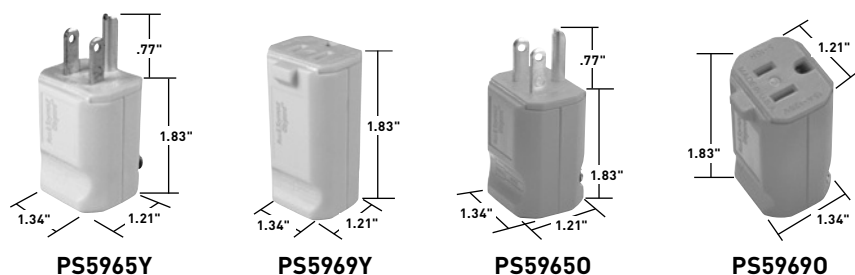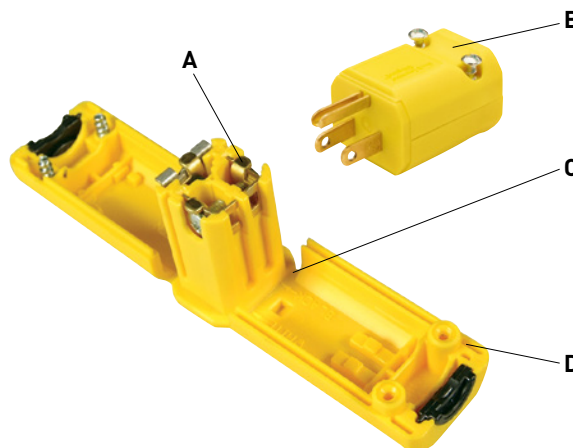

CATALOG NUMBER	RATING		DESCRIPTION	CORD DIAMETER	NEMA CONFIG. NO.	3rd PARTY COMPLIANCE	
	A.	V.				 cULus	FSUL WC596
HOSPITAL GRADE MAXGRIP® M³							
PS8115	15	125	Hospital Grade Plug, White	.230"-.720"	5-15P	•	•
PS8119	15	125	Hospital Grade Connector, White	.230"-.720"	5-15R	•	•
PS8115BK	15	125	Hospital Grade Plug, Black	.230"-.720"	5-15P	•	•
PS8119BK	15	125	Hospital Grade Connector, Black	.230"-.720"	5-15R	•	•
MAXGRIP M³							
PS5965Y	15	125	Plug, Yellow	.230"-.720"	5-15P	•	•
PS5965GRY	15	125	Plug, Gray	.230"-.720"	5-15P	•	•
PS59650	15	125	Plug, Orange	.230"-.720"	5-15P	•	•
PS5965BK	15	125	Plug, Black	.230"-.720"	5-15R	•	•
PS5969Y	15	125	Connector, Yellow	.230"-.720"	5-15R	•	•
PS5969GRY	15	125	Connector, Gray	.230"-.720"	5-15R	•	•
PS59690	15	125	Connector, Orange	.230"-.720"	5-15R	•	•
PS5969BK	15	125	Connector, Black	.230"-.720"	5-15R	•	•
PS5364Y	20	125	Plug, Yellow	.230"-.720"	5-20P	•	•
PS5364GRY	20	125	Plug, Gray	.230"-.720"	5-20P	•	•
PS5369Y	20	125	Connector, Yellow	.230"-.720"	5-20R	•	•
PS5369GRY	20	125	Connector, Gray	.230"-.720"	5-20R	•	•
PS5666Y	15	250	Plug, Yellow	.230"-.720"	6-15P	•	•
PS5669Y	15	250	Connector, Yellow	.230"-.720"	6-15R	•	•
PS5464Y	20	250	Plug, Yellow	.230"-.720"	6-20P	•	•
PS5469Y	20	250	Connector, Yellow	.230"-.720"	6-20R	•	•

