

STRAIGHT BLADE PLUGS & CONNECTORS


MaxGrip® M³ 2 Pole, 3 Wire Grounding 15 & 20A, 125 & 250V

PS5965Y & PS5969Y

MaxGrip® M³

- A. Enclosed terminals** provide solid, internally-clamped connections.
- B. Molded finger grips** promote safe, sure handling.
- C. Self-hinge** swings wide open to make quick, easy work of tight, clean connections. Insert conductors into terminals and tighten terminal screws; close hinge housing around cord and tighten housing screws.
- D. Tough nylon construction** with crush/impact resistance that exceeds hospital grade and Fed Spec requirements; arc resistance exceeds UL requirements.

High-visibility yellow and orange, or available in gray or black.

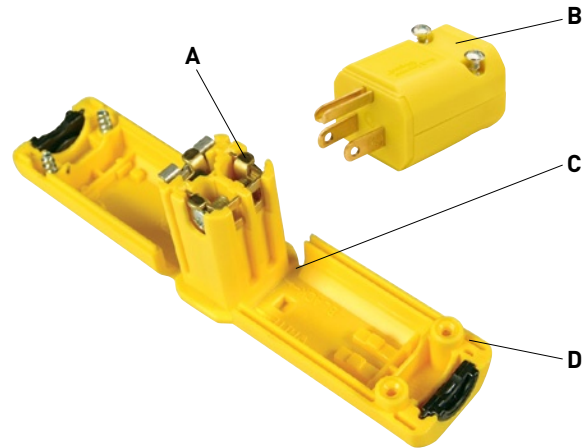

PS5965Y



PS5969Y



PS59650




PS59690

CATALOG NUMBER	RATING		DESCRIPTION	CORD DIAMETER	NEMA CONFIG. NO.	3rd PARTY COMPLIANCE	
	A.	V.				 cULus	FSUL WC596
MAXGRIP® M³							
PS5965Y	15	125	Plug, Yellow	.230"-.720"	5-15P	•	•
PS5965GRY	15	125	Plug, Gray	.230"-.720"	5-15P	•	•
PS59650	15	125	Plug, Orange	.230"-.720"	5-15P	•	•
PS5965BK	15	125	Plug, Black	.230"-.720"	5-15R	•	•
PS5969Y	15	125	Connector, Yellow	.230"-.720"	5-15R	•	•
PS5969GRY	15	125	Connector, Gray	.230"-.720"	5-15R	•	•
PS59690	15	125	Connector, Orange	.230"-.720"	5-15R	•	•
PS5969BK	15	125	Connector, Black	.230"-.720"	5-15R	•	•
PS5364Y	20	125	Plug, Yellow	.230"-.720"	5-20P	•	•
PS5364GRY	20	125	Plug, Gray	.230"-.720"	5-20P	•	•
PS5369Y	20	125	Connector, Yellow	.230"-.720"	5-20R	•	•
PS5369GRY	20	125	Connector, Gray	.230"-.720"	5-20R	•	•
PS5666Y	15	250	Plug, Yellow	.230"-.720"	6-15P	•	•
PS5669Y	15	250	Connector, Yellow	.230"-.720"	6-15R	•	•
PS5464Y	20	250	Plug, Yellow	.230"-.720"	6-20P	•	•
PS5469Y	20	250	Connector, Yellow	.230"-.720"	6-20R	•	•



NEMA 5-15P

NEMA 5-15R




NEMA 6-15P

NEMA 6-15R



NEMA 5-20P

NEMA 5-20R



NEMA 6-20P

NEMA 6-20R