


INDUSTRIAL GRADE RECEPTACLES

Industrial Extra Heavy-Duty Specification Grade Tamper-Resistant Receptacles 15 & 20A, 125V

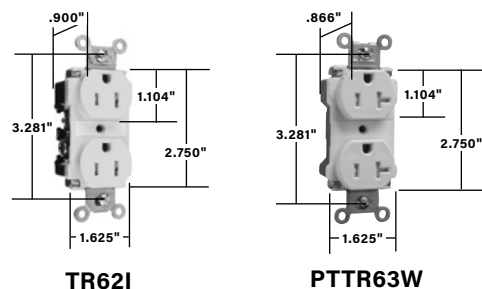

TR621

PTTR63W

Features

- Thermoplastic dual mechanism shutter system to help prevent insertion of foreign objects.
- Exclusive patented feature, circuit label on face allows permanent circuit identification.
- Extra heavy-duty brass, one-piece mounting strap with integral ground.
- One-piece, brass, triple-wipe power contacts for lasting retention.
- Strap tabs wrap around and lock down on face to prevent strap from separating from face and back body.
- Impact-resistant nylon face and back body.
- Easily accessed break-off, line-contact connecting tab for fast, easy split-circuit wiring.
- Two drive screws anchor strap to back body and face.
- Exclusive patented feature, external screw-pressure-plate back wire clamp on ground terminal for faster, easier installation.
- External screw-pressure-plate back wire clamps with #10 brass terminal screws for visual assurance of a good connection.
- Auto-ground clip assures positive ground.
- No exposed terminals create a finger safe application before, during, and after installation.
- Built-in connector features large brass terminal blades to ensure consistent, reliable electrical connections.
- Crimped and welded contacts.
- Ultrasonically welded polycarbonate connector housing secures terminations and conductors in a UL Listed, finger safe housing.
- Large brass contacts snugly terminate on device blade terminals.
- Pre-stripped connector leads fasten to conductors, easier than standard pigtails.
- Auto-ground clip assures positive ground.
- PlugTail devices install up to 5 times faster than traditional.

PlugTail® Features Only

- .036 inch thick, brass, triple-wipe power contacts for lasting retention.
- Plated steel wrap-around strap design for maximum durability and corrosion resistance.

CATALOG NUMBER	PLUGTAIL CATALOG NUMBER	RATING		COLOR	NEMA CONFIG. NO.	3rd PARTY COMPLIANCE	
		A.	V.			 US cULus	FSUL WC596
DUPLX RECEPTACLES							
TR62I	PTTR62I	15	125	Ivory	5-15R	•	•
TR62W	PTTR62W	15	125	White	5-15R	•	•
TR62		15	125	Brown	5-15R	•	•
TR62GRY		15	125	Gray	5-15R	•	•
TR62LA		15	125	Light Almond	5-15R	•	•
TR63I	PTTR63I	20	125	Ivory	5-20R	•	•
TR63W	PTTR63W	20	125	White	5-20R	•	•
TR63	PTTR63	20	125	Brown	5-20R	•	•
TR63GRY	PTTR63GRY	20	125	Gray	5-20R	•	•
TR63BK	PTTR63BK	20	125	Black	5-20R	•	•
TR63RED		20	125	Red	5-20R	•	•
TR63LA	PTTR63LA	20	125	Light Almond	5-20R	•	•
TR63BL		20	125	Blue	5-20R	•	•

2 Pole, 3 Wire



NEMA 5-15R



NEMA 5-20R

For Bulk Packaging Solutions consult factory.

designed to be better.