


HOSPITAL GRADE RECEPTACLES

Extra Heavy-Duty Hospital Grade Receptacles 15 & 20A, 125V; 20A, 250V

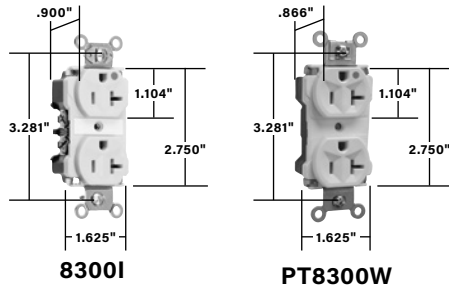


Features

- One-piece nickel-plated brass mounting strap with integral ground.
- Strap tabs wrap around and lock down on face to prevent strap from separating from face and back body.
- Two drive screws anchor strap to back body and face.
- Exclusive patented feature, circuit label on face allows permanent circuit identification.
- .040 inch thick, nickel-plated brass, triple-wipe power contacts for lasting retention.
- Easily accessed break-off, line-contact connecting tab for fast, easy split-circuit wiring.
- Impact-resistant nylon face and back body.
- Oversized #10 deep tri-drive head brass terminal and ground screws.
- Exclusive patented feature, external screw-pressure-plate back wire clamp on ground terminal for faster, easier installation.
- External nickel-plated screw-pressure-plate back wire clamps with #10 brass terminal screws for visual assurance of a good connection.
- Line terminals accept #14 – #10 AWG stranded or solid copper clad conductors.
- Auto-ground clip assures positive ground.
- Built-in connector features large brass terminal blades to ensure consistent, reliable electrical connections.
- Crimped and welded contacts.
- Ultrasonically welded polycarbonate connector housing secures terminations and conductors in a UL Listed, finger safe housing.
- Large brass contacts snugly terminate on device blade terminals.
- Pre-stripped connector leads fasten to conductors, easier than standard pigtails.
- Auto-ground clip assures positive ground.
- PlugTail devices install up to 5 times faster than traditional.

PlugTail® Features Only

- .036 inch thick, brass, triple-wipe power contacts for lasting retention.
- Plated steel wrap-around strap design for maximum durability and corrosion resistance.
- No exposed terminals create a finger safe application before, during, and after installation.

CATALOG NUMBER	PLUGTAIL CATALOG NUMBER	RATING		COLOR	NEMA CONFIG. NO.	3rd PARTY COMPLIANCE	
		A.	V.			 UL498	FSUL WC596
Duplex Receptacles							
8200I	PT8200I	15	125	Ivory	5-15R	•	•
8200W	PT8200W	15	125	White	5-15R	•	•
8200		15	125	Brown	5-15R	•	•
8200GRY	PT8200GRY	15	125	Gray	5-15R	•	•
8200BK	PT8200BK	15	125	Black	5-15R	•	•
8200RED	PT8200RED	15	125	Red	5-15R	•	•
8200LA	PT8200LA	15	125	Light Almond	5-15R	•	•
	PT8200BL	15	125	Light Almond	5-15R	•	•
8300I	PT8300I	20	125	Ivory	5-20R	•	•
8300W	PT8300W	20	125	White	5-20R	•	•
8300	PT8300	20	125	Brown	5-20R	•	•
8300GRY	PT8300GRY	20	125	Gray	5-20R	•	•
8300BK	PT8300BK	20	125	Black	5-20R	•	•
8300RED	PT8300RED	20	125	Red	5-20R	•	•
8300LA	PT8300LA	20	125	Light Almond	5-20R	•	•
	PT8300BL	20	125	Light Almond	5-20R	•	•
8800I		20	250	Ivory	6-20R	•	•
8800W		20	250	White	6-20R	•	•
8800		20	250	Brown	6-20R	•	•
8800GRY		20	250	Gray	6-20R	•	•
8800BK		20	250	Black	6-20R	•	•
8800LA		20	250	Light Almond	6-20R	•	•
8800RED		20	250	Red	6-20R	•	•

For Bulk Packaging Solutions consult factory.

2 Pole, 3 Wire

