



SURGE PROTECTIVE & ISOLATED GROUND DEVICES


Turnlok® Isolated Ground Receptacles 2 Pole, 3 Wire 15, 20 & 30A




IG4700




IG4710



20 Amp Receptacle



30 Amp Receptacle



IGL620P

CATALOG NUMBER	RATING		NEMA CONFIG. NO.	COLOR	3rd PARTY COMPLIANCE	
	A.	V.			 UL498	 C22.2 No. 42
2 POLE, 3 WIRE GROUNDING, ORANGE BACK WIRE						
IG4700RED	15	125	L5-15R	Red	•	•
IG4700	15	125	L5-15R	Orange	•	•
IG4710	15	125	L5-15R	Orange	•	•
IG4760	15	277	L7-15R	Orange	•	•
IGL520R	20	125	L5-20R	Orange	•	•
IGL620R	20	250	L6-20R	Orange	•	•
IGL720R	20	277	L7-20R	Orange	•	•
IGL820R	20	480	L8-20R	Orange	•	•
IGL530R	30	125	L5-30R	Orange	•	•
IGL630R	30	250	L6-30R	Orange	•	•
3 POLE, 4 WIRE GROUNDING, ORANGE BACK WIRE						
IGL1420R	20	125/250	L14-20R	Orange	•	•
IGL1520R	20	3ø, 250	L15-20R	Orange	•	•
IGL1620R	20	3ø, 480	L16-20R	Orange	•	•
IGL1430R	30	125/250	L14-30R	Orange	•	•
IGL1530R	30	3ø, 250	L15-30R	Orange	•	•
4 POLE, 5 WIRE GROUNDING, ORANGE BACK WIRE						
IGL2120R	20	3øY, 120/208	L21-20R	Orange	•	•
IGL2220R	20	3øY, 277/480	L22-20R	Orange	•	•
IGL2320R	20	3øY, 347/600	L23-20R	Orange	•	•
IGL2130R	30	3øY, 120/208	L21-30R	Orange	•	•
IGL2230R	30	3øY, 277/480	L22-30R	Orange	•	•
IGL2330R	30	3øY, 347/600	L23-30R	Orange	•	•



NEMA L5-15R



NEMA L5-20R



NEMA L5-30R



NEMA L6-20R



NEMA L6-30R



NEMA L7-15R



NEMA L7-20R



NEMA L8-20R



NEMA L14-20R



NEMA L14-30R



NEMA L15-20R



NEMA L15-30R



NEMA L16-20R



NEMA L21-20R



NEMA L22-20R



NEMA L23-20R



NEMA L21-30R



NEMA L22-30R




NEMA L23-30R

Consult Turnlok products starting on page 220 for complete line of Turnlok Locking Devices.

TURNLOK® LOCKING DEVICES


20 Amp NEMA L1420, L1520 & L1620 3 Pole, 4 Wire 20A, 125/250V; 3ø, 250 & 480V




20A Receptacle



20A Connector



20A Plug

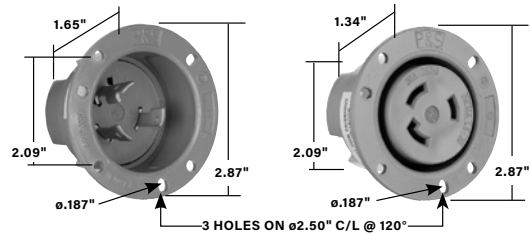

20A Flanged Inlet & Outlet

CATALOG NUMBER	RATING		DESCRIPTION/COLOR	CORD DIAMETER	NEMA CONFIG. NO.	3rd PARTY COMPLIANCE		
	A.	V.				 UL498	 FSUL WC596	 CSA
RECEPTACLES								
L1420R	20	125/250	Single Receptacle, Black		L14-20R	•	•	•
L1420RR	20	125/250	Single Receptacle, Red		L14-20R	•	•	•
IGL1420R	20	125/250	Single Receptacle, Orange, Isolated Ground		L14-20R	•		•
L1520R	20	3ø, 250	Single Receptacle, Black		L15-20R	•	•	•
IGL1520R	20	3ø, 250	Single Receptacle, Orange, Isolated Ground		L15-20R	•		•
L1620R	20	3ø, 480	Single Receptacle, Black		L16-20R	•	•	•
IGL1620R	20	3ø, 480	Single Receptacle, Orange, Isolated Ground		L16-20R	•		•
CONNECTORS IP20 SUITABILITY								
L1420C	20	125/250	Black Back, White Front Body	.225"-1.150"	L14-20R	•	•	•
CRL1420C	20	125/250	Yellow Back, White Front Body, Corrosion-Resistant	.225"-1.150"	L14-20R	•	•	•
L1520C	20	3ø, 250	Black Back, White Front Body	.225"-1.150"	L15-20R	•	•	•
L1520CBK	20	3ø, 250	Black Back, Black Front Body	.225"-1.150"	L15-20R	•	•	•
L1620C	20	3ø, 480	Black Back, White Front Body	.225"-1.150"	L16-20R	•	•	•
PLUGS IP20 SUITABILITY								
L1420P	20	125/250	Black Back, White Front Body	.225"-1.150"	L14-20P	•	•	•
CRL1420P	20	125/250	Yellow Back, White Front Body, Corrosion-Resistant	.225"-1.150"	L14-20P	•	•	•
L1520P	20	3ø, 250	Black Back, White Front Body	.225"-1.150"	L15-20P	•	•	•
L1520PBK	20	3ø, 250	Black Back, Black Front Body	.225"-1.150"	L15-20P	•	•	•
L1620P	20	3ø, 480	Black Back, White Front Body	.225"-1.150"	L16-20P	•	•	•
FLANGED INLETS & OUTLETS								
L1420FI	20	125/250	Gray Inlet		L14-20P	•		•
L1420FO	20	125/250	Gray Outlet		L14-20R	•		•
L1520FI	20	3ø, 250	Gray Inlet		L15-20P	•		•
L1520FO	20	3ø, 250	Gray Outlet		L15-20R	•		•
L1520FIBK	20	3ø, 250	Black Inlet		L15-20P	•		•
L1520FOBK	20	3ø, 250	Black Outlet		L15-20R	•		•
L1620FI	20	3ø, 480	Gray Inlet		L16-20P	•		•
L1620FO	20	3ø, 480	Gray Outlet		L16-20R	•		•



NEMA L14-20P



NEMA L14-20R



NEMA L15-20P



NEMA L15-20R



NEMA L16-20P



NEMA L16-20R

Reference pages 252 and 253 for Accessories.

All devices listed on this page conform to NEMA WD-1 and WD-6.

WWW.LEGRAND.US/PASSANDSEYMOUR

designed to be better.

TURNLOK® LOCKING DEVICES

NEMA Configurations

Locking Plugs & Receptacles

		15 AMPERE		20 AMPERE		30 AMPERE	
		RECEPTACLE	PLUG	RECEPTACLE	PLUG	RECEPTACLE	PLUG
2 POLE, 2 WIRE NON-GROUNDING							
125V	L1	L1-15R	L1-15P				
250V	L2			L2-20R	L2-20P		
2 POLE, 3 WIRE GROUNDING							
125V	L5	L5-15R	L5-15P	L5-20R	L5-20P	L5-30R	5-30P
250V	L6	L6-15R	L6-15P	L6-20R	L6-20P	L6-30R	6-30P
277VAC	L7	L7-15R	L7-15P	L7-20R	L7-20P	L7-30R	7-30P
347VAC	L24			L24-20R	L24-20P		
480VAC	L8			L8-20R	L8-20P	L8-30R	L8-30P
600VAC	L9			L9-20R	L9-20P	L9-30R	L9-30P
3 POLE, 3 WIRE NON-GROUNDING							
125/250V	L10			L10-20R	L10-20P	L10-30R	L10-30P
3Ø250V	L11			L11-20R	L11-20P	L11-30R	L11-30P
3Ø480V	L12			L12-20R	L12-20P	L12-30R	L12-30P
3Ø600V	L13					L13-30R	L13-30P
3 POLE, 4 WIRE GROUNDING							
125/250V	L14			L14-20R	L14-20P	L14-30R	L14-30P
3Ø250V	L15			L15-20R	L15-20P	L15-30R	L15-30P
3Ø480V	L16			L16-20R	L16-20P	L16-30R	L16-30P
3Ø600V	L17					L17-30R	L17-30P
4 POLE, 4 WIRE NON-GROUNDING							
3ØY 120/208V	L18			L18-20R	L18-20P	L18-30R	L18-30P
3ØY 277/480V	L19			L19-20R	L19-20P	L19-30R	L19-30P
3ØY 347/600V	L20			L20-20R	L20-20P	L20-30R	L20-30P
4 POLE, 5 WIRE GROUNDING							
3ØY 120/208V	L21			L21-20R	L21-20P	L21-30R	L21-30P
3ØY 277/480V	L22			L22-20R	L22-20P	L22-30R	L22-30P
3ØY 347/600V	L23			L23-20R	L23-20P	L23-30R	L23-30P

Midget - Locking


		15 AMPERE	
		RECEPTACLE	PLUG
2 POLE, 2 WIRE NON-GROUNDING			
125V	ML1	ML-1R	ML-1P
2 POLE, 3 WIRE GROUNDING			
125V	ML2	ML-2R	ML-2P
3 POLE, 3 WIRE NON-GROUNDING			
125/250V	ML3	ML-3R	ML-3P

Labels & Their Meaning

X, Y, Z	Hot Lead
W	Neutral Lead
G	Grounding Lead

Open Slots

Indicate receptacle configurations (female).



Closed Slots

Indicate plug blade configurations (male).

