



STRAIGHT BLADE PLUGS & CONNECTORS

Miscellaneous Configurations

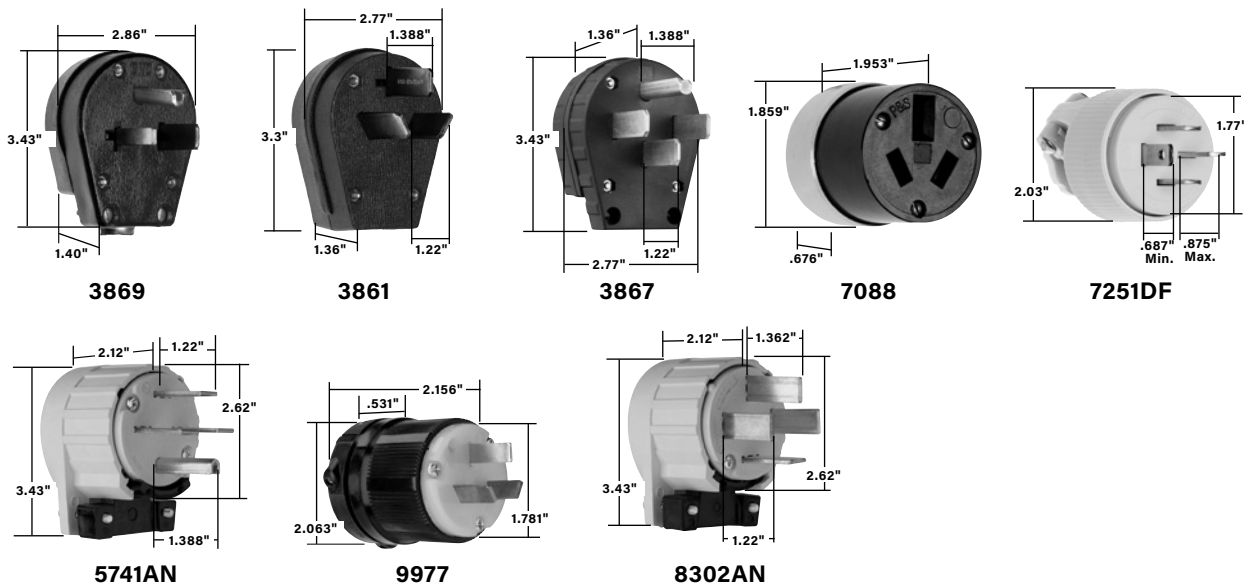

CATALOG NUMBER	RATING		DESCRIPTION	CORD DIAMETER	NEMA CONFIG. NO.	3rd PARTY COMPLIANCE		
	A.	V.				 UL498	FSUL WC596	 cULus
2 POLE, 3 WIRE GROUNDING								
43379	30	125	Angled Plug, Yellow	.56"-1.1"	5-30P	▪		
43399	50	125	Angled Plug, Yellow		5-50P	▪		
3869	30/50	250	Angled Plug, Black		6-30P/6-50P	▪		
3 POLE, 3 WIRE NON-GROUNDING								
3861	30/50	125/250	Angled Plug, Black	.56"-1.1"	10-30P/10-50P	▪		▪
9977	20	125/250	Plug, Nylon		10-20P	▪		
7088	20	125/250	Connector, Armored		10-20R			
3 POLE, 4 WIRE GROUNDING								
5746AN	30	125/250	Angled Plug, Yellow	.56"-1.1"	14-30P	▪		▪
5741AN	30	3ø, 250	Angled Plug, Yellow		15-30P	▪		▪
5745AN	50	125/250	Angled Plug, Yellow		14-50P	▪		▪
14629	60	125/250	Angled Plug, Yellow		14-60P	▪		
5751AN	50	3ø, 250	Angled Plug, Yellow		15-50P	▪		▪
5761AN	60	3ø, 250	Angled Plug, Yellow		15-60P	▪		▪
3867	30/50	125/250	Angled Plug, Black		14-30P/14-50P	▪		▪
4 POLE, 4 WIRE NON-GROUNDING								
7251DF	20	3øY, 120/208	Plug, Yellow	.365"-.775"	18-20P	▪	▪	
8302AN	60	3øY, 120/208	Angled Plug, Yellow		18-60P	▪		

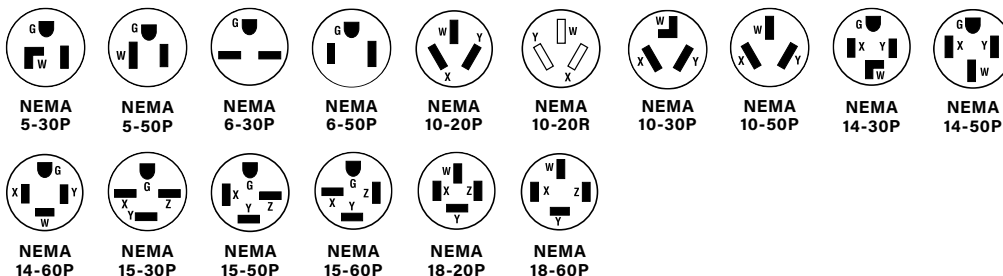

All devices listed on this page conform to NEMA WD-1 and WD-6.