


# TURNLOK® LOCKING DEVICES


## L630C & L630P Connector & Plug

- A. Raised ribs** provide non-slip gripping profile for turning to lock and unlock.
- B. Quick-thread assembly screws** and cord-grip screws come backed-out, ready-to-wire.
- C. Industrial-strength, brass alloy plug blades**, and connector contacts resist heat rise, provide excellent conductivity.
- D. Rounded back contour** reduces snags and hang-ups on the job site.
- E. Impact- and corrosion-resistant** heavy-duty nylon shell material resistant to impacts and abuse.
- F. Integral flexible rubber cord grommet** conforms to and seals around SO cord to provide protection from oils, water, or chips entering wiring chamber.
- G. New-design external cord grips** provide visible assurance of safe and proper cord retention and a wide range of OD acceptance.
- H. Scallop shell design** provides non-slip gripping surface for insertion and withdrawal.
- I. Double dovetail design** provides superior protection against cord pull-out forces.
- J. Visible stamped NEMA configuration and device rating.**

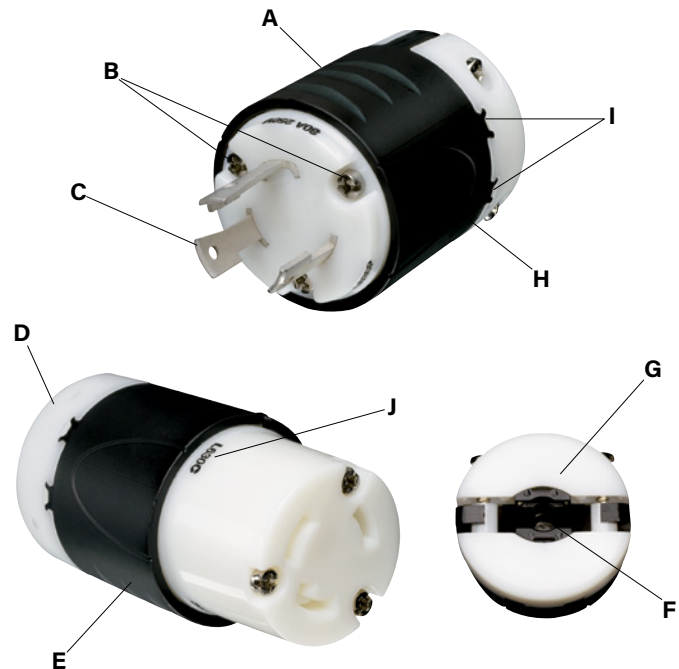

## L630R Receptacles

- A. Compact, impact-resistant nylon face and body** are ultrasonically welded together for unrivaled strength.
- B. Clearly marked NEMA configuration, rating, and third party listing** on each unit's face.
- C. One-piece, high-grade brass contacts** offer excellent conductivity and heat-rise resistance.
- D. Single-piece, solid brass mounting strap** is free of easily loosened rivets found on other brands.
- E. Side and external screw-pressure-plate back wire capability.** Accepts #14 - #10 AWG.

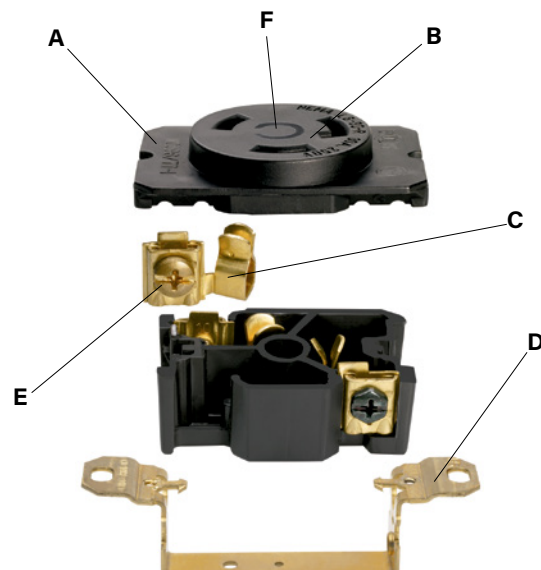

**F. P&S Turnlok Receptacles.** Voltage color coding on the outside. Proven designs and quality materials on the inside. Any way you look at them, they're the standard of the industry.



125V



250V



277VAC



480VAC




600VAC




125/250V

# TURNLOK® LOCKING DEVICES


**30 Amp NEMA L630 & L730** 2 Pole, 3 Wire 30A, 250 & 277V




**30A Receptacle**




**30A Connector**



**30A Plug**

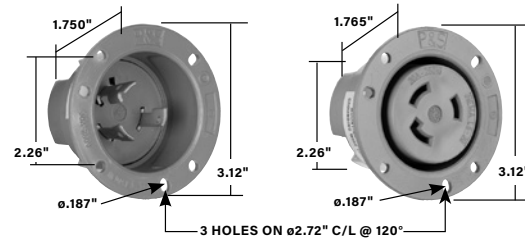


**30A Flanged Inlet & Outlet**

CATALOG NUMBER	RATING		DESCRIPTION/COLOR	CORD DIAMETER	NEMA CONFIG. NO.	3rd PARTY COMPLIANCE		
	A.	V.				 UL498	FSUL WC596	 CSA
RECEPTACLES								
L630R	30	250	Single Receptacle, Black		L6-30R	•	•	•
L630RBL	30	250	Single Receptacle, Blue		L6-30R	•	•	•
L630RR	30	250	Single Receptacle, Red		L6-30R	•	•	•
IGL630R	30	250	Single Receptacle, Orange, Isolated Ground		L6-30R	•		•
L730R	30	277	Single Receptacle, Black		L7-30R	•	•	•
CONNECTORS IP20 SUITABILITY								
L630C	30	250	Black Back, White Front Body	.225"-.750"	L6-30R	•	•	•
CRL630C	30	250	Yellow Back, White Front Body, Corrosion-Resistant	.225"-.750"	L6-30R	•	•	•
L730C	30	277	Black Back, White Front Body	.225"-.750"	L7-30R	•	•	•
PLUGS IP20 SUITABILITY								
L630P	30	250	Black Back, White Front Body	.225"-.750"	L6-30P	•	•	•
CRL630P	30	250	Yellow Back, White Front Body, Corrosion-Resistant	.225"-.750"	L6-30P	•	•	•
L730P	30	277	Black Back, White Front Body	.225"-.750"	L7-30P	•	•	•
FLANGED INLETS & OUTLETS								
L630FI	30	250	Gray Inlet		L6-30P	•		•
L630FO	30	250	Gray Outlet		L6-30R	•		•
L730FI	30	277	Gray Inlet		L7-30P	•		•
L730FO	30	277	Gray Outlet		L7-30R	•		•



**NEMA L6-30P**      **NEMA L6-30R**



**NEMA L7-30P**      **NEMA L7-30R**

Reference pages 252 and 253 for Accessories.

CATALOG NUMBER	DESCRIPTION	COLOR
<b>WEATHERPROOF COVER</b>		
<b>WPG2</b>	Cover for 20 and 30A Turnlok Flanged Inlets and Outlets	Gray
<b>STAINLESS STEEL WALL PLATE</b>		
<b>SS720</b>	Wall Plate for Locking Receptacles	302/304 S/S



**WPG2**

All devices listed on this page conform to NEMA WD-1 and WD-6.

WWW.LEGRAND.US/PASSANDSEYMOUR

designed to be better.