


TURNLOK® LOCKING DEVICES


20 Amp Non-NEMA 3 Pole, 4 Wire 20A, 3ØY, 250V; 10A, 600V; 4 Pole, 4 Wire 20A, 3ØY, 120/208V




20A Receptacle



20A Connector



20A Plug

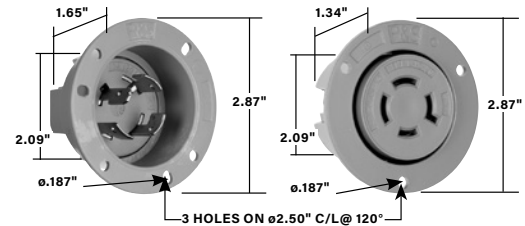

20A Flanged Inlet & Outlet

CATALOG NUMBER	RATING		DESCRIPTION/COLOR	CORD DIAMETER	3rd PARTY COMPLIANCE		
	A.	V.			 UL498	 FSUL WC596	 CSA
RECEPTACLES							
7410G*	20 10	3øY, 250 600	Single Receptacle, Grounded, Black			•	
7410	20	3øY, 120/208	Single Receptacle, Black		•	•	
CONNECTORS IP20 SUITABILITY							
7413G*	20 10	3øY, 250 600	Yellow	.333"-1.060"			
7413SS	20	3øY, 120/208	Black Back, White Front Body	.225"-1.150"	•	•	
PLUGS IP20 SUITABILITY							
7411G*	20 10	3øY, 250 600	Yellow	.333"-1.060"			
7411SS	20	3øY, 120/208	Black Back, White Front Body	.225"-1.150"	•	•	
FLANGED INLETS & OUTLETS							
7408SS	20	3øY, 120/208	Gray Inlet		•		
7409SS	20	3øY, 120/208	Gray Outlet		•		



**Non-NEMA
7408SS
7411SS**



**Non-NEMA
7409SS, 7410
7413SS**




**Non-NEMA
7411G**



**Non-NEMA
7410G
7413G**

*For replacement use only.
Reference pages 252 and 253 for Accessories.

CATALOG NUMBER	DESCRIPTION	COLOR
WEATHERPROOF COVER		
WPG2	Cover for 20 and 30A Turnlok Flanged Inlets and Outlets	Gray
STAINLESS STEEL WALL PLATE		
SS720	Wall Plate for Locking Receptacles	302/304 S/S
WEATHERPROOF BOOTS		
L15RBC	Boot for 15A Locking Connector	Black
L15RBP	Boot for 15A Locking Plug	Black
L2030RBC	Boot for 20/30A Locking Connector	Black
L2030RBP	Boot for 20/30A Locking Plug	Black
CORROSION-RESISTANT BOOTS		
CRL2030RBC	Boot for 20/30A Locking Connector	Yellow
CRL2030RBP	Boot for 20/30A Locking Plug	Yellow



WPG2



L15RBC



**L2030RBC
CRL2030RBC**

All devices listed on this page conform to NEMA WD-1 and WD-6.