



TURNLOK® LOCKING DEVICES

30 Amp Non-NEMA 3 Pole, 4 Wire 30A, 3ØY 250V; 10A, 600V; 4 Pole, 4 Wire 30A, 3ØY, 120/208V

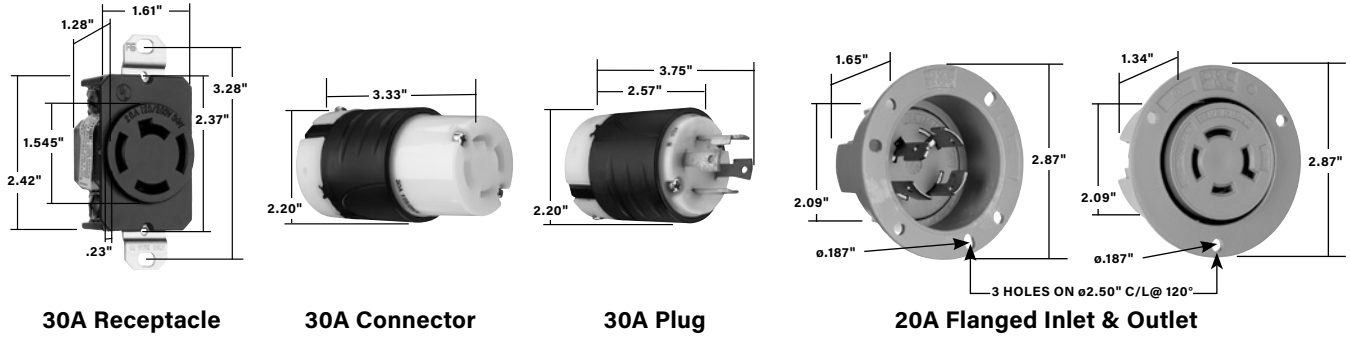


CATALOG NUMBER	RATING		DESCRIPTION/COLOR	CORD DIAMETER	3rd PARTY COMPLIANCE		
	A.	V.			 UL498	FSUL WC596	 CSA
RECEPTACLES							
3430	30	3ØY, 120/208	Single Receptacle, Black		•	•	
CONNECTORS IP20 SUITABILITY							
3433SS	30	3ØY, 120/208	Black Back, White Front Body	.225"-1.150"	•	•	
PLUGS IP20 SUITABILITY							
3431G*	30 10	3ØY, 250 600	Yellow	.333"-1.060"			
3431SS	30	3ØY, 120/208	Black Back, White Front Body	.225"-1.150"	•	•	
FLANGED INLETS & OUTLETS							
3434SS	30	3ØY, 120/208	Gray Inlet		•		
3435SS	30	3ØY, 120/208	Gray Outlet		•		



*For replacement use only.
Reference pages 252 and 253 for Accessories.

CATALOG NUMBER	DESCRIPTION	COLOR
WEATHERPROOF COVER		
WPG2	Cover for 20 and 30A Turnlok Flanged Inlets and Outlets	Gray
STAINLESS STEEL WALL PLATE		
SS720	Wall Plate for Locking Receptacles	302/304 S/S



WPG2

All devices listed on this page conform to NEMA WD-1 and WD-6.