




















RESIDENTIAL RECEPTACLES

Power Outlet Receptacles & Plugs 20, 30, 50, & 60A

										
RATING			RECEPTACLE/PLUG CONFIGURATION & NEMA NO.		FLUSH RECEPTACLE	WALL PLATE *For 2 screw mounting **For 4 screw mounting	SURFACE RECEPTACLE	PLUG	ANGLE PLUG	CONNECTOR
A.	V.	CATALOG NUMBERS								
2 POLE, 3 WIRE GROUNDING										
30	125	5-30			3802\$ AL/CU	1-Gang: TP724* 2-Gang: SS702* 2-Gang: TP703**		D0531 .57"-1.26"		D0533 .57"-1.26"
30	125	NEMA TT30			3830 AL/CU	1-Gang: TP724* 2-Gang: SS702* 2-Gang: TP703**				
For recreational vehicles.										
30	250	6-30			3801 AL/CU	1-Gang: TP724* 2-Gang: SS702* 2-Gang: TP703**		D0631 .57"-1.26"	3869	D0633 .57"-1.26"
50	125	5-50						D0551 .57"-1.26"		D0553 .57"-1.26"
50	250	6-50			3804\$ AL/CU	1-Gang: TP724* 2-Gang: SS702* 2-Gang: TP703**	3852# AL/CU	D0651 .57"-1.26"	3869	D0653 .57"-1.26"
3 POLE, 3 WIRE NON-GROUNDING										
30	125/250 Dryer	10-30			3860 AL/CU	1-Gang: TP724* 2-Gang: SS702* 2-Gang: TP703**	388 AL/CU	1031	3861	
50	125/250 Range	10-50			3890\$ AL/CU	1-Gang: TP724* 2-Gang: SS702* 2-Gang: TP703**	385 AL/CU	1051 .57"-1.26"	3861	1053 .32"-.91"
3 POLE, 4 WIRE GROUNDING										
20	125/250	14-20			3820	1-Gang: SS7*				
30	125/250 Dryer	14-30			3864 AL/CU 3864NA†	2-Gang: SS702* 2-Gang: TP703**	3884#/388440† AL/CU	1431 .57"-1.26"	5746AN 3867	
30	3ø, 250	15-30			5740 AL/CU	2-Gang: SS702* 2-Gang: TP703**			5741AN	
50	125/250 Range	14-50			3894\$ AL/CU 3894NA†	2-Gang: SS702* 2-Gang: TP703**	3854#/385440† AL/CU	1451 .57"-1.26"	5745AN 3867	
50	3ø, 250	15-50			5750 AL/CU	2-Gang: SS702* 2-Gang: TP703**			5751AN	
60	3ø, 250	15-60			5760 AL/CU	2-Gang: SS702* 2-Gang: TP703**		8462N	5761AN	
4 POLE, 4 WIRE NON-GROUNDING										
20	3øY, 120/208	18-20			3822	1-Gang: SS7*		7251DF .35"-1.05"		
60	3øY, 120/208	18-60			3870\$ AL/CU	2-Gang: SS701**		D1861 .57"-1.26"	8302AN	

* In bulk pack of 40 with plastic snap-in wire clamp.

§ Up to #3 AWG aluminum conductors.


Up to #4 AWG aluminum conductors.

For further information consult Wall Plate Section.


† North American Receptacles are ideal for use on projects subject to the provisions of the Buy American Act.

RESIDENTIAL RECEPTACLES

Power Outlet Receptacles & Plugs 20, 30, 50, & 60A




3822




3820




**385 3854
388 3884
3852**




3870




**3801 3802
3804 3864
3894 5740
5750 5760**




**3830
3860
3890**




3861




3867



3869




**5741AN 5745AN
5746AN 5751AN
5761AN 8302AN**




7251DF

STRAIGHT BLADE PLUGS & CONNECTORS

Miscellaneous Configurations

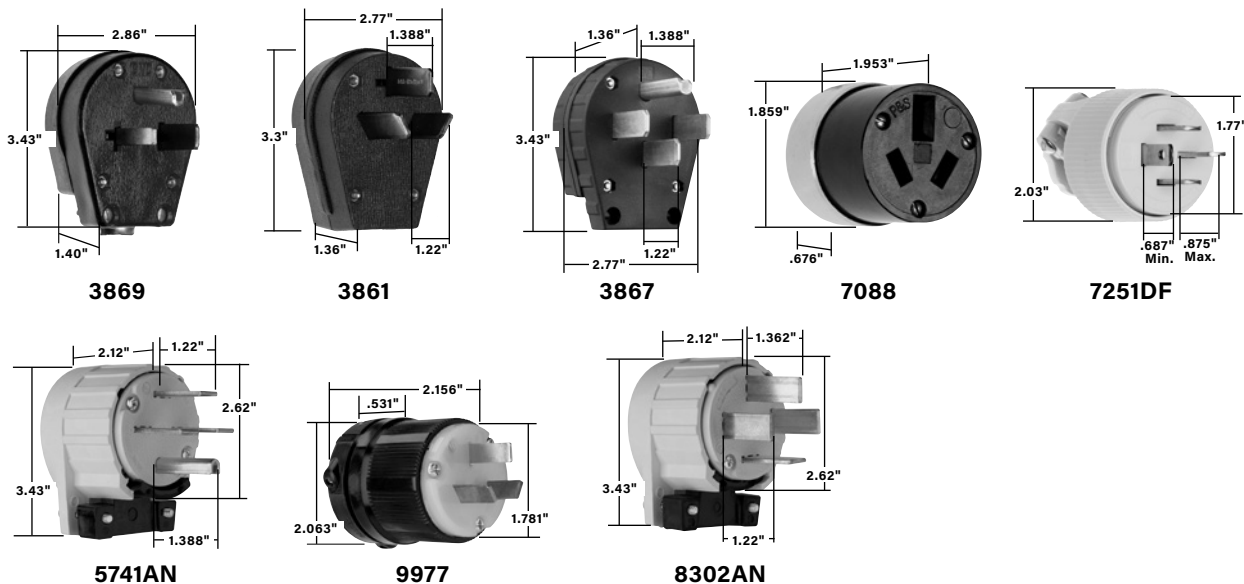

CATALOG NUMBER	RATING		DESCRIPTION	CORD DIAMETER	NEMA CONFIG. NO.	3rd PARTY COMPLIANCE		
	A.	V.				 UL498	FSUL WC596	 cULus
2 POLE, 3 WIRE GROUNDING								
43379	30	125	Angled Plug, Yellow	.56"-1.1"	5-30P	▪		
43399	50	125	Angled Plug, Yellow		5-50P	▪		
3869	30/50	250	Angled Plug, Black		6-30P/6-50P	▪		
3 POLE, 3 WIRE NON-GROUNDING								
3861	30/50	125/250	Angled Plug, Black	.56"-1.1"	10-30P/10-50P	▪		▪
9977	20	125/250	Plug, Nylon		10-20P	▪		
7088	20	125/250	Connector, Armored		10-20R			
3 POLE, 4 WIRE GROUNDING								
5746AN	30	125/250	Angled Plug, Yellow	.56"-1.1"	14-30P	▪		▪
5741AN	30	3ø, 250	Angled Plug, Yellow		15-30P	▪		▪
5745AN	50	125/250	Angled Plug, Yellow		14-50P	▪		▪
14629	60	125/250	Angled Plug, Yellow		14-60P	▪		
5751AN	50	3ø, 250	Angled Plug, Yellow		15-50P	▪		▪
5761AN	60	3ø, 250	Angled Plug, Yellow		15-60P	▪		▪
3867	30/50	125/250	Angled Plug, Black		14-30P/14-50P	▪		▪
4 POLE, 4 WIRE NON-GROUNDING								
7251DF	20	3øY, 120/208	Plug, Yellow	.365"-.775"	18-20P	▪	▪	
8302AN	60	3øY, 120/208	Angled Plug, Yellow		18-60P	▪		

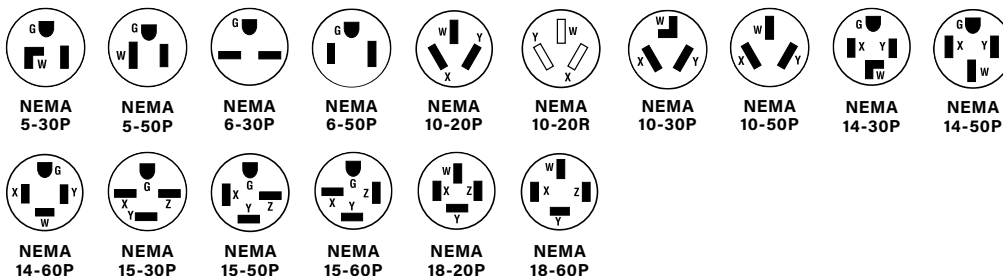

All devices listed on this page conform to NEMA WD-1 and WD-6.