


COMMERCIAL GRADE RECEPTACLES

Hard Use Specification Grade Tamper-Resistant Receptacles 15 & 20A, 125V

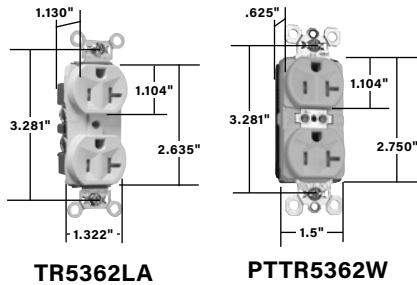

TR5362LA

PTTR5362W

Features

- Dual mechanical shutter system to help prevent insertion of foreign objects.
- Auto-ground clip assures positive ground.
- Easily accessed break-off line-contact connecting tab for fast and easy split-circuit wiring.
- Backed-out tri-drive brass terminal screws for faster installation. Internal screw-pressure-plate back and side wire capability. Two back wire holes for additional wiring flexibility.
- Corrosion-resistant plated steel strap is locked in to face and back body to resist pulling away from the face/body assembly.
- .032 inch thick brass triple-wipe power contacts.

- Two drive screws anchor steel strap to back body and face where abrupt removal torque is greatest.

PlugTail® Features Only

- .036 inch thick, brass, triple-wipe power contacts for lasting retention.
- Plated steel wrap-around strap design for maximum durability and corrosion resistance.
- No exposed terminals create a finger safe application before, during, and after installation.
- Built-in connector features large brass terminal blades to ensure consistent, reliable electrical connections.
- Crimped and welded contacts.

- Ultrasonically welded polycarbonate connector housing secures terminations and conductors in a UL Listed, finger safe housing.
- Large brass contacts snugly terminate on device blade terminals.
- Pre-stripped connector leads fasten to conductors, easier than standard pigtails.
- Auto-ground clip assures positive ground.
- **PlugTail devices** install up to 5 times faster than traditional.

CATALOG NUMBER	PLUGTAIL CATALOG NUMBER	RATING		COLOR	NEMA CONFIG. NO.	3rd PARTY COMPLIANCE	
		A.	V.			 UL498	FSUL WC596
TAMPER-RESISTANT HARD USE DUPLEX RECEPTACLES							
TR5262I	PTTR5262I	15	125	Ivory	5-15R	•	•
TR5262W	PTTR5262W	15	125	White	5-15R	•	•
TR5262	PTTR5262	15	125	Brown	5-15R	•	•
TR5262GRY	PTTR5262GRY	15	125	Gray	5-15R	•	•
TR5262BK	PTTR5262RED	15	125	Black	5-15R	•	•
TR5262RED		15	125	Red	5-15R	•	•
TR5262BL		15	125	Blue	5-15R	•	•
TR5262LA	PTTR5262LA	15	125	Light Almond	5-15R	•	•
TR5362I	PTTR5362I	20	125	Ivory	5-20R	•	•
TR5362W	PTTR5362W	20	125	White	5-20R	•	•
TR5362	PTTR5362	20	125	Brown	5-20R	•	•
TR5362GRY	PTTR5362GRY	20	125	Gray	5-20R	•	•
TR5362BK	PTTR5362BK	20	125	Black	5-20R	•	•
TR5362RED	PTTR5362LA	20	125	Red	5-20R	•	•
TR5362BL		20	125	Blue	5-20R	•	•
TR5362LA		20	125	Light Almond	5-20R	•	•

2 Pole, 3 Wire



NEMA 5-15R



NEMA 5-20R

For Bulk Packaging Solutions consult factory.