


COMMERCIAL GRADE RECEPTACLES

Hard Use Specification Grade Plug Load Controllable Receptacles 15 & 20A, 125V

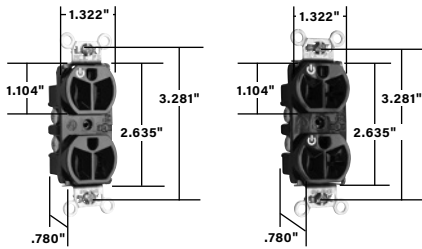

5262CHBK


5362CDBK

Features

- Pad-printed ink on face of receptacle for long-lasting identification and code compliance.
- **CH Version Only:** Split circuit tab broken at the factory, allowing half of the receptacle to be controlled.
- Controlled receptacle marking is NEMA-approved and compliant with 2017 NEC*.
- Can be wired to sensors, timers, or other control signals to control plug loads.
- .032 inch thick, brass, triple-wipe power contacts for lasting retention.
- Two drive screws anchor strap to back body and face where abrupt removal torque is strongest.
- Corrosion-resistant, plated steel strap locked into face and back body to resist pulling away from face/body assembly.
- Auto-ground eliminates the necessity to terminate grounding conductor in device.
- Easily accessed break-off, line-contact connecting tab for fast, easy split-circuit wiring.
- Tri-drive steel terminal screws. Internal screw-pressure-plate back and side wire capability. Two backwire holes for more wiring flexibility.

CATALOG NUMBER	TAMPER- RESISTANT CATALOG NUMBER	RATING		COLOR	NEMA CONFIG. NO.	3rd PARTY COMPLIANCE	
		A.	V.				FSUL WC596
HALF-CONTROLLED DUPLEX RECEPTACLES BACK & SIDE WIRE							
5262CHI	TR5262CHI	15	125	Ivory	5-15R	•	•
5262CHW	TR5262CHW	15	125	White	5-15R	•	•
5262CH	TR5262CHGRY	15	125	Brown	5-15R	•	•
5262CHGRY		15	125	Gray	5-15R	•	•
5262CHBK		15	125	Black	5-15R	•	•
5262CHLA		15	125	Light Almond	5-15R	•	•
5262CHBL	TR5262CHBL	15	125	Blue	5-15R	•	•
5262CHGN		15	125	Green	5-15R	•	•
5362CHI	TR5362CHI	20	125	Ivory	5-20R	•	•
5362CHW	TR5362CHW	20	125	White	5-20R	•	•
5362CH	TR5362CH	20	125	Brown	5-20R	•	•
5362CHGRY	TR5362CHGRY	20	125	Gray	5-20R	•	•
5362CHBK	TR5362CHBK	20	125	Black	5-20R	•	•
5362CHLA	TR5362CHLA	20	125	Light Almond	5-20R	•	•
5362CHBL	TR5362CHBL	20	125	Blue	5-20R	•	•
5362CHGN		20	125	Green	5-20R	•	•
DUAL-CONTROLLED DUPLEX RECEPTACLES BACK & SIDE WIRE							
5262CDI	TR5262CDI	15	125	Ivory	5-15R	•	•
5262CDW	TR5262CDW	15	125	White	5-15R	•	•
5262CD	TR5262CD	15	125	Brown	5-15R	•	•
5262CDGRY	TR5262CDGRY	15	125	Gray	5-15R	•	•
5262CDBK	TR5262CDLA	15	125	Black	5-15R	•	•
5262CDLA		15	125	Light Almond	5-15R	•	•
5262CDBL		15	125	Blue	5-15R	•	•
5262CDGN		15	125	Green	5-15R	•	•
5362CDI	TR5362CDI	20	125	Ivory	5-20R	•	•
5362CDW	TR5362CDW	20	125	White	5-20R	•	•
5362CD	TR5362CD	20	125	Brown	5-20R	•	•
5362CDGRY	TR5362CDGRY	20	125	Gray	5-20R	•	•
5362CDBK	TR5362CDBK	20	125	Black	5-20R	•	•
5362CDLA	TR5362CDLA	20	125	Light Almond	5-20R	•	•
5362CDBL	TR5362CDBL	20	125	Blue	5-20R	•	•
5362CDGN		20	125	Green	5-20R	•	•

2 Pole, 3 Wire



For Bulk Packaging Solutions consult factory.