

# COMMERCIAL GRADE RECEPTACLES


## Heavy-Duty Specification Grade Decorator Receptacles 15 & 20A, 125 & 250V

### Features

- Corrosion-resistant, plated steel strap locked into assembly to prohibit strap from bending away from body.
- One-piece, brass, triple-wipe power contacts for lasting retention.
- Heavy-duty compact design for easier installation and long lasting performance.
- Easily accessed break-off, line-contact connecting tab for fast, easy split-circuit wiring.
- Impact-resistant nylon face.
- Terminal compartments isolated from each other for positive conductor containment.
- Side and internal screw-pressure-plate back wire accepts #14 – #10 AWG solid or stranded wire.
- All devices fit standard Decorator-style wall plate.
- Tri-drive terminal and mounting screws.
- Auto-ground clip assures positive ground.


### PlugTail® Features Only

- .036 inch thick, brass, triple-wipe power contacts for lasting retention.
- Plated steel wrap-around strap design for maximum durability and corrosion resistance.
- No exposed terminals create a finger safe application before, during, and after installation.
- Built-in connector features large brass terminal blades to ensure consistent, reliable electrical connections.
- Crimped and welded contacts.
- Ultrasonically welded polycarbonate connector housing secures terminations and conductors in a UL Listed, finger safe housing.
- Large brass contacts snugly terminate on device blade terminals.
- Pre-stripped connector leads fasten to conductors, easier than standard pigtails.
- Auto-ground clip assures positive ground.
- PlugTail devices** install up to 5 times faster than traditional.

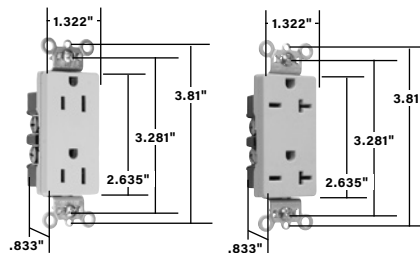

26252I

26852I

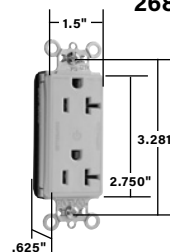

PT26352I

### 2 Pole, 3 Wire



NEMA 5-15R



NEMA 5-20R



NEMA 6-15R



NEMA 6-20R

CATALOG NUMBER	PLUGTAIL CATALOG NUMBER	RATING		COLOR	NEMA CONFIG. NO.	3rd PARTY COMPLIANCE	
		A.	V.			 cULus	FSUL WC596
DECORATOR RECEPTACLES							
26252I	PT26252W	15	125	Ivory	5-15R	•	•
26252W		15	125	White	5-15R	•	•
26252		15	125	Brown	5-15R	•	•
26252GRY		15	125	Gray	5-15R	•	•
26252BK		15	125	Black	5-15R	•	•
26252RED		15	125	Red	5-15R	•	•
26252LA		15	125	Light Almond	5-15R	•	•
26352I	PT26352I	20	125	Ivory	5-20R	•	•
26352W		20	125	White	5-20R	•	•
26352		20	125	Brown	5-20R	•	•
26352GRY		20	125	Gray	5-20R	•	•
26352BK		20	125	Black	5-20R	•	•
26352RED		20	125	Red	5-20R	•	•
26352BL		20	125	Blue	5-20R	•	•
26352LA	PT26352LA	20	125	Light Almond	5-20R	•	•
26652I		15	250	Ivory	6-15R	•	•
26652W		15	250	White	6-15R	•	•
26652BK		15	250	Black	6-15R	•	•
26852I		20	250	Ivory	6-20R	•	•
26852W		20	250	White	6-20R	•	•
26852		20	250	Brown	6-20R	•	•
26852BK		20	250	Black	6-20R	•	•
26852RED		20	250	Red	6-20R	•	•
26852LA		20	250	Light Almond	6-20R	•	•

For Bulk Packaging Solutions consult factory.