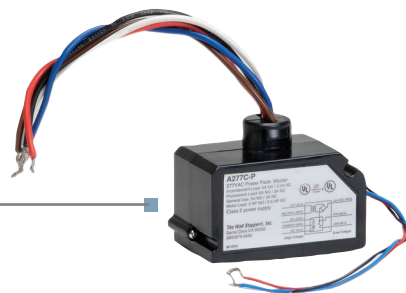


FORM C AND 2 RELAY POWER PACKS

| A120/277C-P & C120/277E-P

120 & 277V versions

All models
Plenum RatedForm C models
UL rated with
snap-in installation

Secondary voltage of 24 VDC

2 Relay power pack housed
in 4" metal junction box

Description

WattStopper has several power packs and power supplies that fill the needs of a variety of special applications. These products help to make lighting control installations more cost efficient and flexible.

Form C Power Packs

The Form C power packs contain a single pole, double-throw isolated relay with a normally open and normally closed output. These power packs can be used with a standard occupancy sensor to interface with HVAC or other systems. Special attention needs to be made to the load ratings as they vary and are significantly lower than standard power packs.


2 Relay Power Packs

The WattStopper C-Series power packs contain 2 isolated relays. These power packs can be used where 2 circuits need to be controlled at the same point. They provide a convenient alternative to using 2 power packs thus reducing installation time and costs. They are also useful where installation space is limited.

Specifications and Wiring


Form C Power Packs

- Up to 100 mA of 24 VDC power before relay is connected; 64 mA after relay is connected
- Secondary voltage of 24 VDC
- UL rated 94V-0 plastic enclosure with snap-in installation

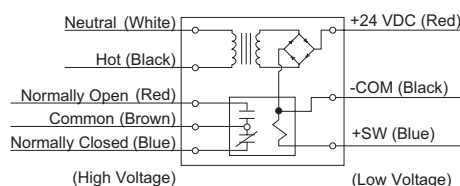

2 Relay Power Packs

- Up to 150 mA of 24 VDC power before relays are connected; 114 mA after single relay is connected, 78 mA when both relays are connected
- Secondary voltage of 24 VDC
- Housed in 4" metal junction box

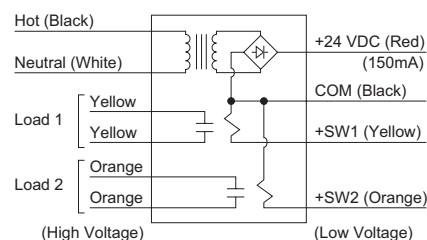

Ordering Information

Catalog #	Description	Input Voltage	Ballast (A)	Incan (A)	Motor (HP)	Output
<input type="checkbox"/> A120C-P	Form C Power Pack	120VAC, 60Hz	8NO/5NC	5NO/3NC	1NO/.25NC	24 VDC; 100 mA*
<input type="checkbox"/> A277C-P	Form C Power Pack	277VAC, 60Hz	6NO/3NC	5NO/2.5NC	2NO/.5NC	24 VDC; 100 mA*
<input type="checkbox"/> C120E-P	2 Relay Power Pack	120VAC, 60Hz	20**	13**	1**	24 VDC; 150 mA*
<input type="checkbox"/> C277E-P	2 Relay Power Pack	277VAC, 60Hz	20**	-	-	24 VDC; 150 mA*

*Contains an isolated relay with normally open (NO) and normally closed (NC) contacts.

**Rating per relay.

Output shown is before relay connection

PROJECT		LOCATION/ TYPE	
---------	--	-------------------	--