


1500 SERIES™ OVERFLOOR RACEWAY

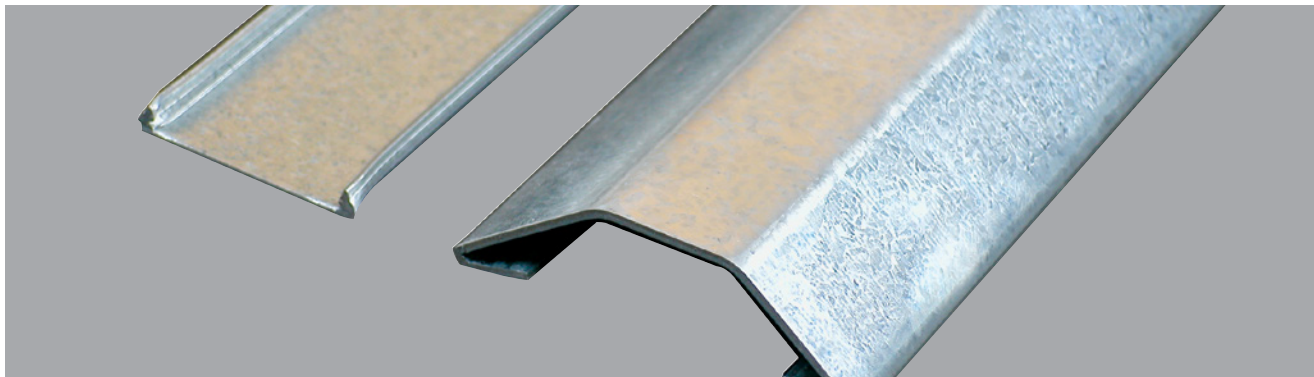


Wiremold® 1500 Series™ Steel Raceway provides permanent protection for overfloor cabling in high traffic areas.

CODE REFERENCE

cULus Listed Underfloor Raceways:
File E4376 Guide RJBT.

Fittings: File E41751 Guide RJPR.
Meets Article 386 of NEC.
Meets Section 12-1600 of CEC.

1500 Series Raceway System Layout

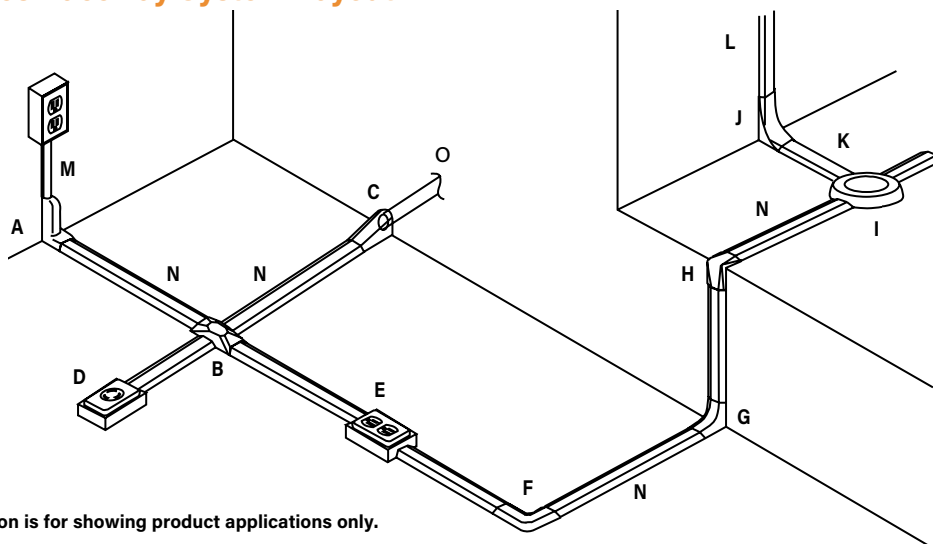

NOTE: Illustration is for showing product applications only.

KEY

A. V1517B Adapter Fitting
B. 1528 Utility Box
C. 1585 Combination Connector
D. 1546A Single Receptacle Box
E. 1546B Duplex Receptacle Box
F. 1511 90° Flat Elbow

G. 1517 Internal Elbow
H. 1518 External Elbow
I. 2642D Junction Box
J. 2686FO Transition Feed Fitting
K. 2600 Series Overfloor Steel Raceway

L. 2400 Series Raceway
M. V500 500/700 Series Raceway
N. 1500 Raceway Base & Cover
O. 1/2" Conduit or Armored Cable

COLOR OPTIONS



1500 Series™ Raceway components are available in galvanized steel unless otherwise indicated in the part number description.

1500 SERIES™ OVERFLOOR RACEWAY

Ordering Information

1500 Series Raceway Wire Fill Capacities for Communications

	CABLE/WIRE SIZE	O.D. (Approx. dia.)		40% FILL
		Inches	(mm)	
UNSHIELDED TWISTED PAIR	4-pair, 24 AWG, Cat 3	0.190	(4.8)	3
	4-pair, 24 AWG, Cat 5e	0.210	(5.3)	2
	4-pair, 24 AWG, Cat 6	0.250	(6.3)	1
	4-pair, 24 AWG, Cat 6a*	0.354	(9.0)	0
	25-pair, 24 AWG	0.410	(10.4)	0
COAXIAL	RG6/U	0.270	(6.9)	1
FIBER	ZipCord	0.118 x 0.236	(3 x 6)	3
	Round 4 Strand Fiber	0.187	(4.8)	3
	Round 6 Strand Fiber	0.256	(6.5)	1


1500 Series Raceway Wire Fill Capacities for Power

WIRE SIZE THHN/THWN	O.D. (Approx. dia.)		NO. OF CONDUCTORS 40% FILL
	Inches	(mm)	
14 AWG	0.111	(2.8)	9
12 AWG	0.130	(3.3)	6
10 AWG	0.164	(4.2)	4

NOTE: For additional information, refer to the Technical Section.


* Category 6 augmented (6a) cable for 10 gigabit ethernet - max allowed cable diameter per addenda No. 11 ANSI TIA/EIA 568-B.2.

1500-10 Raceway Base & Cover




.040" (1.0mm) galvanized steel. Packed ten 10' (3m) lengths per carton. Base has 9/32" (7.1mm) diameter mounting holes on centers of approximately 8" (203mm).

1511 90° Flat Elbow




For right angle turns on the same surface.

656 Cover Removal Tool




For removing cover of 1500 and 2600 Series Overfloor Raceways.

1517 Internal Elbow




For internal 90° corners.

1500WC Wire Clip




For holding conductors in place. Not UL Listed.

1502 Fiber Bushing




Protects wires from abrasion. Slips into open end of 1500 Series Raceway where it enters a fitting.

V1517B Adapter Fitting



To feed to or from 500 or 700 Series Raceway on wall to 1500 Series Raceway on floor. Ivory finish.

1518 External Elbow



For external 90° corners.

1504 Strap



Two-hole strap. Use to fasten 1500 Series Raceway to surfaces at any point desired.