
# PLUGMOLD<sup>®</sup> 2000 SERIES<sup>™</sup>



Two-piece, low profile multiple outlet raceway. Low profile requires minimal space.

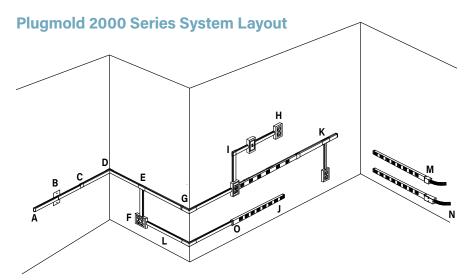

NOTE: Illustration is for showing product applications only.

### **CODE REFERENCE**

cULus Listed Base & Blank Cover: File E4376 Guide RJBT.

Multi-Outlet Assemblies: File E15191 Guide PVGT.

Fittings: File E41751 Guide RJPR.

Base & Blank Cover& Plugmold Series with Snapicoil Harness: Meets Article 386 of NEC. Meets Section 12-3032 of CEC.

Plugmold Wired Sections: Meets Article 380 of NEC. Meets Section 12-3032 of CEC.

### **KEY**

- A. V2010B Blank End Fitting
- B. V2051H Flush Plate Adapter
- C. V2006 Cover Clip
- D. 2017TC Internal Corner Coupling
- E. V2015 Tee Fitting
- F. V2048-2 Two-Gang Device Box
- G. V2018C External Elbow Cover
- H. V2048 Single-Gang Device Box
- I. V2011 90° Flat Elbow
- J. V20GB506 Plugmold Strip
- K. V2089 Side-Reducing Fitting
- L. V2000BC 2000 Series Raceway
- M. V2010A2 Entrance End Fitting
- N. V2010A3 Entrance End Fitting
- 0. V2089E End-Reducing Connector

### **COLOR OPTIONS**



Plugmold<sup>\*</sup> 2000 Series<sup>®</sup> Part Numbers with a "V" prefix have an ivory finish. Part Numbers with a "G" prefix have a gray finish. Part Numbers with a "S" prefix have a stainless finish. Part Numbers with a "WH" prefix have a white finish. Part Numbers with a "BK" prefix have a black finish. Painted units have matching color receptacles. Stainless units have black receptacles and aluminum units have gray receptacles. Isolated ground (IG) units have orange receptacles.

Custom color options for housing are also available. Consult the factory for more information.

# PLUGMOLD<sup>®</sup> 2000 SERIES<sup>™</sup>

### **Plugmold 2000 Series Wire Fill Capacities for Power**

			NUMBER OF CONDUCTORS			
WIRE SIZE	0	.D.	WITHOUT	WITH PLUGMOLD		
THHN/THWN	Inches	[mm]	DEVICES	RECEPTACLES		
12 AWG	0.111	[2.8]	7	5		
14 AWG	0.130	[3.3]	7	5		

### **Plugmold 2000 Series Product Configuration Matrix**

		LENGTH Feet [mm]			OUTLETS (15A 125V NEMA 5-15R) CENTER DISTANCE OUTLET			
CAT. NO	FINISH			WIRING CONFIG.	Inches	[mm]	QTY.	
20GB206TR	S	2	[610mm]	GB	6	[152mm]	4 Single	
20GB306TR	V, G, BK, WH, S	3	[915mm]	GB	6	[152mm]	6 Single	
20GB506TR	V, G, BK, WH, S	5	[1.5m]	GB	6	[152mm]	10 Single	
20GB512TR	V, G, BK, WH, S	5	[1.5m]	GB	12	[305mm]	5 Single	
20GBA512TR	V, G	5	[1.5m]	GBA	12	[305mm]	5 Single	
20GB606TR	V, G, BK, WH, S	6	[1.8m]	GB	6	[152mm]	12 Single	
20GB609TR	V, G	6	[1.8m]	GB	9	[229mm]	8 Single	
20GB612TR	V, G, BK, WH, S	6	[1.8m]	GB	12	[305mm]	6 Single	
20GB618TR	V, G	6	[1.8m]	GB	18	[457mm]	4 Single	
20GBA609TR	V, G	6	[1.8m]	GBA	9	[229mm]	8 Single	
20GBA612TR	V, G	6	[1.8m]	GBA	12	[305mm]	6 Single	
20GBA618TR	V, G	6	[1.8m]	GBA	18	[457mm]	4 Single	

NOTE: Ivory, gray, white, and black Plugmold Series in GB and GBA wiring have matching color receptacles. Stainless steel Plugmold Series has black receptacles.

### Plugmold 2000 Series 48' and 50' (14.6m & 15.2m) Lengths - Ivory, Gray Finish

	LENGTH		WIRING	OUTLETS (15A 125V NEMA 5-15R) CENTER DISTANCE			2000B AND 2000C HOLE CUT COVER LENGTH		
CAT. NO	Feet	[mm]	CONFIG.	Inches	[mm]	QTY.	QTY.	Feet	[mm]
20GB12	48	[14.6]	GB	12	[305]	48 Single	8	6	[1.830]
20GB18	48	[14.6]	GB	18	[457]	32 Single	8	6	[1.830]
20GB30	50	[15.2]	GB	30	[760]	20 Single	10	5	[1.525]
20GBA12	48	[14.6]	GBA	12	[305]	48 Single	8	6	[1.830]

### **Plugmold 2000 Series Wiring Configuration**

### 


3-wire #12 THHN solid (1 hot, 1 neutral, and 1 ground), 1-circuit; has insulated grounding conductor.

## 

#### **GBA SERIES:**

4-wire #12 THHN solid (2 hot, 1 neutral, and 1 ground), 2-circuits; outlets wired alternately; has insulated grounding conductor.

### WITH SNAPICOIL HARNESS





3-wire #12 THHN solid (1 hot, 1 neutral, and 1 ground), 1-circuit; has insulated grounding conductor.

#### **GBA SERIES:**

4-wire #12 THHN solid (2 hot, 1 neutral, and 1 ground), 2-circuits; outlets wired alternately; has insulated grounding conductor.

## **L**legrand

V20GB12 V20GB306

V20GB612 NOTE:

> Snapicoil Reels on custom order. Snapicoil Harness is available on reels if lengths greater than 50' are needed, or if multiple lengths are required for production-type jobs. The maximum length per reel is 240' for Snapicoil Harness with outlets 12" and 18" on centers; 500' with outlets 30" on center. Packaging includes the necessary number of lengths of base, holecut cover, wire clips, and couplings for complete installation. Price and delivery information should be obtained prior to specifying or ordering.

Receptacles are made from high impact thermoplastic. Plugmold 2000 Series is supplied with two (2) 2010B Blank End Fittings and (1) 2001 Base Coupling.