
500° & 700° SERIES RACEWAY

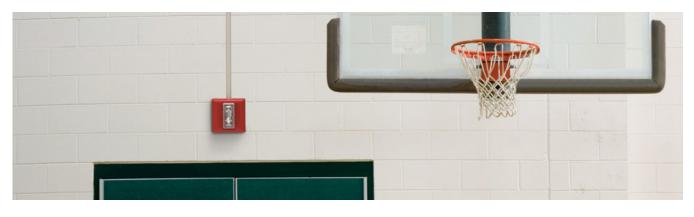

For over 100 years, one-piece, single-channel raceway has been the ideal choice for basic power or communication/low voltage installations. It's easy to install and features a low profile appearance that blends with any decor.

Download this product's PEP ecopasport.

14040 and is in alignment with EN 15804.

www.legrand.us/resources-and-downloads.


This declaration conforms with ISO 14025 and

environmental product declaration at

CODE REFERENCE

cULus Listed Raceway: File E4376 Guide RJBT.

Fittinas: File E41751 Guide RJPR. Meets Article 386 of NEC. Meets Section 12-1600 of CEC.

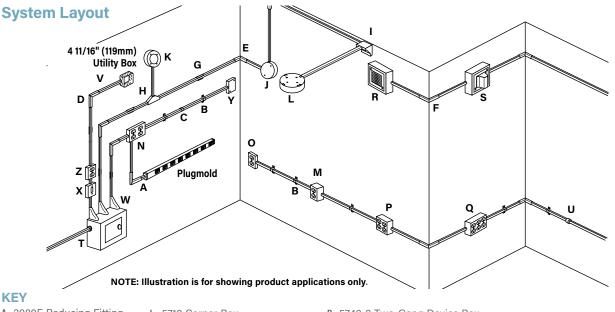

KEY

A. 2089E Reducing Fitting

PEP

eco

PASS

PORT®

- B. 504 Mounting Strap
- **C.** 506 Cover Clip
- D. 511 Flat Elbow
- E. 517 Internal Elbow
- F. 518 External Elbow
- G. 5703 Supporting Clip
- H. 5715 Tee

- I. 5719 Corner Box
- J. 5734A Utility Box
- K. 5738 Fixture Box Solid Base
- L. V5739 Fixture Box Solid Base
- M. 5744 Extra Deep Device Box
- N. 5747-2 Two-Gang Shallow
- Device Box
- 0. 5748S Shallow Device Box
- P. 5748-2 Two-Gang Device Box
- Q. 5748-3 Three-Gang Device Box
- R. 5752 Alarm Device Box
- S. 5753 Extra Deep Alarm
- Device Box
- T. 5781 Box Connector
- U. 5782 1/2" Trade Size
 - Conduit Connector
- V. 5785 Combination Connector
- W. V5786 Adjustable Offset Connector
- X. 5724O Single Pole Switch and Box
- Y. 57242 Utility Box
- Z. 57243G Duplex Receptacle and Box

COLOR OPTIONS

500° and 700° Series Raceway Part Numbers with a "V" prefix have an ivory finish. Part Numbers with a "WH" suffix have a white finish. Some Device Boxes used in safety applications are also available with a red painted finish.

Custom color options are also available. Consult the factory for more information.

463

500° & 700° SERIES RACEWAY

700 Series Wire Fill Capacities For Communications

		O.D. (APPROX. DIA.)		40%
	CABLE/WIRE SIZE	Inches	(mm)	FILL
UNSHIELDED TWISTED PAIR	4-pair, 24 AWG, Cat 3	0.190	(4.8)	3
	4-pair, 24 AWG, Cat 5e	0.210	(5.3)	3
	4-pair, 24 AWG, Cat 6	0.250	(6.3)	2
	4-pair, 24 AWG, Cat 6a*	0.354	(9.0)	1
	25-pair, 24 AWG	0.410	(10.4)	0
COAXIAL	RG6/U	0.270	(6.9)	1
FIBER	ZipCord	0.118 x 0.236	(3 x 6)	3
	Round 4 Strand Fiber	0.187	(4.8)	3
	Round 6 Strand Fiber	0.256	(6.5)	2

700 Series Raceways Ordering Information

One-Piece Raceway



PART NUMBERS: V700 (Ivory) 700WH (White)

Case hard steel replacement blades for 607 Raceway Cutter.

.040" (1.0mm) steel. Ivory finish. Available in 10' (3m) lengths, 100' (31m) per carton. One (1) 5701 Coupling furnished with each length.

607 700 Series Raceway Cutter

607K Replacement Blades



Single action portable cutter. Fast and easy square cuts.

700 Series Wire Fill Capacities for Power

WIRE SIZE	O.D.		NO. OF CONDUCTORS	
THHN/THWN	Inches	(mm)	40% FILL	
14 AWG	0.111	(2.8)	10	
12 AWG	0.130	(3.3)	7	
10 AWG	0.164	(4.2)	4	

NOTE: For additional information, refer to the Technical Section. * Category 6 augmented (6a) cable for 10 gigabit ethernet - max allowed cable diameter per addenda No. 11 ANSI TIA/EIA 568-B.2.

702 Bushing



Protects wires from abrasion. Slips into open end of 700 Series Raceway.

Mounting Strap



PART NUMBERS: V704 (Ivory) 704WH (White)

(One- or Two-Hole) Converts to onehole by breaking off at score. Lanced tab holds strap in place while fastening to surface.

Connection Cover

(19.1mm)



PART NUMBERS: V706 (Ivory) 706WH (White)

Covers seam where two lengths of 700 Series Raceway come together.

465

NOTE: Use #8 flathead screws with all fittings requiring screws except V704. With V704, use #8 panhead screws.