


OMNIBOX™ SERIES FLOOR BOXES


Omnibox Series Solid Brass Floor Boxes Cover Plate Flanges Ordering Information

817B One-Gang Brass Combination Carpet and Tile Flange




Accepts Ortronics® MAB6TJ TracJack and MAB3S2 Series II adapters and Wiremold CM Series inserts, sold separately.

827B Two-Gang Brass Combination Carpet and Tile Flange




Accepts Ortronics® MAB6TJ TracJack and MAB3S2 Series II adapters and Wiremold CM Series inserts, sold separately.

837B Three-Gang Brass Combination Carpet and Tile Flange




Accepts Ortronics® MAB6TJ TracJack and MAB3S2 Series II adapters and Wiremold CM Series inserts, sold separately.

817C One-Gang Brass Carpet Flange




For use on 880S1, 880M1, 880CS1-1 and 880CM1-1 Floor Boxes.

827C Two-Gang Brass Carpet Flange




For use on 880S2, 880M2, 880CS2-1 and 880CM2-1 Floor Boxes.

837C Three-Gang Brass Carpet Flange




For use on 880S3, 880M3, 880CS32-1 and 880CM3-1 Floor Boxes.

817T One-Gang Brass Tile Flange




For use on 880S1, 880M1, 880CS1-1 and 880CM1-1 Floor Boxes.

827T Two-Gang Brass Tile Flange



For use on 880S2, 880M2, 880CS2-1 and 880CM2-1 Floor Boxes.


837T Three-Gang Brass Tile Flange



For use on 880S3, 880M3, 880CS3-1 and 880CM3-1 Floor Boxes.


Omnibox Series Metal Cover Plates Ordering Information

828R Brass Duplex Cover Plate



Flip lids. Can also be used with a 106 type communication adapter.

828GFITC Brass GFI Cover Plate



May be used with Activate and Ortronics® Connectivity Systems in conjunction with 817B, 827B and 837B Flanges.


NOTE: UL Listed for tile, terrazzo and carpet floors.

Brass covers and flanges are not interchangeable with aluminum or nonmetallic covers and flanges.
Nonmetallic covers are interchangeable with aluminum flanges.

880W SERIES™ FLOOR BOXES


880W Series Floor Boxes Solid Brass Cover Plate Flanges Ordering Information

817B One-Gang Brass Combination Carpet and Tile Flange




Accepts Ortronics® MAB6TJ TracJack and MAB3S2 Series II adapters and Wiremold CM Series inserts, sold separately.

817C One-Gang Brass Carpet Flange




For use on 880W1 Floor Boxes.

827B Two-Gang Brass Combination Carpet and Tile Flange




Accepts Ortronics® MAB6TJ TracJack and MAB3S2 Series II adapters and Wiremold CM Series inserts, sold separately.

827C Two-Gang Brass Carpet Flange




For use on 880W2 Floor Boxes.

837B Three-Gang Brass Combination Carpet and Tile Flange



Accepts Ortronics® MAB6TJ TracJack and MAB3S2 Series II adapters and Wiremold CM Series inserts, sold separately.


837C Three-Gang Brass Carpet Flange



For use on 880W3 Floor Boxes.


880W Series Floor Boxes Metal Cover Plates Ordering Information

828R Brass Duplex Cover Plate



Flip lids. Can also be used with a 106 type communication adapter.

828GFITC Brass GFI Cover Plate



May be used with Activate and Ortronics® Connectivity Systems in conjunction with 817B, 827B and 837B Flanges.

NOTE: UL Listed for wood constructed floors. Brass covers and flanges are not interchangeable with aluminum or nonmetallic covers and flanges. Nonmetallic covers are interchangeable with aluminum flanges.

FIRE CLASSIFIED FLOOR BOXES


OmniBox™ Series Floor Boxes

Standard Depth Steel OmniBox Floor Box Ordering Information (continued)

8803S-FC

Three-Gang Fire Classified Steel Floor Box

Adjustment range over deck of 2" (51mm) minimum to 5" (127mm) maximum. Three 1 1/4" (32mm) conduit feed openings. Inside Gang Capacity – 67.5 cubic inches. Outside Gang Capacity – 54 cubic inches each gang.

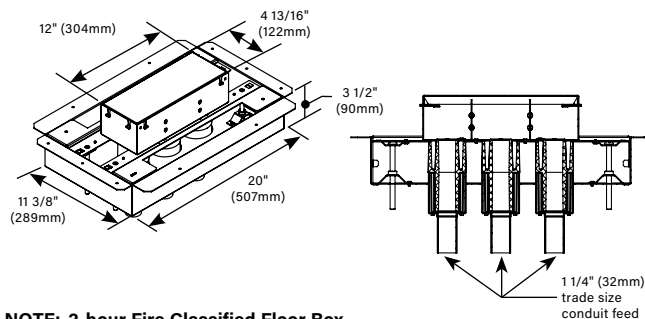

NOTE: 2-hour Fire Classified Floor Box


Floor Box spacing 2' on center and one for every 4 square feet in a span.

Four (4) #12 AWG Type THHN Power Conductors or 48 #23 AWG (6 Cat. 6) Tele Data Conductors per gang.

8803S-FC12

Three-Gang Fire Classified Steel Floor Box

Adjustment range over deck of 2" (51mm) minimum to 6 1/2" (165mm) maximum. One 1 1/4" (32mm) trade size conduit feed and two 2" (51mm) trade size conduit feed openings. Inside Gang Capacity – 67.5 cubic inches. Outside Gang Capacity – 54 cubic inches each gang.

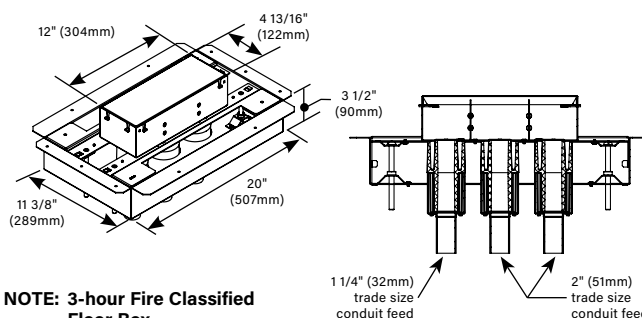


NOTE: 3-hour Fire Classified Floor Box

Floor Box spacing 2' on center and one for every 4 square feet in a span.

Four (4) #12 AWG Type THHN Power Conductors or 48 #23 AWG (6 Cat. 6) Tele Data Conductors per gang.


OmniBox Series Floor Boxes Solid Brass Cover Plate Flanges Ordering Information

817B One-Gang Brass Combination Carpet and Tile Flange




Accepts Ortronics® MAB6TJ TracJack and MAB3S2 Series II adapters and Wiremold CM Series inserts, sold separately.

817C One-Gang Brass Carpet Flange




For use on 880S1-FC and 880S1-FC2 Floor Boxes.

827B Two-Gang Brass Combination Carpet and Tile Flange




Accepts Ortronics® MAB6TJ TracJack and MAB3S2 Series II adapters and Wiremold CM Series inserts, sold separately.

827C Two-Gang Brass Carpet Flange




For use on 880S2-FC and 880S2-FC2 Floor Boxes.

837B Three-Gang Brass Combination Carpet and Tile Flange



Accepts Ortronics® MAB6TJ TracJack and MAB3S2 Series II adapters and Wiremold CM Series inserts, sold separately.

837C Three-Gang Brass Carpet Flange



For use on 880S3-FC and 880S3-FC2 Floor Boxes.

NOTE: UL Listed for terrazzo, polished concrete, wood, tile and carpet covered concrete floors.

Brass covers and flanges are not interchangeable with aluminum or nonmetallic covers and flanges. Nonmetallic covers are interchangeable with aluminum flanges.