

### 15A & 20A Devices

Leviton offers a large selection of 15 and 20 Amp devices including residential, commercial and industrial grade receptacles, plugs and connectors; snap-in devices; as well as flanged inlets and outlets.

#### Sample 15A & 20A Devices



## Traditional Receptacles

Leviton's comprehensive line of traditional receptacles includes devices rated for all residential applications in a variety of standard configurations and colors.


### Features and Benefits

- TR symbol on residential receptacles assures they meet the latest NEC requirements for tamper-resistant receptacles
- Ultrasonic welding, heavy-duty construction offers long, trouble-free service life

### 20 Amp

- Terminal Screw accepts up to #10 AWG copper

### T5320

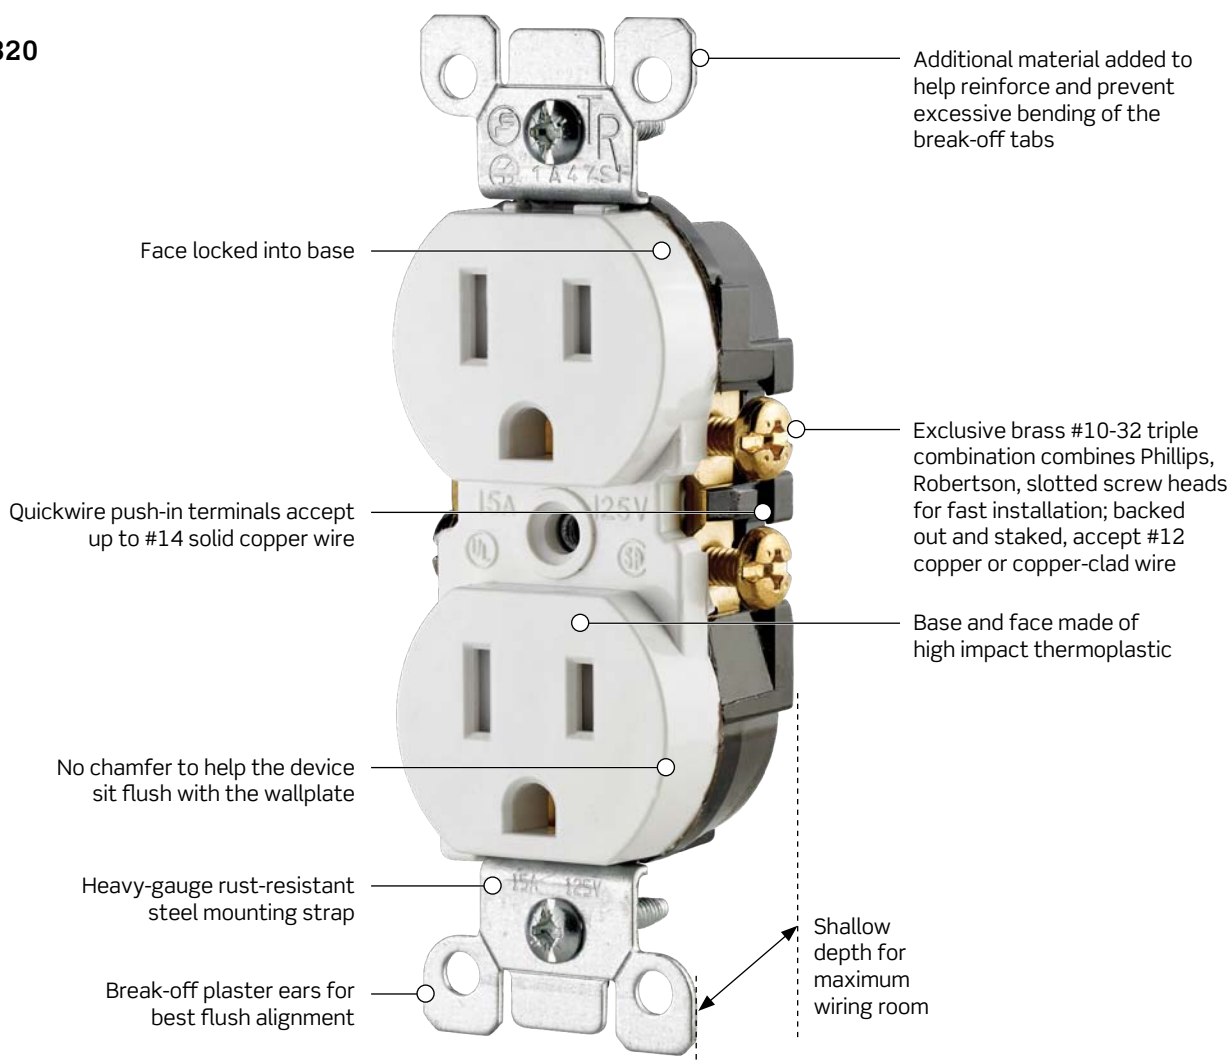

**Color Choices** Residential straight blade devices are offered in a wide range of colors. To order colors, add suffix to Cat. No.



White  
(-W)



Ivory  
(-I)



Light Almond  
(-T)



Gray  
(-G/-GY)



Black  
(-E)



Brown

Continued from previous page

## Side Wired

**Rating** 15A-125V

NEMA



5-15R

Description	Color	Cat. No.
Duplex, on 4" Cover	Brown	1228
Clock Hanger, Flush Mount with Square Recess with Ground Screw	White	688-W
	Ivory	688-I
	Light Almond	688-T
One-Gang Recessed Duplex Receptacle	White	689-W
	Ivory	689-I
	Black	689-E
	Light Almond	689-T
Two-Gang Recessed Duplex Receptacle w/Openings for 6 Quickport® Modules	White	690-W

**Rating** 15A-125V

NEMA



1-15R

Description	Color	Cat. No.
Duplex, Non-Grounded, Plastic Ears*	White	223-W
	Ivory	223-I
	Brown	223
Duplex, T-Slot, Non-Grounded (not UL listed; for replacement use only)*	Ivory	5000

CSA Certified except where indicated by \*



688-W



223-I

C  
Straight Blade Devices

## CO/ALR

These receptacles are specifically designed to work with aluminum conductors and are identified by a CO/ALR stamped on the device. The terminal screws are plated with the element indium which forms a gas-sealed connection with the aluminum wire, eliminating problems caused by oxidation.

## Side Wired

**Rating** 15A-125V

NEMA



5-15R

Description	Color	Cat. No.
CO/ALR Duplex, UL Listed for direct connection to #12 or #10 AWG aluminum conductors	White	12650-W
	Ivory	12650-I

**Note:** CO/ALR devices are for connection to #12 or #10 AWG Aluminum Conductors



12650-W



### Related Products

Leviton also offers superior quality recessed devices. **See pages P-28 in the Connected Home section for more information.**



### Wallplates

Find the right wallplate for any application. **See section S for Wallplates & Covers.**