


Decora® Receptacles

Leviton's comprehensive Decora® receptacle portfolio includes devices rated for all types of applications in a variety of standard configurations and colors.



Color Choices Decora® straight blade devices are offered in a wide range of colors. To order colors, add suffix to Cat. No.

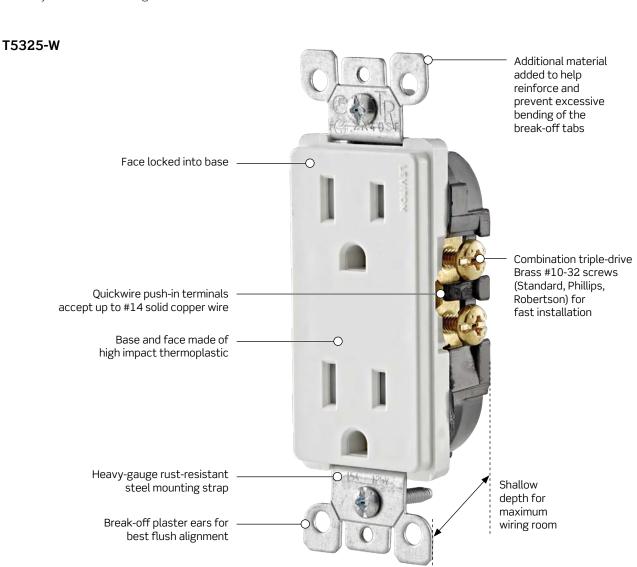











(-E)









Residential Grade Decora® Receptacles

Features and Benefits

Decora® Quickwire and Side Wired Receptacles

- Terminal screws accept up to #12 AWG copper or copper-clad wire
- Quickwire push-in terminals accept #14 AWG solid copper wire only
- Double-wipe power contacts for reliable conductivity and plug retention
- Heavy-gauge zinc-plated steel mounting strap
- Limited 2-year warranty

Weather-Resistant

 UV stabilized thermoplastic construction and extra corrosion protection to withstand the rigors of exposure to the elements

Tamper-Resistant Receptacles

- Additional material added to strap to help reinforce and prevent excessive bending of the break-off tabs
- Shutter mechanism inside the receptacle blocks access to the contacts unless a two-prong plug is inserted, helping ensure hairpins, keys, etc., will be locked out
- TR symbol on strap assures they meet the latest NEC requirements
- Ultrasonic welding, heavy-duty construction offers long, trouble-free service life

20A

- Terminal screw accepts up to #10 AWG Copper
- Side wired only

Rating		15A-125V	20A-125V
EMA			
		5-15R	5-20R
escription	Color	Cat. No.	Cat. No.
Duplex	White	5325-W	_
	Ivory	5325-I	_
	Light Almond	5325-T	_
	Gray	5325-GY	_
	Black	5325-E	_
	Brown	5325	_
uplex, Weather-Resistant,	White	W5325-W	_
mper-Resistant			
Duplex, Self-Grounding*	White	5325-SW	_
	lvory	5325-SI	_
	Light Almond	5325-ST	_
	Black	5325-SE	_
	Brown	5325-S	_
Duplex, Tamper-Resistant	White	T5325-W	_
	lvory	T5325-I	_
	Light Almond	T5325-T	_
	Gray	T5325-GY	_
	Black	T5325-E	_
	Brown	T5325	
plex, Tamper-Resistant,	White	T5325-SW	_
Self-Grounding*	Ivory	T5325-SI	_
	Light Almond	T5325-ST	
olex Tamper-Resistant,	White	_	T5825-W
f-Grounding*,	Ivory	_	T5825-I
No Quickwire	Light Almond	_	T5825-T
	Gray	_	T5825-GY
	Black	_	T5825-E
	Brown	_	T5825



5325-W



T5325-W



T5825-W

^{*}Self-grounding when installed in a properly grounded metal wallbox