


Industrial Grade Receptacles

Leviton's Industrial Grade Series receptacles withstand the rigors of the harshest environments, such as those found in factories, schools, and municipal buildings. These specification grade devices are the best choice where durability, safety and reliability are of utmost importance.

5362-W

Back-wiring clamps accept up to #10 solid or stranded copper wire

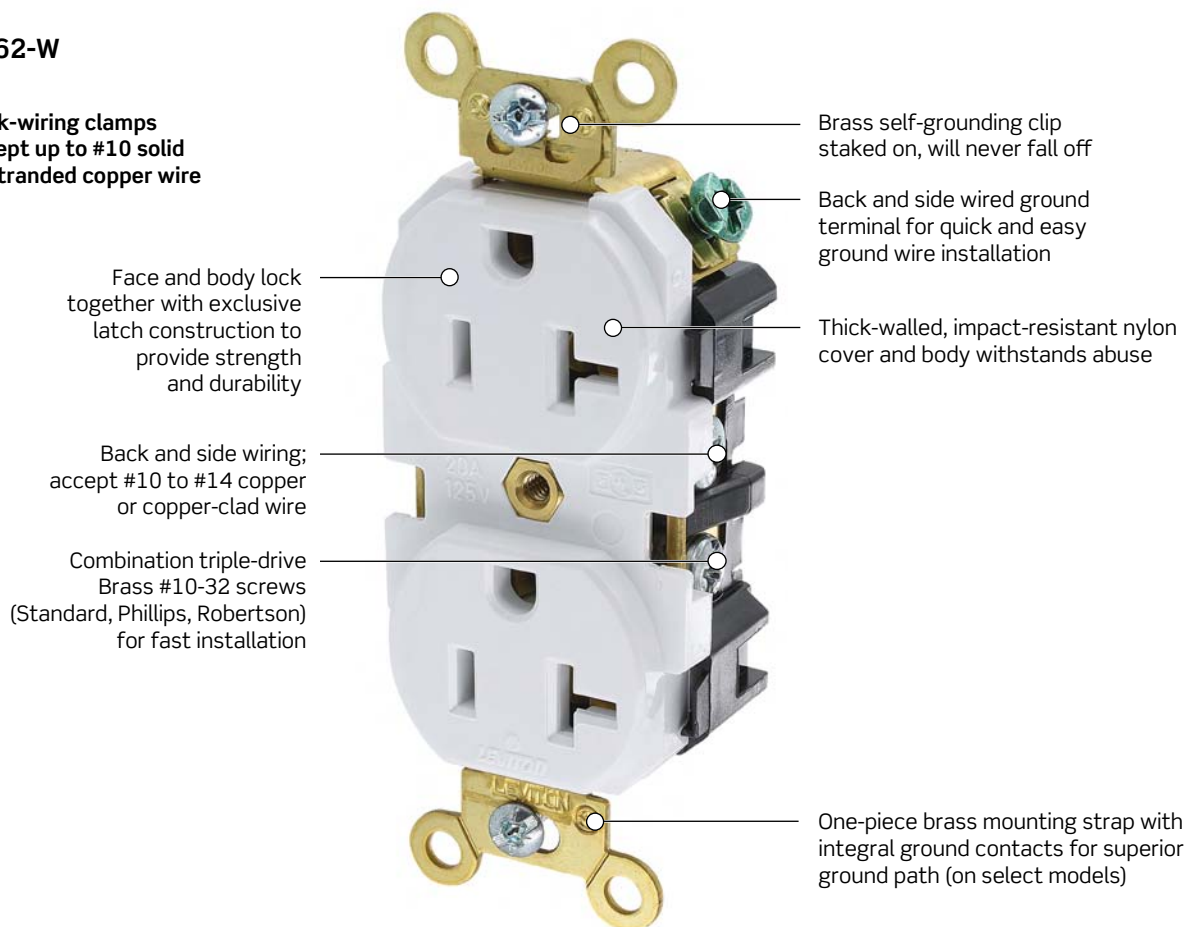

Features and Benefits

Heavy-Duty

- Impact-resistant thermoplastic nylon cover and body
- Smooth face does not collect dirt
- Four corner latches securely fasten face
- Large, triple-wipe, brass "T" contacts for superior contact and conductivity
- Back and side-wiring options
- Brass terminal screws to reduce conductor oxidation

- Break-off tabs for easy two-circuit conversion
- Apron barrier to prevent accidental contact between terminal screw heads and metal box
- Exclusive V-shaped, serrated back-wiring clamps for superior contact and conductivity
- Wire lead receptacles for fast and easy installation
- Fed Spec, W-C-596, UL Listed and CSA
- Backed by a limited 10-year warranty

*See page C-28 to C-40 for Decora® and Decora Plus™ devices

Continued on next page

Color Choices Industrial straight blade devices are offered in a wide range of colors. To order colors, add suffix to Cat. No.



White
(-W)



Ivory
(-I)



Light Almond
(-T)



Gray
(-G/-GY)



Black
(-E)



Brown



Red
(-R)



Yellow
(-Y)



Blue
(-B)



Orange
(-O)

Continued from previous page

Industrial Spec Grade, Back and Side Wired/Wire Lead Receptacles

Back and Side Wired, Self-Grounding    FED SPEC					
Rating		15A-125V	15A-250V	20A-125V	20A-250V
NEMA					
		5-15R	6-15R	5-20R	6-20R
Description	Color	Cat. No.	Cat. No.	Cat. No.	Cat. No.
Heavy-Duty, Single, Tamper-Resistant	White	—	T5661-W	—	T5461-W
	Ivory	—	T5661-I	—	T5461-I
	Light Almond	—	T5661-T	—	T5461-T
	Gray	—	T5661-GY	—	T5461-GY
	Black	—	T5661-E	—	T5461-E
	Brown	—	T5661	—	T5461
Heavy-Duty, Single, Tamper and Weather-Resistant	White	—	W5661-TOW	—	W5461-TOW
	Ivory	—	W5661-TOI	—	W5461-TOI
	Light Almond	—	W5661-TOT	—	W5461-TOT
	Gray	—	W5661-TGY	—	W5461-TGY
	Black	—	W5661-TOE	—	W5461-TOE
	Brown	—	W5661-T00	—	W5461-T00
	Yellow	—	W5661-T0Y	—	W5461-T0Y
Heavy-Duty, Single, Corrosion-Resistant	Yellow	5261-CR	5661-CR	5361-CR	5461-CR

Back and Side Wired, Self-Grounding   FED SPEC					
Description	Color	Cat. No.	Cat. No.	Cat. No.	Cat. No.
Single, Clock Hanger	Stainless Steel	5261-CH	—	5361-CH	—

Back and Side Wired, Isolated Ground    FED SPEC					
Description	Color	Cat. No.	Cat. No.	Cat. No.	Cat. No.
Heavy-Duty, Duplex	White	5262-IGW	—	5362-IGW	—
	Ivory	5262-IGI	—	5362-IGI	—
	Light Almond	—	—	5362-IGT	—
	Gray	5262-IGG	—	5362-IGG	—
	Black	5262-IGE	—	5362-IGE	—
	Brown	5262-IGB	—	5362-IGB	—
	Red	5262-IGR	—	5362-IGR	—
	Blue	—	—	5362-BIG	—
	Orange	5262-IG	5662-IG	5362-IG	5462-IG
Heavy-Duty, Duplex, Tamper-Resistant	White	T5262-IGW	—	T5362-IGW	—
	Ivory	T5262-IGI	—	T5362-IGI	—
	Gray	T5262-IGG	—	T5362-IGG	—
	Brown	T5262-IGB	—	T5362-IGB	—
	Red	T5262-IGR	—	T5362-IGR	—
	Orange	T5262-IG	—	T5362-IG	—

Back and Side Wired, Isolated Ground    FED SPEC					
Description	Color	Cat. No.	Cat. No.	Cat. No.	Cat. No.
Heavy-Duty, Single	Orange	5261-IG	—	5361-IG	—
Heavy-Duty, Single, Pre-Wired Ground Lead	Orange	—	5661-IG	—	5461-IG



5362-IG



5262-IG



T5262-IGW

Continued on next page