


Catalog Number Logic

How our product catalog numbers are derived

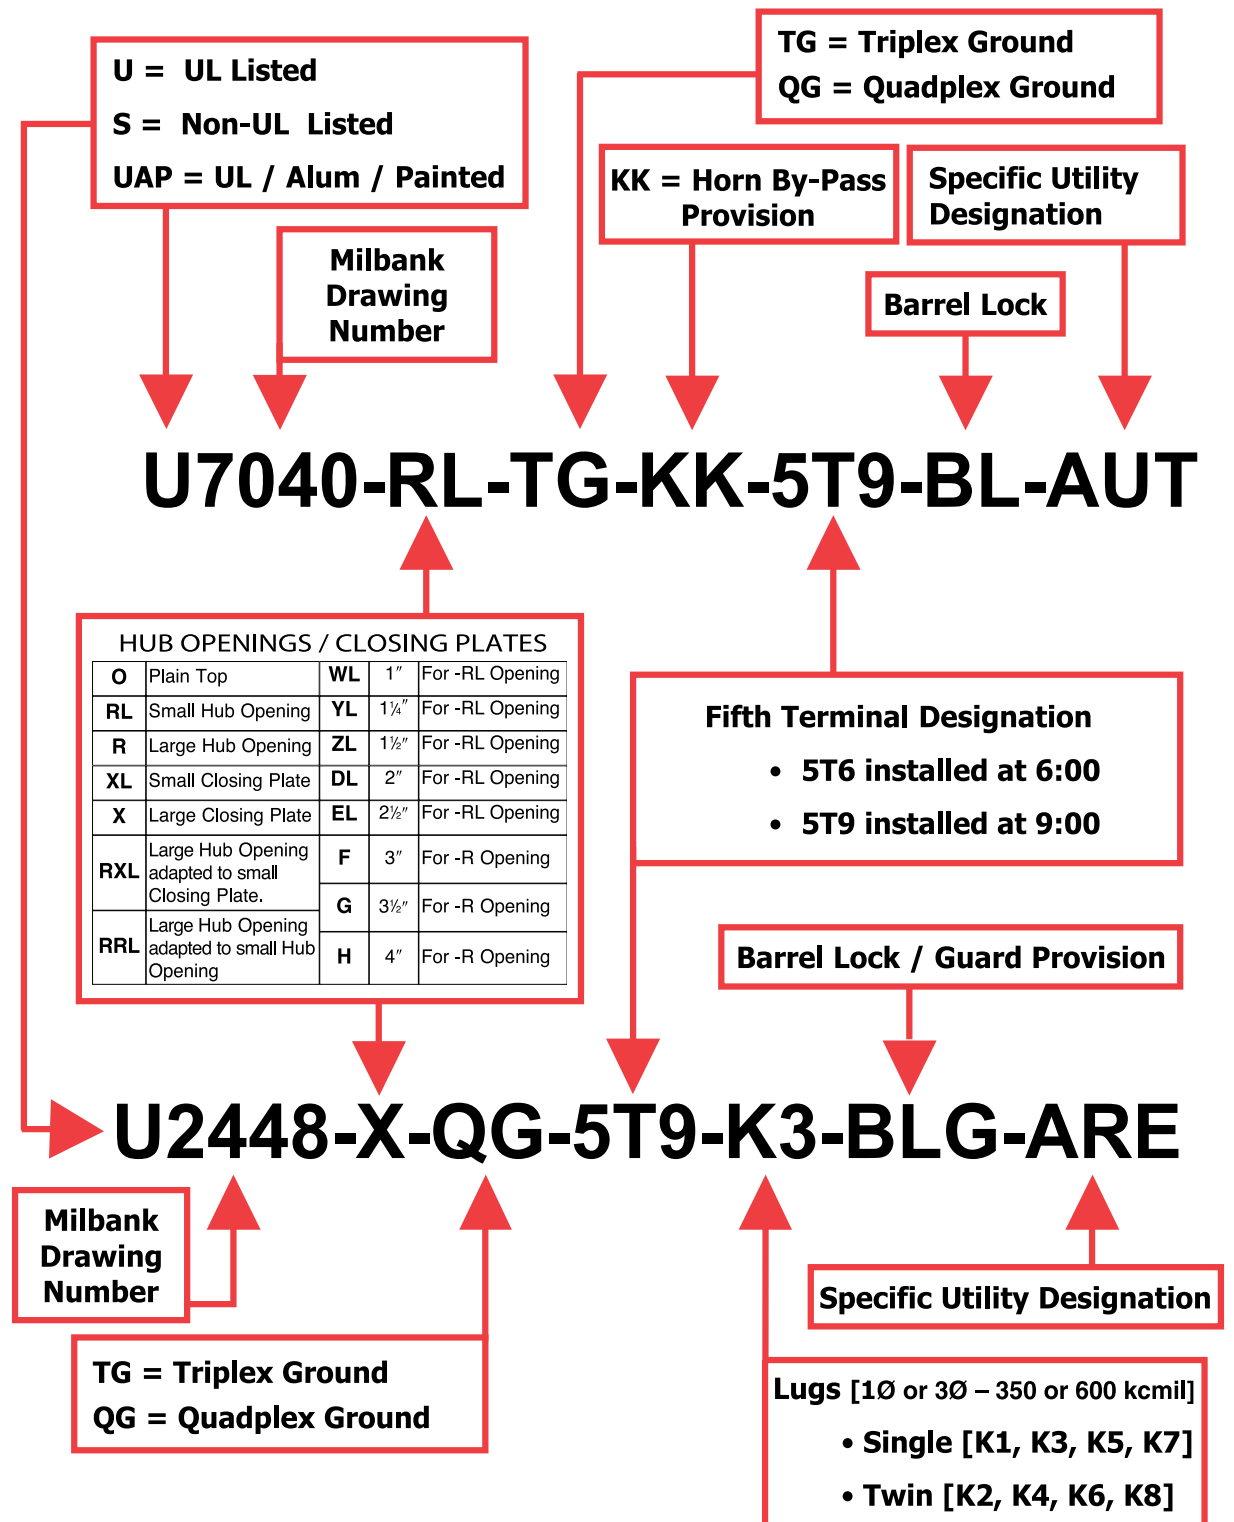


Single Position Sockets

200 Amp | 4 Terminal | Ringless





U7040-RL-TG

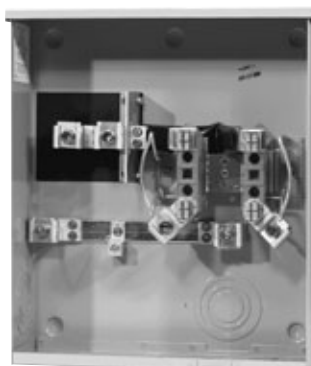



U1980-O





U4532-XL





7021



7040



1980
3850
4413**



4532
7043

200 Amp — 4 Terminal — Single Position — Ringless

Catalog Number	Service	Hub	Connectors CU/AL		Bypass	Dimensions			Knockouts			
			Line	Load		D"	W"	H"	1	2	3	4
U7021-RL-TG	OH	H.O.	#6-350	#6-350	None*	4 $\frac{1}{8}$	8	15 $\frac{1}{2}$	2 $\frac{1}{2}$	$\frac{1}{4}$, $\frac{1}{2}$	$\frac{1}{4}$	—
U7040-RL-TG	OH/UG	H.O.	#6-350	#6-350	None*	4 $\frac{1}{8}$	11	14 $\frac{1}{2}$	2 $\frac{1}{2}$	$\frac{1}{4}$, $\frac{1}{2}$	$\frac{1}{4}$	—
U7043-XL-TG	OH/UG	C.P.	#6-350	#6-350	None*	4 $\frac{7}{8}$	13	15 $\frac{1}{2}$	3	2 $\frac{1}{2}$	$\frac{1}{4}$, $\frac{1}{2}$	$\frac{1}{4}$
U3850-O-TG	UG	Blank	#6-350	#6-350	None*	4 $\frac{1}{2}$	13	15 $\frac{1}{4}$	3	2 $\frac{1}{2}$	1 $\frac{1}{2}$	$\frac{1}{4}$, $\frac{1}{2}$
U1980-O	UG	Blank	#6-350	#6-350	None*	4 $\frac{1}{2}$	13	15 $\frac{1}{4}$	3	2 $\frac{1}{2}$	1 $\frac{1}{2}$	$\frac{1}{4}$, $\frac{1}{2}$
U4413-O**	UG	Blank	#6-350	#6-350	None*	4 $\frac{1}{2}$	13	15 $\frac{1}{4}$	2 $\frac{1}{2}$	$\frac{1}{4}$, $\frac{1}{2}$	$\frac{1}{4}$	—
U4532-XL	OH/UG	C.P.	#6-350	Dual #6-350	None	4 $\frac{7}{8}$	15	20 $\frac{1}{2}$	3	2 $\frac{1}{2}$	$\frac{1}{4}$, $\frac{1}{2}$	$\frac{1}{4}$

Notes

- **Fifth Terminal:** For field mounted fifth terminal, order catalog number **K5T** to fit into square opening at the 9 o'clock position.
- **Connectors:** Extruded aluminum connectors are tin plated. Units are supplied with triplex ground.
- ***Bypass:** Horn type bypass is available. Add suffix **-KK**.
- ****U4413:** Design is mirror image of U1980 with left meter position.

