


Catalog Number Logic

How our product catalog numbers are derived



Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.

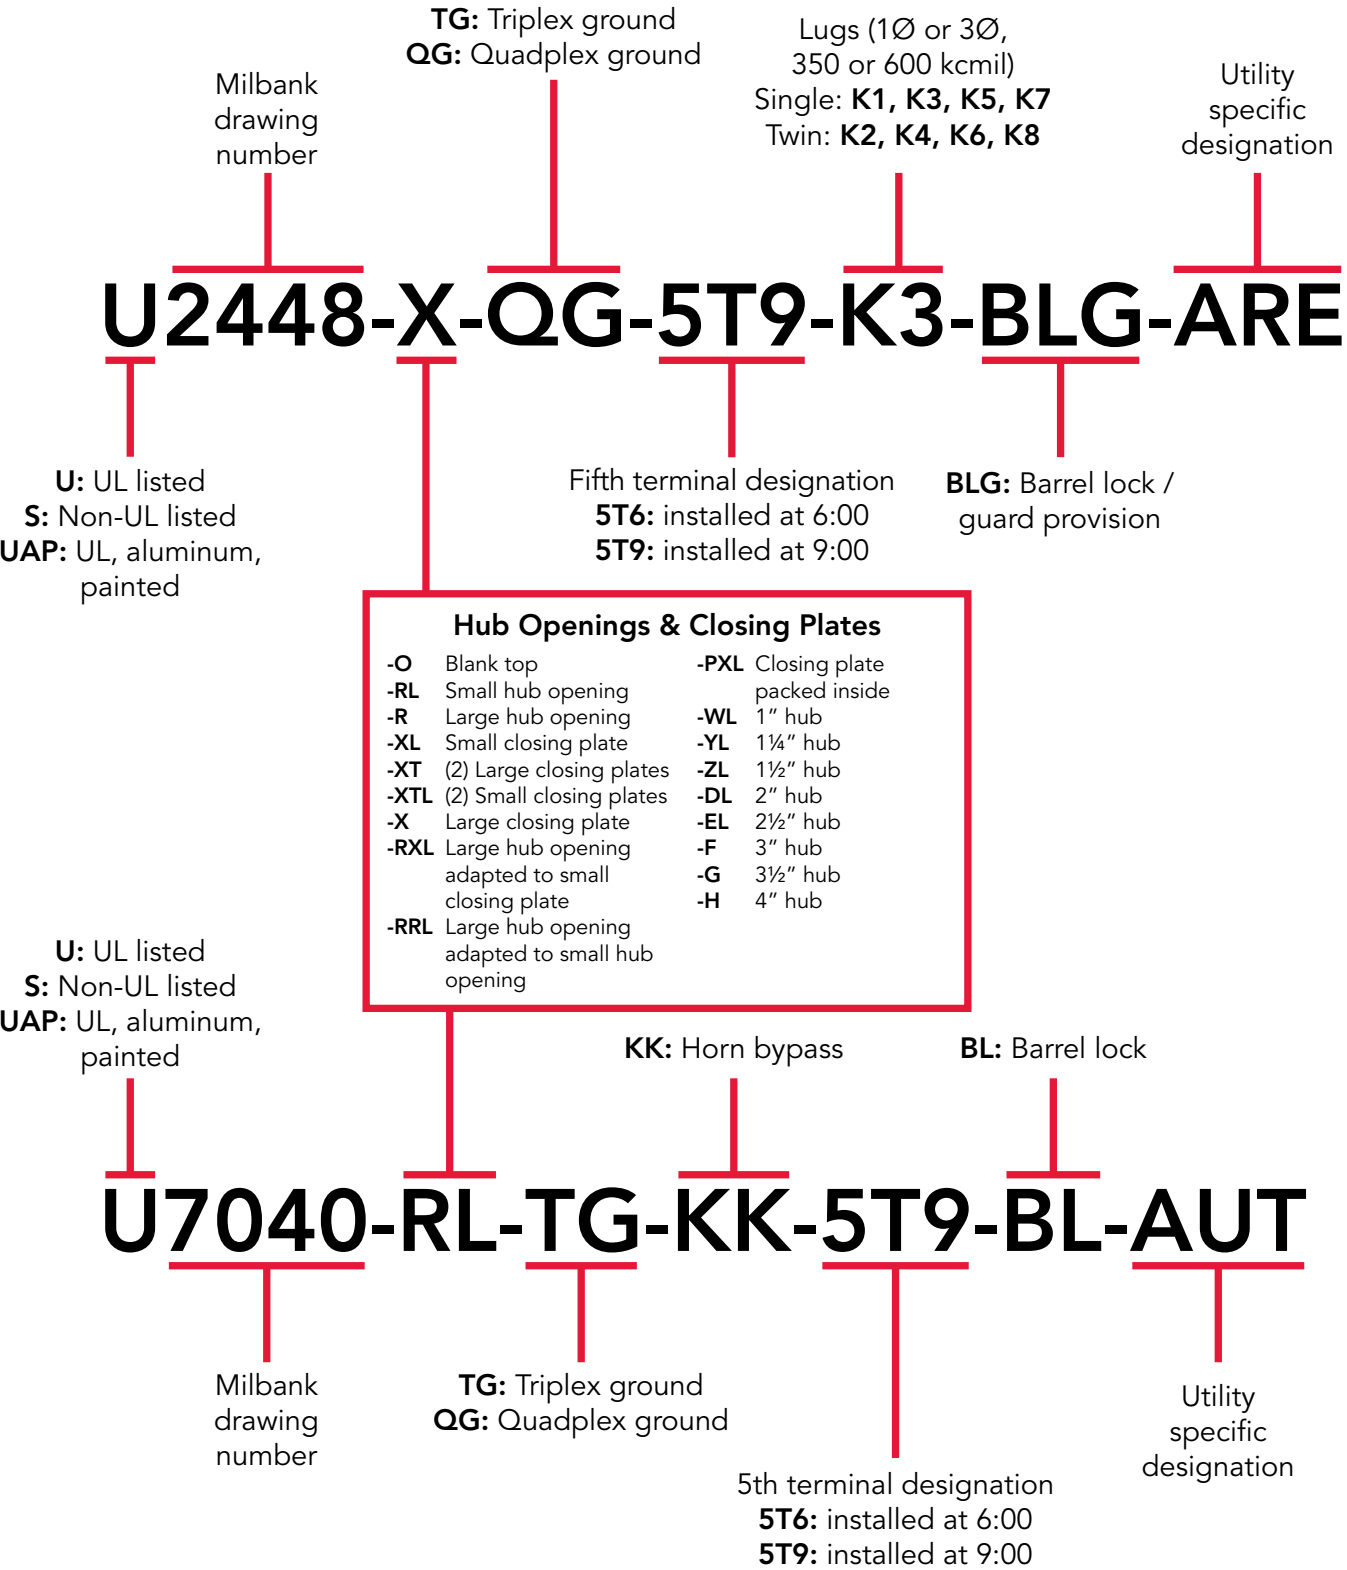

Single Position Lever Bypass

320 Amps | 4 & 5 Terminals | Ringless | 600 VAC








U1779-RRL-K3-K2-ALT

U1797-O-K3L-K2L

U2448-X

U3000-O-K3L-K2L-ALT



Alliant Approved | 320 Amps | Lever Bypass | Ringless | 600 VAC

Catalog Number	Terminals	Service	Hub	Connectors CU/AL		Dimensions			Knockouts			
				Line	Load	D"	W"	H"	1	2	3	4
U1779-RRL-K3-K2-ALT	4	OH	H.O.	#4-600 or (2) 1/0-250	(2) #6-350	4 ²⁷ / ₃₂	13	38 ³ / ₄	3	2 ¹ / ₂	1 ¹ / ₄ , 1 ¹ / ₂	1 ¹ / ₄
U1797-O-K3L-K2L	4	UG	Blank	(1) #4-600 or (2) 1/0-250	(2) #6-350	4 ²⁷ / ₃₂	15	30	3	1 ¹ / ₄ , 1 ¹ / ₂	1 ¹ / ₄	—
U3000-O-K3L-K2L-ALT	4	UG	Blank	#4-600 or (2) 1/0-250	(2) #6-350	4 ²⁷ / ₃₂	15	30	3	1 ¹ / ₄ , 1 ¹ / ₂	1 ¹ / ₄	—

MidAmerican Approved | 320 Amps | Lever Bypass | Ringless | 600 VAC

Catalog Number	Terminals	Service	Hub	Connectors CU/AL		Dimensions			Knockouts			
				Line	Load	D"	W"	H"	1	2	3	4
U1779-RRL-K3-K2	4	OH	H.O.	(1) #4-600 or (2) 1/0-250	(2) #6-350	4 ²⁷ / ₃₂	13	38 ³ / ₄	3	2 ¹ / ₂	1 ¹ / ₄ , 1 ¹ / ₂	1 ¹ / ₄
U1797-O-K3L-K2L	4	UG	Blank	(1) #4-600 or (2) 1/0-250	(2) #6-350	4 ²⁷ / ₃₂	15	30	3	1 ¹ / ₄ , 1 ¹ / ₂	1 ¹ / ₄	—
U2448-X	4	OH/UG	C.P.	3/8" x 16 Studs	3/8" x 16 Studs	6 ¹ / ₂	17 ³ / ₄	34 ¹ / ₈	4	3	1	1 ¹ / ₄
U3000-O-K3L-K2L-ALT	4	UG	Blank	#4-600 or (2) 1/0-250	(2) #6-350	4 ²⁷ / ₃₂	15	30	3	1 ¹ / ₄ , 1 ¹ / ₂	1 ¹ / ₄	—
U2448-X-5T9	5	OH/UG	C.P.	3/8" x 16 Studs	3/8" x 16 Studs	6 ¹ / ₂	17 ³ / ₄	34 ¹ / ₈	4	3	1	1 ¹ / ₄
U2124-X-5T9	5	UG	C.P.	3/8" x 16 Studs	3/8" x 16 Studs	5 ³ / ₄	16	30	4	3 ¹ / ₂	1	1 ¹ / ₄

Notes

- **Hubs:** For proper hub selection, see the hub suffix chart on the accessories page.
- **Anti-Inversion Kit:** If anti-inversion kit is required, order catalog number **K4802** as extra.
- **Connectors:** Extruded aluminum connectors are tin plated. See accessories page for lug kits.



Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.