

TORKALERT™

Mechanical & Strobe Horns

STROBE HORNS - See Fig. 1

APPLICATIONS

- High performance for industrial signaling applications. Offers high sound output, low current draw and dependable operation.
- Strobes use xenon flashtube, ideal for maximum efficiency and reliability.
- **Note:** TA880-N5 For outdoor use, unit must be mounted in a TA-WBBF outdoor backbox. TA5508H-G1 for indoor mounting only.

FEATURES

- **Alarm:** Penetrating mechanical sound.
- **Wiring:** Low current draw. Horn may be wired separately
- **Mounting:** 4" square surface mounting.


MECHANICAL HORNS - See Fig. 2-4

APPLICATIONS

- Loud tone with typical decibel output of 87dB at 10 feet. Low frequency resonance for strong penetration of noisy areas like boiler rooms, water pumping stations, elevators and air compressor rooms.
- **Note:** Use TORK® signal timers for 24 hour or 7 day scheduling, see page 358.

FEATURES

- **Input Voltage:** Wide input voltage ratings for compatibility with unregulated power supplies.
- **Wiring:** Screw terminals for convenient IN/OUT wiring. Low current draw for minimizing power supply and wiring cost.
- **Housing:** Steel, painted Dawn Mist. Resonant grill design for high sound output.
- **Mounting:** To indoor box TA-BBSF or outdoor box TA-WBBF, see accessories page 453.

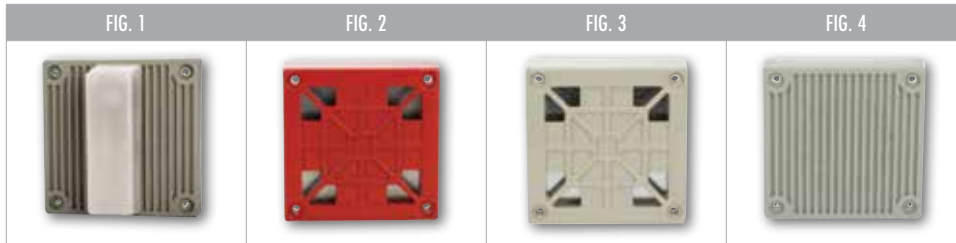

CAT. NO.	FIG. NO.	CERTIFICATION	UPC CODE	INPUT VOLTAGE	INPUT CURRENT (AMPS)	dB @10 FEET	CANDELA
TA880-N5	1	cULus	96015	120VAC	0.115	96	15
TA874-N5R (Red)	2	UL	97613	120VAC, 60Hz	0.070	87	—
TA874-N5	3	UL	96023	120VAC, 60Hz	0.070	87	—
TA875-G1	4	UL	97687	24VDC	0.035	—	—
WITH WEATHERPROOF BACKBOX TA-WBBF UL LISTED FOR OUTDOOR USE							
TA876-N5	3	UL	96026	120VAC, 60Hz	0.070	87	—

TORKALERT™

Transformers, Accessories & Replacements

APPLICATIONS

- Engineered to ensure long use for bells, buzzers and chimes.



CAT. NO.	FIG. NO.	CERTIFICATION	UPC CODE	TYPE	VOLTS-AMPS (VA)	PRIMARY VOLTAGE AC	SECONDARY VOLTAGE AC	Hz
TA590	1		96104	Bell	5	120	10	60
TA591	2		96105	Chime	10	120	16	60
TA592	3		96106	Tri-Volt	10-10-20	120	8-16-24	50/60
TA598	4		96602	Tri-Volt	20-30-30	120	8-16-24	60
TA599	5		96108	Heavy Duty	40	120	24	60
TA1245Y-50	6		96166	Heavy Duty	50VA	120/208/240	24	60
TA1245Y-75	7		96167	Heavy Duty	75VA	120/208/240	24	60

REPLACEMENT ACCESSORIES				
UNIT	CAT. NO.	UPC CODE	DESCRIPTION	
TA93-2	TA-L6-2	96982	110VAC Xenon Flash Tube	
TA52	TA-L8	96134	110VAC Bulb	
TA94	TA-L10	96136	110VAC Xenon Flash Tube	
TA-94	TA-L10-1	96981	110VAC Xenon Flash Tube	
TA502	TA502SW	96966	Replacement switch	
TA874 Series	TA-BBSF	97694	Backbox – 4" painted Down Mist 3/4" and 1" KO's	
TA874 Series	TA-WBBF	97692	Weatherproof Backbox – 1/2" KO's 4" painted Down Mist	
TA-BBSF, TA-WBBF	TA-SFPF	97707	Semi-Flush plate – Down Mist	
TA-BBSF, TA-WBBF	TA-SFPER	97697	Semi-Flush plate – Red	
TA47, TA94	TA-ADR	96111	Acrylic Dome – Red	
TA47, TA94	TA-ADA	96311	Acrylic Dome – Amber	
TA52, TA53	TA-D5B	96419	Acrylic Dome – Blue	
TA54	TA-D6A	96320	Dome – Amber	
TA93, TA94	TA-D7R	96121	Fresnal Dome – Red	
TA93, TA94	TA-D7A	96321	Fresnal Dome – Amber	
TA93, TA94	TA-D7C	96621	Fresnal Dome – Clear	
TA131D	TA-D8R	96970	Acrylic Dome – Red	