

NON-METALLIC CABLE CONNECTORS PUSH-IN TYPE

PRODUCT FEATURES

- ▶ Flame-retardant Polypropylene
- ▶ Special gripping arrangement for easy cable insertion

Cat. No.	For Use With	Trade Size	Std. Pkg.	Master Ctn.
NMP-50	One 10, 12, 14 AWG two-conductor cables with or without ground wire	1/2"	100	300



PLASTIC NON-METALLIC CABLE QUICK-LOCK CONNECTORS

PRODUCT FEATURES

- ▶ Easy and fast installation
- ▶ Simply remove with screwdriver if necessary

Cat. No.	NM Cable Range	Trade Size	KO Size	Std. Pkg.	Master Ctn.
PQLC-38	14/2 - 10/3	3/8"	1/2"	100	1000
PQLC-75	14/3 - 6/3	3/4"	3/4"	50	500



PQLC-38



PQLC-75

PLASTIC UNIVERSAL METAL STUD GROMMET

PRODUCT FEATURES


- ▶ High Strength, non-conductive polypropylene
- ▶ Universal design fits into a standard 1" trade size hole and all factory-punched stud holes
- ▶ Lightweight material eases installation

Cat. No.	Description	Std. Pkg.
PUSG	Universal Snap-in Type Bushings for metal stud, fit all factory punched metal stud holes	100




INSTALLATION INSTRUCTION:

- Step1:** Separate the two halves
- Step2:** Snap the bushing end and the washer end together through the hole
- Step3:** Install cable through the grommet



COMMON HOLE SHAPES IN METAL STUDS:

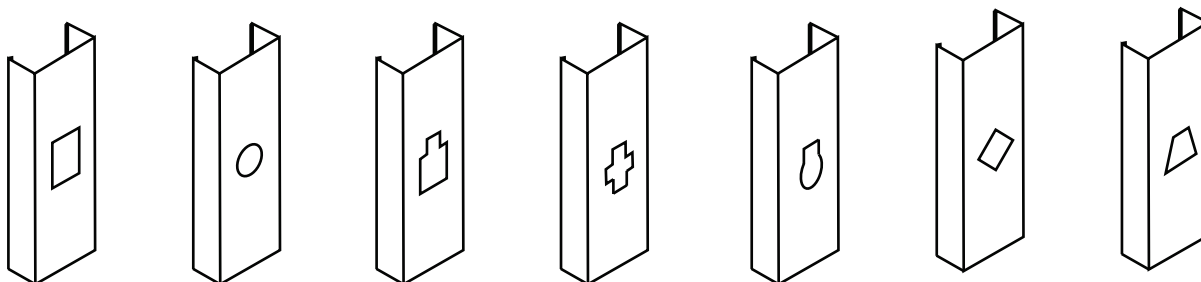

STEEL FLEX BUSHINGS

PRODUCT FEATURES

- ▶ Electroplated Zinc
- ▶ Used to insulate cut Flex when the conduit is used for data cables without a junction box

Cat. No.	Trade Size	Std. Pkg.	Master Ctn.
FB-50	1/2"	100	1000
FB-75	3/4"	100	500
FB-100	1"	25	250



Shown Installed

PLASTIC EMT BUSHINGS

PRODUCT FEATURES

- ▶ Protects wires from damage by sharp edges of EMT
- ▶ Size 2-1/2" to 4" can also be used for Rigid, IMC and PVC conduit

NOTE

- ▶ Color may vary

Cat. No.	Trade Size	Std. Pkg.	Master Ctn.
TPB-50	1/2"	100	1000
TPB-75	3/4"	100	1000
TPB-100	1"	50	500
TPB-125	1-1/4"	25	250
TPB-150	1-1/2"	25	250
TPB-200	2"	10	100
TPB-250	2-1/2"	10	100
TPB-300	3"	-	20
TPB-350	3-1/2"	-	20
TPB-400	4"	-	10



PLASTIC NON-METALLIC CABLE QUICK-LOCK CONNECTORS

PRODUCT FEATURES

- ▶ Easy and fast installation
- ▶ Simply remove with screwdriver if necessary

Cat. No.	NM Cable Range	Trade Size	KO Size	Std. Pkg.	Master Ctn.
PQLC-38	14/2 - 10/3	3/8"	1/2"	100	1000
PQLC-75	14/3 - 6/3	3/4"	3/4"	50	500



PQLC-38



PQLC-75

PLASTIC UNIVERSAL METAL STUD GROMMET

PRODUCT FEATURES


- ▶ High Strength, non-conductive polypropylene
- ▶ Universal design fits into a standard 1" Trade Size hole and all factory-punched stud holes
- ▶ Lightweight material eases installation




Cat. No.	Description	Std. Pkg.
PUSG	Universal Snap-in type bushings for Metal Stud, fit all factory punched metal stud holes	100

INSTALLATION INSTRUCTION:

- Step1:** Separate the two halves
Step2: Snap the bushing end and the washer end together through the hole
Step3: Install cable through the grommet



COMMON HOLE SHAPES IN METAL STUDS:

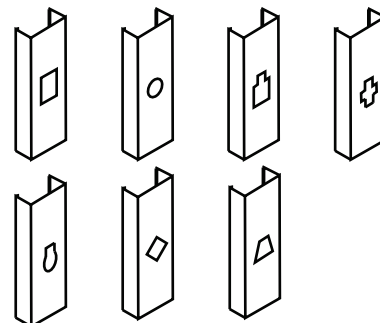




SPRING STEEL

CABLE/CONDUIT TO STUD ATTACHMENTS

- PRODUCT FEATURES
- Supports EMT conduit or MC/AC cable
 - Ensures conduit is in-line with junction box knockout
 - Allows for overlap of other fasteners sharing the same screw(s)
 - For wood or metal studs
 - Eliminates offset bending of conduit
 - Complies with NEC® Article 358.30(A), which requires conduit support within 36" of an electrical box
 - Complies with CEC Rule 12-1404, which requires conduit support within 1 m of an electrical box
 - Complies with CEC Rule 12-618, which requires support of armoured cable within 300 mm (12") of an electrical box

Cat. No.	EMT Size	Box Depth	Std. Pkg.
FCS812	1/2", 3/4"	1-1/2"	100
FCS812D	1/2", 3/4"	2-1/8"	100
FCS16	1"	2-1/8"	100

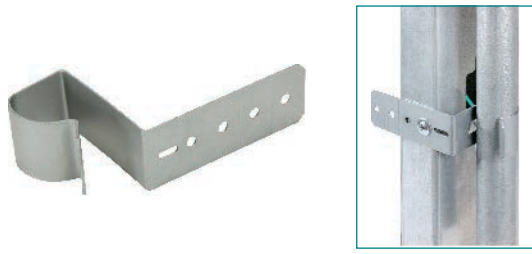


SPRING STEEL

MC/AC CABLE TO STUD CLIP

- PRODUCT FEATURES
- No tools required to install
 - Holes in clip allow it to be screwed into wood stud, concrete or block
 - Stabilizer legs provide "wobble-free" support
 - Compliant with NEC® Article 300.4(d), allowing cable to be positioned a minimum of 1-1/4" from face of stud
 - Compliant with CEC Rule 12-618 for support of MC/AC cable
 - Snaps in half, making two clips out of one

Cat. No.	Flange Thickness	MC/AC Size	Std. Pkg.
FMAC2	1/8" MAX	14/2 to 10/3	100

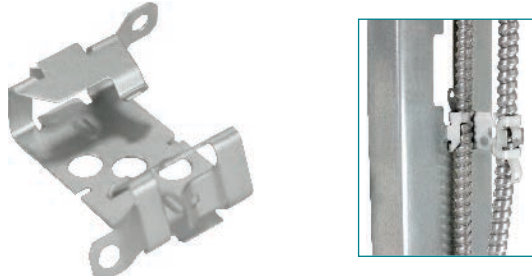


SPRING STEEL

MC/AC CABLE TO METAL STUD CLIP

- PRODUCT FEATURES
- Easy installation of MC/AC to metal stud
 - No tools required to install

Cat. No.	Outer Diameter	MC/AC Size	Std. Pkg.
MSC	0.429" - 0.531"	14/2 to 12/3	100

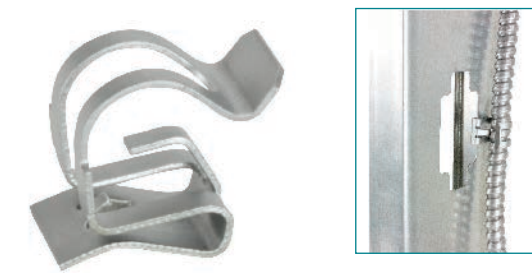

Electrical Fasteners

