


ESSE

SURFACE MOUNT EDGE-LIT LED EXIT SIGN

PRODUCT FEATURES

- ▶ Dual-Voltage Input 120/277VAC Operation (Except 2C models)
- ▶ UL Listed for Damp Location
- ▶ Long-lasting, Energy Saving LED Lamps
- ▶ 90 Minutes Minimum Emergency Operation (**EB Only**)
- ▶ Premium Grade Extruded Aluminum Housing
- ▶ Aluminum Canopy for wall, ceiling, or end mounting included
- ▶ Field applied Chevrons Included
- ▶ UV Stabilized ultra clear acrylic Edge Lit Panel
- ▶ Single-Face Panels are **Clear**, Double-Face Panels are **Opaque**
- ▶ Push-to-Test Switch
- ▶ Long life, Maintenance-free 4.8V NiCd Battery (**EB Only**)
- ▶ Fully automatic operation (**EB Only**)

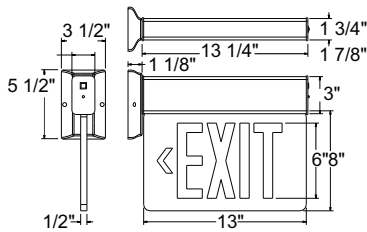

Cat. No.	Casing Color	No. of Faces	Letter Color	Operation	Options
ESSE	A (Aluminum)	1	R (Red)	EB (Battery Back-Up)	SDT (Self Diagnostic Test)
	W (White)	2	G (Green)	AC (AC Only)	2C-120 (Dual-Circuit Op., 120V)
	B (Black)				2C-277 (Dual-Circuit Op., 277V)




ESSE-A-2-R

ESRE

RECESSED MOUNT EDGE-LIT LED EXIT SIGN

PRODUCT FEATURES

- ▶ Dual-Voltage Input 120/277VAC Operation (Except 2C models)
- ▶ UL Listed for Damp Location
- ▶ Long-lasting, Energy Saving LED Lamps
- ▶ 90 Minutes Minimum Emergency Operation (**EB Only**)
- ▶ Premium Grade Extruded Aluminum Housing
- ▶ Adjustable Bar Hanger up to 24" for Recessed Mount
- ▶ Field applied Chevrons Included
- ▶ UV Stabilized ultra clear acrylic Edge Lit Panel
- ▶ Single-Face Panels are **Clear**, Double-Face Panels are **Opaque**
- ▶ Push-to-Test Switch
- ▶ Maintenance-free 4.8V NiCd Battery (**EB Only**)
- ▶ Fully automatic operation (**EB Only**)

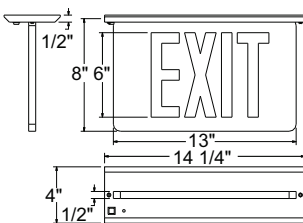

Cat. No.	Casing Color	No. of Faces	Letter Color	Operation	Options
ESRE	A (Aluminum)	1	R (Red)	EB (Battery Back Up)	SDT (Self Diagnostic Test)
	W (White)	2	G (Green)	AC (AC Only)	2C-120 (Dual-Circuit Op., 120V)
	B (Black)				2C-277 (Dual-Circuit Op., 277V)



ESRE-A-2-G