




ESBL

*THERMOPLASTIC LED EXIT SIGN
WITH BATTERY BACK-UP*

PRODUCT FEATURES

- ▶ Dual-Voltage Input 120/277VAC Operation
- ▶ UL Listed for Damp Location
- ▶ Long-lasting, Energy Saving LED Lamps
- ▶ 90 Minutes Minimum Emergency Operation
- ▶ Injection Molded, 5VA Flame Retardant, High Impact, Thermoplastic
- ▶ Universal Mounting Pattern
- ▶ Canopy for ceiling or end mounting included
- ▶ Easy Snap-out Chevrons Directional Indicators
- ▶ Extra Faceplate included for field conversion to Double-Face
- ▶ Push-to-Test Switch
- ▶ Maintenance-free 4.8V NiCd Battery
- ▶ Fully automatic operation

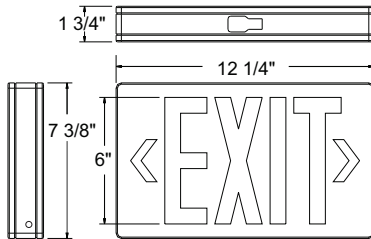

ESBL-W-R




Cat. No.	Housing Color	Letter Color	Options
ESBL	W (White) B (Black)	R (Red) G (Green)	SDT (Self Diagnostic Test) RC (Remote Capable)

ESL

THERMOPLASTIC LED EXIT SIGN

PRODUCT FEATURES

- ▶ Dual-Voltage Input 120/277VAC Operation (Except 2C models)
- ▶ UL Listed for Damp Location
- ▶ Long-lasting, Energy Saving LED Lamps
- ▶ Injection Molded, 5VA Flame Retardant, High Impact, Thermoplastic
- ▶ Universal Mounting Pattern
- ▶ Canopy for ceiling or end mounting included
- ▶ Easy Snap-out Chevrons Directional Indicators
- ▶ Extra Faceplate included for field conversion to Double-Face

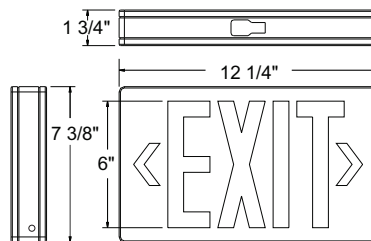

ESL-W-R



Cat. No.	Housing Color	Letter Color	Options
ESL ESL2C (Dual Circuit)	W (White) B (Black)	R (Red) G (Green)	Blank (AC Only) 2C-120 (Dual-Circuit Op., 120V) 2C-277 (Dual-Circuit Op., 277V)