

## ESLA


### CAST ALUMINUM LED EXIT SIGN

#### PRODUCT FEATURES

- ▶ Dual-Voltage Input 120/277VAC Operation (Except 2C models)
- ▶ UL Listed for Damp Location
- ▶ Long-lasting, Energy Saving LED Lamps
- ▶ 90 Minutes Minimum Emergency Operation (**EB Only**)
- ▶ Premium Grade Aluminum Housing
- ▶ Universal Mounting Pattern
- ▶ Aluminum Canopy for ceiling or end mounting included
- ▶ Knockout Chevrons Directional Indicators
- ▶ Push-to-Test Switch
- ▶ Maintenance-free 4.8V NiCd Battery (**EB Only**)
- ▶ Fully automatic operation (**EB Only**)



ESLA-B-A-1-G

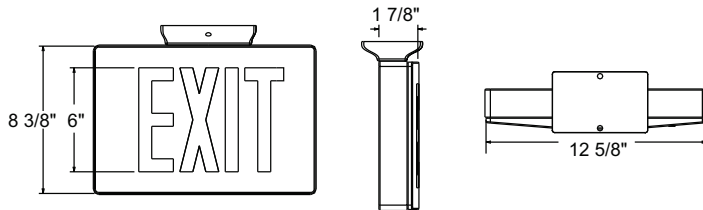

Cat. No.	Housing Color	Faceplate	No. of Faces	Letter Color	Operation	Options
ESLA	A (Aluminum)	A (Aluminum)	1	R (Red)	EB (Battery Back-Up)	SDT (Self Diagnostic Test)
	W (White)	W (White)	2	G (Green)	AC (AC Only)	2C-120 (Dual-Circuit Op., 120V)
	B (Black)	B (Black)			Blank (If 2C)	2C-277 (Dual-Circuit Op., 277V)

## ESLAM


### MICRO CAST ALUMINUM LED EXIT SIGN

#### PRODUCT FEATURES

- ▶ Dual-Voltage Input 120/277VAC Operation
- ▶ UL Listed for Damp Location
- ▶ Long-lasting, Energy Saving LED Lamps
- ▶ 90 Minutes Minimum Emergency Operation (**EB Only**)
- ▶ Premium Grade Aluminum Housing
- ▶ Universal Mounting Pattern
- ▶ Aluminum Canopy for ceiling or end mounting included
- ▶ Knockout Chevrons Directional Indicators
- ▶ Push-to-Test Switch
- ▶ Maintenance-free 2.4V NiCd Battery (**EB Only**)
- ▶ Fully automatic operation (**EB Only**)



ESLAM-B-A-G

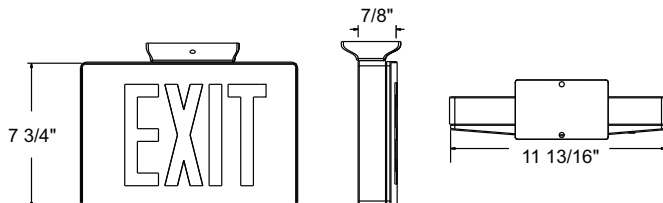

Cat. No.	Housing Color	Faceplate	No. of Faces	Letter Color	Operation
ESLAM	B (Black)	A (Aluminum) W (White) B (Black)	1 (Blank) 2	R (Red) G (Green)	EB (Battery Back-Up) AC (AC Only)