



UNIVERSAL FIREBLOK SUPPRESSION INSERT

PRODUCT FEATURES

- ▶ One SKU fits single gang, 4" and 4-11/16" square boxes via break-apart design
- ▶ Non-Conductive
- ▶ Intumescent thermoplastic
- ▶ Pre-molded opening to accommodate raised grounding provisions and wiring access
- ▶ Up to 2 Hour Fire Rated
- ▶ Will not dry out or crumble
- ▶ Soundproof with STC Rating of 52**
- ▶ Certified for both Plastic and Metal faceplates in all fire-rated walls
- ▶ 95% labor savings over Putty Pad technology

* By Fireblok IP Holdings
** Tested in a UL 411 wall assembly to ASTM E90




Cat. No.	Description	Std. Pkg.	Master Ctn
UFSI NEW	Universal Firestop Insert for 1G, 4", 4-11/16" Electrical Box, White	30	120

NEW





UFSI



Break-apart Design

Cut-In Box: 1/2 Insert 4" Sq. Box: 1 Insert 4-11/16" Sq. Box: 1-1/2 Inserts

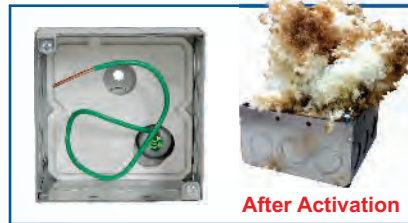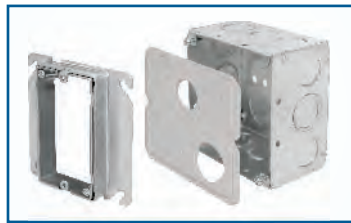

After Activation



The Universal Firestop Insert adheres to the inside of most 1-Gang, 4", or 4-11/16" electrical boxes

Call on Orbit to install Firestop Inserts in the box of your choice

Expands 20+ times its size when exposed to temperatures above 220° F

TRADITIONAL

No more field installed putty

FIRESTOP PUTTY PADS AND STICKS*

PRODUCT FEATURES

- ▶ Applied by hand with no curing time
- ▶ Pad is soundproof with STC Rating of 60**
- ▶ Intumescent at 220°F
- ▶ Reusable
- ▶ Adheres to all common building surfaces
- ▶ Up to 3 Hour Fire Rated

* By Metacaulk
** Tested in a UL 441 wall assembly/section to ASTM E90

Cat. No.	Description	Std. Pkg.
FSPS18	Firestop Putty Stick, 18 Cu. In., Red	12
FSPP67	Firestop Putty Pad, 6" x 7" x 1/8", Red	20
FSPP77	Firestop Putty Pad, 7" x 7" x 1/8", Red	20



FSPS18



FSPP67
FSPP77



Putty Sticks seal around penetrating items such as cables, conduits and metal pipes.



Maintain the hourly rating of fire-rated walls as well as reduce sound transmission.

PUTTY STICKS

PUTTY PADS