

Aluminum Dual Rated Lugs - Six Hole Tongue Type L3A

For use with three copper or aluminum conductors

- Manufactured from high strength aluminum alloy extrusion
- Electro-tin plated to ensure minimum contact resistance and protection against corrosion when used with copper wire
- Six hole pad allows for two or four bolt mounting configurations which provide maximum surface contact in heavy duty applications
- Larger connector sizes utilize tandem set screws that provide superior mechanical performance*
- Connectors are rated for 600 V, 90°C applications
- The use of oxide inhibitor is recommended for all aluminum terminations



486A-486B
LISTED
AL9CU

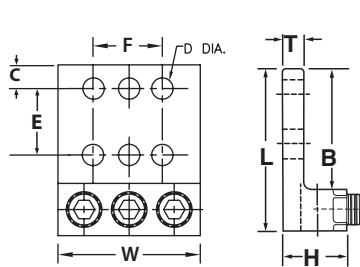


FIG. 1




FIG. 2

CATALOG NUMBER	FIG. NO.	CONDUCTOR RANGE	APPROXIMATE DIMENSIONS (IN.)								MTG. BOLT SIZE	HEX SIZE	
			L	W	H	T	B	C	D (DIA.)	E			F
L3A-250-2	1	6 Str. - 250 kcmil	4.00	3.00	1.19	.31	3.00	.63	.56	1.75	1.75	1/2	5/16
L3A-250-4	1		4.00	3.00	1.19	.31	3.00						5/16
L3A-350-2+.	1	6 Str. - 350 kcmil	4.19	3.00	1.13	.25	3.06						3/8
L3A-350-4+.	1		4.19	3.00	1.13	.25	3.06						3/8
L3A-600-2	1	2 Str. - 600 kcmil	4.63	3.75	1.56	.44	3.38						3/8
L3A-600-4	1		4.69	3.75	1.56	.44	3.31						3/8
*L3A-800-2+.	2	300 - 800 kcmil	6.19	4.25	1.88	.56	3.44						1/2
*L3A-800-4+.	2		6.19	3.50	1.88	.56	3.44						1/2

*Not UL listed

+Not CSA certified