


## Aluminum Stacked Neutral Bars



### Type SNB

For aluminum or copper conductors

- Assembly is suitable for grounding applications
- Preassembled, stacked neutral bars provide a compact design offering range taking flexibility
- Electro-tin plated neutral bars and stacking lugs provide low contact resistance suitable for bimetallic applications
- The stacking lugs are UL 486A-486B listed AL9CU
- The neutral bars are UL component recognized
- Available with phenolic base, catalog number R-16

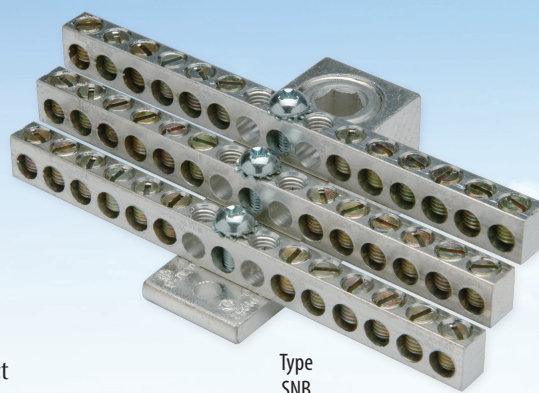

Type  
SNB

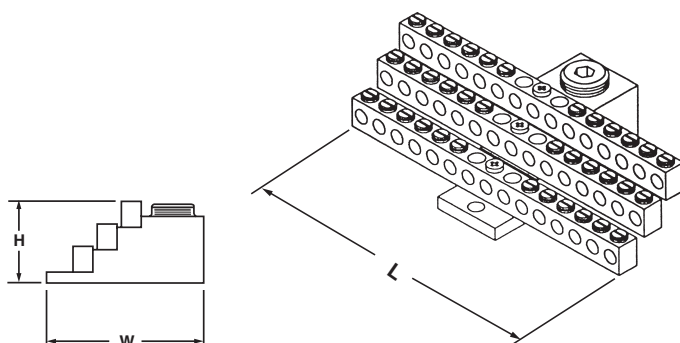

R-16

| CATALOG<br>NUMBER | CONDUCTOR RANGE<br>(AWG)                                                                 |                  | NUMBER<br>OF TAPS | APPROXIMATE DIMENSIONS<br>(IN.) |      |      |
|-------------------|------------------------------------------------------------------------------------------|------------------|-------------------|---------------------------------|------|------|
|                   | MAIN                                                                                     | TAP              |                   | H                               | W    | L    |
| SNB350-12         | 6 Str. - 350 kcmil                                                                       | 14 Str. - 6 Str. | 12                | 1.53                            | 2.53 | 4.73 |
| SNB350-24         |                                                                                          |                  | 24                |                                 |      | 4.73 |
| SNB350-30         |                                                                                          |                  | 30                |                                 |      | 4.08 |
| SNB350-36         |                                                                                          |                  | 36                |                                 |      | 4.73 |
| SNB350-42         |                                                                                          |                  | 42                |                                 |      | 5.31 |
| R-16              | Mounting block of general purpose phenolic<br>suitable for mounting any SNB neutral bars |                  |                   | 1.00                            | 2.50 | 2.50 |