


Bronze Ground Clamp Connectors

Type GPL


- Clamp is manufactured from high copper content alloy
- Used to connect copper ground conductor to water pipe, rod, or structured tube
- Furnished with silicon bronze u-bolt, nuts, and lockwashers for corrosion resistance
- Clamp design allows ground conductor to run parallel to pipe or to be installed at a right angle for grounding several parallel pipes
- Suitable for direct burial in earth or concrete
- Single wrench installation
- UL 467 listed

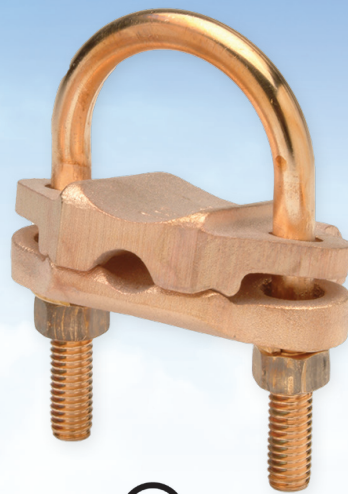

CATALOG NUMBER	ACCOMMODATES		CONDUCTOR RANGE	APPROXIMATE DIMENSIONS (IN.)			BOLT SIZE
	ROD	IPS		A	B	C	
GPL-1*	1/2	1/4	8 Sol. - 4 Str.	1.38	2.50	1.88	3/8
GPL-2*			4 Sol. - 2/0 Str.	1.63	2.50	1.88	3/8
GPL-3*			2/0 Sol. - 250 kcmil	1.88	2.50	1.88	3/8
GPL-4	5/8 or 3/4	3/8	8 Sol. - 4 Str.	1.38	2.75	2.00	3/8
GPL-5			4 Sol. - 2/0 Str.	1.63	2.75	2.00	3/8
GPL-6			2/0 Sol. - 250 kcmil	1.88	2.75	2.00	3/8
GPL-7*	5/8 or 1	3/8 or 3/4	300 - 500 kcmil	2.25	3.50	2.38	1/2
GPL-8	7/8 or 1	1/2 or 3/4	8 Sol. - 4 Str.	1.38	2.63	2.38	3/8
GPL-9			4 Sol. - 2/0 Str.	1.63	2.63	2.38	3/8
GPL-10			2/0 Sol. - 250 kcmil	1.88	3.00	2.38	3/8
GPL-12*			500 - 750 kcmil	2.63	3.75	2.75	1/2
GPL-13*			750 - 1000 kcmil	3.00	4.00	3.50	1/2
GPL-14	-	1	8 Sol. - 4 Str.	1.38	2.75	2.63	3/8
GPL-15			4 Sol. - 2/0 Str.	1.63	2.75	2.63	3/8
GPL-16			2/0 Sol. - 250 kcmil	1.88	3.25	2.63	3/8
GPL-17*			300 - 500 kcmil	2.38	4.50	3.00	1/2
GPL-18*			500 - 750 kcmil	2.63	4.50	3.00	1/2
GPL-19*			750 - 1000 kcmil	3.00	4.75	3.50	1/2
GPL-20	-	1 1/4	8 Sol. - 4 Str.	1.38	3.50	3.00	3/8
GPL-21			4 Sol. - 2/0 Str.	1.63	3.50	3.00	3/8
GPL-22			2/0 Sol. - 250 kcmil	1.88	3.50	3.00	3/8
GPL-23*			300 - 500 kcmil	2.38	4.25	3.38	1/2
GPL-24*			500 - 750 kcmil	2.75	5.00	3.75	1/2
GPL-25*			750 - 1000 kcmil	3.00	5.50	4.25	1/2
GPL-26	-	1 1/2	8 Sol. - 4 Str.	1.38	4.00	3.25	3/8
GPL-27			4 Sol. - 2/0 Str.	1.63	4.00	3.25	3/8
GPL-28			2/0 Sol. - 250 kcmil	1.88	4.00	3.25	3/8
GPL-29*			300 - 500 kcmil	2.38	4.63	3.63	1/2
GPL-30*			500 - 750 kcmil	2.75	5.25	4.00	1/2
GPL-31*			750 - 1000 kcmil	3.00	5.75	4.50	1/2


* Not UL listed for 1/4" pipe

• UL listing is limited to a maximum wire size of 250 kcmil

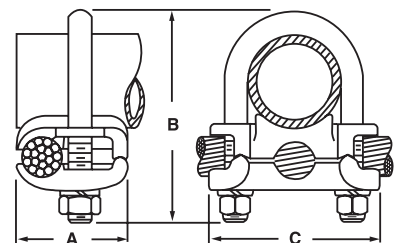

GROUNDING CONNECTORS

Bronze Ground Clamp Connectors Type GPL (continued)

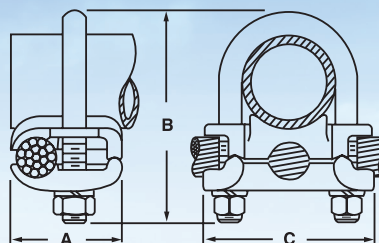

CATALOG NUMBER	ACCOMMODATES		CONDUCTOR RANGE	APPROXIMATE DIMENSIONS (IN.)			BOLT SIZE
	ROD	IPS		A	B	C	
GPL-32	—	2	8 Sol. - 4 Str.	1.38	4.25	3.75	3/8
GPL-33			4 Sol. - 2/0 Str.	1.63	4.25	3.75	3/8
GPL-34			2/0 Sol. - 250 kcmil	1.88	4.25	3.75	3/8
GPL-35•			300 - 500 kcmil	2.38	5.25	4.00	1/2
GPL-36•			500 - 750 kcmil	2.75	5.50	4.50	1/2
GPL-37•			750 - 1000 kcmil	3.00	6.00	5.00	1/2
GPL-38	—	2 1/2	8 Sol. - 4 Str.	1.38	5.00	4.25	3/8
GPL-39			4 Sol. - 2/0 Str.	1.63	5.00	4.25	3/8
GPL-40			2/0 Sol. - 250 kcmil	1.88	5.00	4.25	3/8
GPL-41			300 - 500 kcmil	2.38	5.63	4.25	1/2
GPL-42			500 - 750 kcmil	2.75	6.00	5.00	1/2
GPL-43			750 - 1000 kcmil	3.00	6.50	5.50	1/2
GPL-44	—	3	8 Sol. - 4 Str.	1.38	5.50	4.75	3/8
GPL-45			4 Sol. - 2/0 Str.	1.63	5.50	4.75	3/8
GPL-46			2/0 Sol. - 250 kcmil	1.88	5.50	4.75	3/8
GPL-47•			300 - 500 kcmil	2.38	6.25	5.25	1/2
GPL-48•			500 - 750 kcmil	2.75	6.75	5.50	1/2
GPL-49•			750 - 1000 kcmil	3.00	7.25	6.00	1/2
GPL-50	—	3 1/2	8 Sol. - 4 Str.	1.38	6.25	5.25	3/8
GPL-51			4 Sol. - 2/0 Str.	1.63	6.25	5.25	3/8
GPL-52			2/0 Sol. - 250 kcmil	1.88	6.25	5.25	3/8
GPL-53•			300 - 500 kcmil	2.38	6.75	5.75	1/2
GPL-54•			500 - 750 kcmil	2.75	7.25	6.00	1/2
GPL-55•			750 - 1000 kcmil	3.00	8.00	6.50	1/2
GPL-56	—	4	8 Sol. - 4 Str.	1.38	6.38	5.75	3/8
GPL-57			4 Sol. - 2/0 Str.	1.63	6.38	5.75	3/8
GPL-58			2/0 Sol. - 250 kcmil	1.88	6.38	5.75	3/8
GPL-59•			300 - 500 kcmil	2.38	6.75	6.25	1/2
GPL-60•			500 - 750 kcmil	2.75	8.00	6.50	1/2
GPL-61•			750 - 1000 kcmil	3.00	8.50	7.00	1/2
GPL-68	—	5	8 Sol. - 4 Str.	1.38	6.38	6.75	3/8
GPL-69			4 Sol. - 2/0 Str.	1.53	5.63	6.81	3/8
GPL-70			2/0 Sol. - 250 kcmil	1.88	6.13	6.81	3/8
GPL-71•			300 - 500 kcmil	2.31	6.13	7.13	1/2
GPL-75	—	6	4 Sol. - 2/0 Str.	1.53	5.88	7.88	3/8
GPL-76			2/0 Sol. - 250 kcmil	1.88	7.13	7.81	3/8
GPL-77•			300 - 500 kcmil	2.31	6.19	8.19	1/2
GPL-87	—	8	4 Sol. - 2/0 Str.	1.53	7.13	9.88	3/8

* Not UL listed for 1/4" pipe

• UL listing is limited to a maximum wire size of 250 kcmil