

Bronze Jumper Clamp Connectors

Type JC


- Manufactured from high strength copper alloy
- Designed for use as a ground connector in CATV and telecom installations
- Furnished with silicon bronze hex washer head bolt
- Interlocking design ensures proper conductor alignment
- Single wrench installation
- Available tin plated, unplated, or with plating in one groove



CATALOG NUMBER	CONDUCTOR RANGE	FINISH OF GROOVES	BOLT MATERIAL	APPROXIMATE DIMENSIONS (IN.)	
				L	W
JC-1-AC†	6 Sol. - 1/0 Str.	1-Groove Tin Plated 1-Groove Bronze	Steel	1.13	1.31
JC-UL-AC	6 Sol. - 1/4, 5/16 Guy		Silicon Bronze		
JC-2-AA †	6 Sol. - 1/0 Str.	Tin Plated	Steel		
JC-UL	6 Sol. - 1/4, 5/16 Guy		Silicon Bronze		
JC-3-CC †	6 Sol. - 1/0 Str.	Bronze	Steel		
JC-UL-CC	6 Sol. - 1/4, 5/16 Guy		Silicon Bronze		

• RUS accepted


† Not UL listed



Bronze Universal Parallel Groove Clamp Connectors

Type UCR

- Manufactured from high strength bronze alloy
- Designed to clamp two copper conductors to flat surface or bus bar
- Furnished with silicon bronze hardware
- Accommodates a wide conductor range in both grooves
- Interlocking design ensures proper conductor alignment

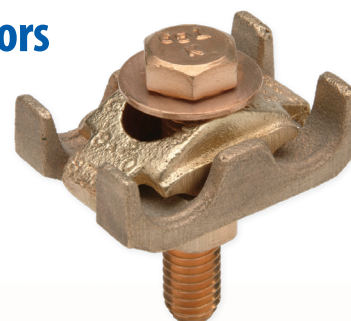

CATALOG NUMBER	CONDUCTOR RANGE (EITHER GROOVE)	APPROXIMATE DIMENSIONS (IN.)			BOLT SIZE
		L	W	H	
UCR-013	8 Sol. - 2/0 Str.	1.25	1.75	1.06	3/8
UCR-030	1/0 Sol. - 300 kcmil	1.75	2.31	1.38	1/2
UCR-050	250 - 500 kcmil	2.00	2.75	1.63	1/2
*UCR-075	300 - 750 kcmil	3.50	3.13	2.13	1/2

* Two bolts

