
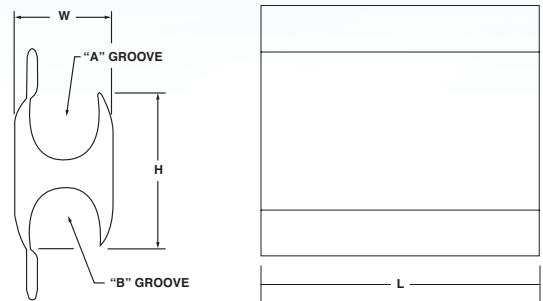


Aluminum Wide Range Double Tab Press-Ons

Type KR-R

- Manufactured from high conductivity aluminum
- Designed for overhead line tap applications with copper*, aluminum, ACSR, and compact conductors
- In copper to aluminum applications, H-shaped profile with solid barrier provides conductor separation, prevents strand cutting, and minimizes galvanic corrosion
- Deep indent crimp lines make crimp locations clearly visible
- Bendable tabs secure both run and tap conductors, enabling the user to easily operate installation tool
- Pre-filled with oxide inhibitor and individually boxed

*Note: Not recommended for copper to copper applications

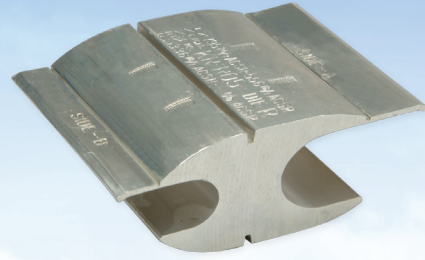

CATALOG NUMBER	GROOVE	STANDARD CONDUCTOR			COMPRESSED CONDUCTOR		NO. OF CRIMPS (HYD.)	DIE SIZE
		ACSR & ALUMINUM ALLOY	AL OR CU STRANDED	AL OR CU SOLID	ACSR	STRANDED		
KR-R03	A	300, 336, 397, 477, 556 18/1	336, 350, 397, 400, 450, 477, 500, 550, 556, 600	-	397, 477, 556, 636	477, 500, 556, 636	3	R
	B	1/0, 2/0, 3/0, 4/0, 266, 336 18/1	2/0, 3/0, 4/0, 250, 266, 300, 336, 350	3/0, 4/0	2/0, 3/0, 4/0, 266, 336, 397 18/1	3/0, 4/0, 250, 266, 300, 336, 350, 397		
KR-R04	A	300, 336, 397, 477, 556 18/1	336, 350, 397, 400, 450, 477, 500, 550, 556, 600	-	397, 477, 556, 636	477, 500, 556, 636	4	
	B	300, 336, 397, 477, 556 18/1	336, 350, 397, 400, 450, 477, 500, 550, 556, 600	-	397, 477, 556, 636	477, 500, 556, 636		
KR-R05	A	477 30/7, 556, 605, 636, 653, 666, 715, 795 26/7	600, 636, 700, 715, 750, 795, 800, 874, 900	-	795, 874, 954	795, 874, 954	3	
	B	1/0, 2/0, 3/0, 4/0, 266, 336 18/1	2/0, 3/0, 4/0, 250, 266, 300, 336, 350	3/0, 4/0	2/0, 3/0, 4/0, 266, 336, 397 18/1	3/0, 4/0, 250, 266, 300, 336, 350, 397		
KR-R06	A	477 30/7, 556, 605, 636, 653, 666, 715, 795 26/7	600, 636, 700, 715, 750, 795, 800, 874, 900	-	795, 874, 954	795, 874, 954	4	
	B	300, 336, 397, 477, 556 18/1	336, 350, 397, 400, 450, 477, 500, 550, 556	-	397, 477, 556, 636	477, 500, 556, 636		
KR-R07	A	477 30/7, 556, 605, 636, 653, 666, 715, 795 26/7	600, 636, 700, 715, 750, 795, 800, 874, 900	-	795, 874, 954	795, 874, 954	4	
	B	477 30/7, 556, 605, 636, 653, 666, 715, 795 26/7	600, 636, 700, 715, 750, 795, 800, 874, 900	-	795, 874, 954	795, 874, 954		

CATALOG NUMBER	APPROXIMATE DIMENSIONS (IN.)		
	L	W	H
KR-R03	3.50	1.75	3.02
KR-R04	4.63	1.75	3.06
KR-R05	3.50	1.75	3.02
KR-R06	4.63	1.75	3.05
KR-R07	4.63	1.75	3.03