
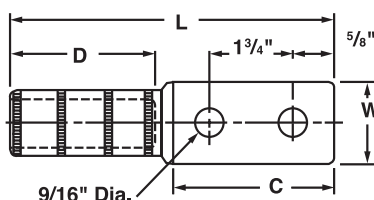


Aluminum Compression Terminals - Two Hole Tongue Side Formed Types FKLA, FSLA, and FULA

- Manufactured from high strength aluminum alloy
- For aluminum, copper, or ACSR conductors
- Connectors are pre-filled with oxide inhibitor
- Completely closed transitions protect the end of cable from environmental hazards
- Three common barrel O.D. sizes accommodate a range from #10 Str. - 500 kcmil
- Requires only three installation dies to crimp 15 conductor ranges
- For tin plating, suffix catalog number with "-TN"

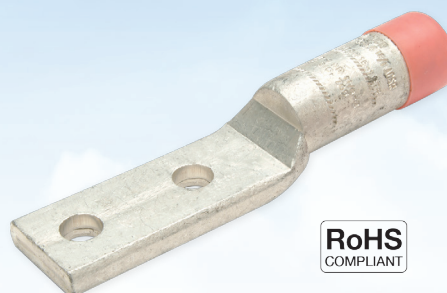

CATALOG NUMBER	CONDUCTOR RANGE	APPROXIMATE DIMENSIONS (IN.)					DIE SIZE	NO. OF CRIMPS
		C	D	L	TONGUE THICKNESS	W		
FKLA-W8-D	10 Str., 8 Sol.	3.38	1.50	5.44	.31	1.00	BG, 5/8, 243	3
FKLA-W6-D	8 Str., 6 Sol.							
FKLA-W4-D	6 Str., 4 Sol., 4 Compact, 6 ACSR							
FKLA-W2-D	4 & 3 Str., 2 Sol., 2 Compact, 4 ACSR							
FKLA-C2-D	2 Str., 1/0 Sol., 1 Compact, 2 ACSR							
FKLA-R2-D	1 Str., 2/0 Sol., 1/0 Compact, 1 ACSR							
FKLA-010-D	1/0 Str., 1/0 ACSR	3.38	1.88	5.94	.25	1.25	840, 249	3
FSLA-W2-D	4 & 3 Str., 2 Sol., 2 Compact, 4 ACSR							
FSLA-C2-D	2 Str., 1/0 Sol., 1 Compact, 2 ACSR							
FSLA-R2-D	1 Str., 2/0 Sol., 1/0 Compact, 1 ACSR							
FSLA-010-D	1/0 Str., 3/0 Sol., 2/0 Compact, 1/0 ACSR							
FSLA-013-D	2/0 Str., 4/0 Sol., 3/0 Compact, 2/0 ACSR							
FSLA-017-D	3/0 Str., 4/0 Compact, 3/0 ACSR	3.50	2.50	6.63	.38	1.50	1 1/8-2, 316, 705	3
FSLA-025-D	4/0 Str., 250 kcmil, 250 & 300 Compact, 4/0 ACSR							
FSLA-030-D	300 & 350 kcmil, 350 Compact, 266.8 18/1 ACSR							
FSLA-035-D	350 kcmil, 336.4 18/1 ACSR							
FULA-R2-D	1 Str., 2/0 Sol., 1/0 Compact, 1 ACSR							
FULA-010-D	1/0 Str., 3/0 Sol., 2/0 Compact, 1/0 ACSR							
FULA-013-D	2/0 Str., 4/0 Sol., 3/0 Compact, 2/0 ACSR							
FULA-017-D	3/0 Str., 4/0 Compact, 3/0 ACSR							
FULA-025-D	4/0 Str., 250 kcmil, 250 & 300 Compact, 4/0 ACSR							
FULA-030-D	300 kcmil, 350 Compact, 266.8 18/1 ACSR							
FULA-035-D	350 kcmil, 400 Compact, 336.4 18/1 ACSR							
FULA-R033-D	400 kcmil, 500 Compact, 336.4 26/7 ACSR							
FULA-045-D	450 kcmil, 397.5 18/1, 26/7 ACSR							
FULA-050-D	500 kcmil, 477 18/1 ACSR							