


Underground Direct Burial Service Connectors

Type DBA

- Manufactured from high strength cast aluminum alloy
- For aluminum or copper conductors
- Designed to be used as a multi-tap service junction suitable for use in enclosures and direct burial applications
- Contact pads allow new services to be added as needed without affecting previous installations
- Connector body is insulated with high strength dielectric plastisol
- Insulation will not support combustion and is chemical and abrasion resistant
- Water tight caps can be removed for the addition of the EPDM rubber force-fit insulating sleeves (Type DBTBF)

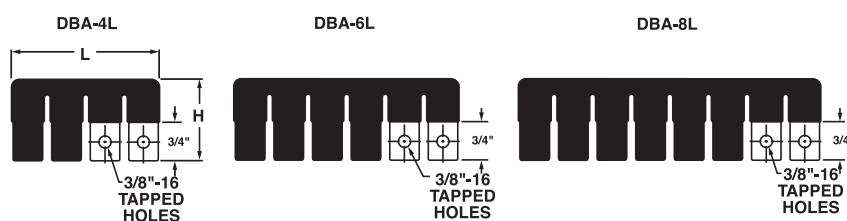

CATALOG NUMBER	APPROXIMATE DIMENSIONS (IN.)	
	L	H
DBA-4L	5.50	2.38
DBA-6L	8.50	2.38
DBA-8L	11.50	2.38

Ordering Information:

- For street lighting tap, suffix catalog number with "-S"
- For insulating sleeve for the street lighting tap, consult factory