


Aluminum Terminals

Types RAA and RAAC

For aluminum and ACSR cable to flat

- Manufactured from high strength cast aluminum alloy
- Clamping hardware is of high strength, anodized and lubricated 2024-T4 aluminum alloy
- Side formed contact surfaces are standard to allow clearance for flush mounting
- Oxide inhibitor recommended on contact surfaces
- Reversible cap allows for expanded conductor range
- Captive bolt head design permits single wrench installation
- Drilling in pads conforms to NEMA standards for 1/2" hardware
- Special drilling is available upon request
- If copper flashed pad is preferred on tongue, use "RAAC" prefix
- For tin plating, suffix catalog number with "-TN"
- For tongue mounting hardware, suffix catalog number with "-TMH"

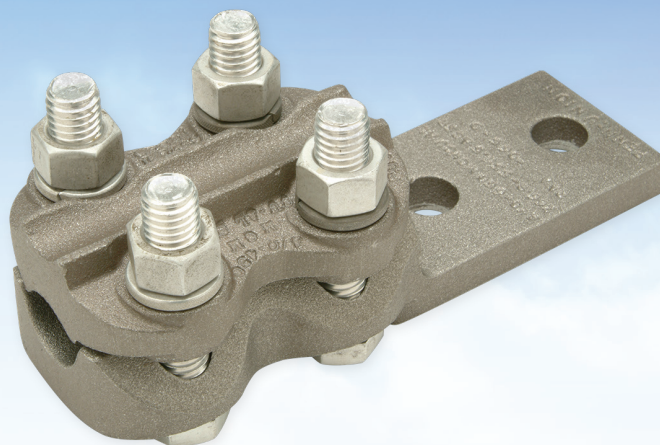

RoHS
COMPLIANT

CATALOG NUMBER	A CONDUCTOR RANGE		APPROXIMATE DIMENSIONS (IN.)					BOLT SIZE
	ALUMINUM	ACSR	G	L	M	T	W	
RAA-013-S*	6 Str. - 2/0 Str.	6 - 2/0	.75	3.88	2.00	.38	2.06	1/2
RAA-013-D*			.75	5.25	2.00	.38	2.06	1/2
RAA-025-S	6 Str. - 250 kcmil	6 - 4/0	.88	4.63	2.75	.38	2.13	1/2
RAA-025-D			.88	6.00	2.75	.38	2.13	1/2
RAA-025-F			.88	6.00	2.75	.38	2.13	1/2
RAA-040-D	3/0 Str. - 400 kcmil	3/0 - 336.4	.94	6.25	3.00	.38	2.25	1/2
RAA-040-F			.94	6.25	3.00	.38	2.25	1/2
RAA-065-D	250 - 650 kcmil	266.8 - 556.5	1.00	6.75	3.50	.44	2.63	1/2
RAA-065-F			1.00	6.75	3.50	.44	2.63	1/2
RAA-065-E			1.00	7.75	3.50	.38	2.63	1/2
RAA-090-D	500 - 900 kcmil	477 - 795	1.06	7.00	3.75	.44	2.75	1/2
RAA-090-F			1.06	7.00	3.75	.44	2.75	1/2
RAA-090-E			1.06	8.00	3.75	.38	2.75	1/2
RAA-125-D	600 - 1250 kcmil	556.5 - 1113	1.19	7.50	4.25	.44	3.38	5/8
RAA-125-F			1.19	7.50	4.25	.44	3.38	5/8
RAA-125-E			1.19	8.50	4.25	.44	3.38	5/8
RAA-160-D	900 - 1600 kcmil	795 - 1431	1.25	7.75	4.50	.44	3.50	5/8
RAA-160-F			1.25	7.75	4.50	.44	3.50	5/8
RAA-160-E			1.25	8.75	4.50	.44	3.50	5/8
RAA-200-D	1250 - 2000 kcmil	1113 - 1780	1.44	8.25	5.00	.50	4.00	3/4
RAA-200-F			1.44	8.25	5.00	.50	4.00	3/4
RAA-200-E			1.44	9.25	5.00	.50	4.00	3/4
RAA-300-D	2000 - 3000 kcmil	1780 - 2870	2.13	8.50	5.25	1.38	4.50	3/4
RAA-300-F			2.13	8.50	5.25	1.00	4.50	3/4
RAA-300-E			2.13	9.50	5.25	.75	4.50	3/4

*Denotes 2 bolt clamping

