
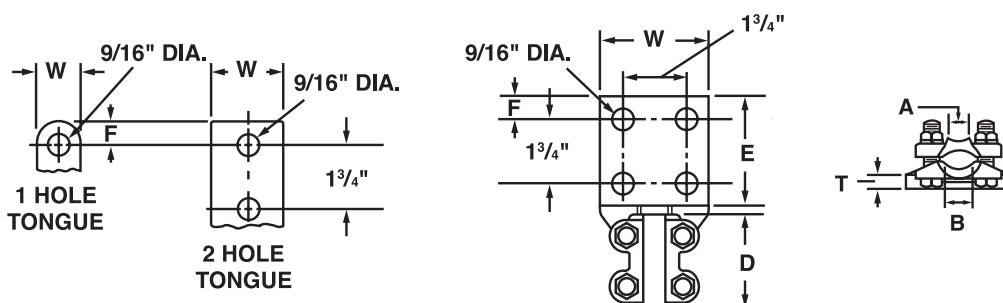


Bronze Terminals

Type RAR

For copper cable to flat

- Manufactured from high strength cast copper alloy
- Furnished with silicon bronze bolts, nuts, and lockwashers for corrosion resistance
- Reversible cap allows for expanded conductor range
- Side formed contact surfaces are standard and allow clearance for flush mounting
- Drilling in pads conforms to NEMA standards for 1/2" hardware
- For tin plating, suffix catalog number with "-TN"

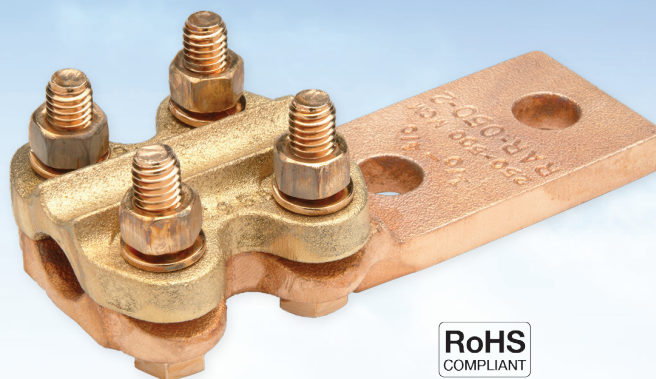

CATALOG NUMBER	A COPPER CONDUCTOR RANGE	B COPPER CONDUCTOR RANGE	NO. OF HOLES IN TONGUE	APPROXIMATE DIMENSIONS (IN.)					BOLT SIZE
				D	E	F	T	W	
RAR-021-S	8 Sol. - 1 Str.	1/0 Str. - 4/0 Str.	1	2.25	1.75	.75	.31	1.50	3/8
RAR-021-D	6 Str. - 1 Str.	1/0 Str. - 4/0 Str.	2	2.25	3.00	.63	.25	1.50	3/8
RAR-025-D	6 Sol. - 1 Str.	1/0 Str. - 250 kcmil	2	2.50	3.00	.63	.25	1.50	3/8
RAR-025-DH			2	2.50	3.00	.63	.25	1.50	1/2
RAR-025-F	4 Sol. - 1/0 Str.	2/0 Str. - 250 kcmil	4	2.50	3.00	.63	.25	3.00	3/8
RAR-025-FH			4	2.50	3.00	.63	.25	3.00	1/2
RAR-050-D	1/0 Str. - 4/0 Str.	250 - 500 kcmil	2	2.50	3.00	.63	.38	1.75	3/8
RAR-050-DH			2	2.50	3.00	.63	.38	1.75	1/2
RAR-050-F			4	2.50	3.00	.63	.38	3.00	3/8
RAR-050-FH			4	2.50	3.00	.63	.38	3.00	1/2
RAR-080-D	2 Sol. - 4/0 Str.	250 - 800 kcmil	2	2.50	3.00	.63	.41	2.00	1/2
RAR-080-F			4	2.50	3.00	.63	.41	3.00	1/2
RAR-100-D	4/0 Str. - 550 kcmil	600 - 1000 kcmil	2	3.00	3.00	.63	.44	2.00	1/2
RAR-100-F			4	3.00	3.00	.63	.38	3.00	1/2
RAR-200-D	500 - 1000 kcmil	1100 - 2000 kcmil	2	5.25	3.00	.63	.56	1.50	1/2
RAR-200-F			4	5.25	3.00	.63	.50	3.00	1/2