


Heavy Duty Long Barrel - Two Hole Tongue with Closed Transition

Type HBBLU-D

- Manufactured from heavy wall, high conductivity seamless copper tubing
- **Heavy wall tubing provides additional heat dissipation during heavy duty loads**
- Beveled entry for easy cable insertion
- Closed transition protects end of cable from environmental conditions
- Two hole mounting pad assures maximum secureness
- Long barrel provides high pull out force and added secureness for improved mechanical and electrical properties
- For tin plating suffix catalog number with "TN"



RoHS
COMPLIANT

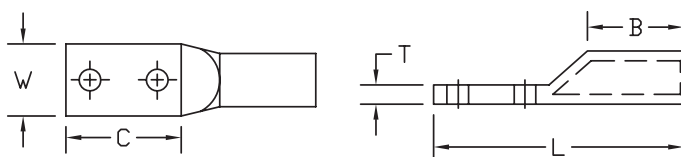

HBBLU-D DIMENSIONS & INDEX REFERENCE

CATALOG NUMBER	COPPER CONDUCTOR SIZE	STUD HOLE SIZE	FIGURE DIMENSIONS (IN.)						BURNDY DIE INDEX NO.	WIRE STRIP LENGTH
			STUD HOLE SPACING	TONGUE WIDTH "W"	TONGUE LENGTH "C"	TONGUE THICKNESS "T"	BARREL LENGTH "B"	OVERALL LENGTH "L"		
HBBLU-1/0D	1/0 AWG	1/2"	1.75	.84	3.13	.22	1.63	5.38	165, 287	1-3/4"
HBBLU-2/0D	2/0 AWG	1/2"	1.75	.97	3.13	.25	1.75	5.25	166, 206	1-7/8"
HBBLU-3/0D	3/0 AWG	1/2"	1.75	1.06	3.19	.28	1.63	5.31	167, 207, 211, 256	1-3/4"
HBBLU-4/0D	4/0 AWG	1/2"	1.75	1.22	3.13	.31	1.63	5.25	168, 208	1-3/4"
HBBLU-025D	250 kcmil	1/2"	1.75	1.28	3.13	.34	2.00	5.56	169	2-1/8"
HBBLU-030D	300 kcmil	1/2"	1.75	1.41	3.25	.41	1.75	5.69	170	1-7/8"
HBBLU-035D	350 kcmil	1/2"	1.75	1.59	3.13	.42	2.88	6.50	267	3"
HBBLU-040D	400 kcmil	1/2"	1.75	1.75	3.00	.47	2.75	6.75	209	2-7/8"
HBBLU-050D	500 kcmil	1/2"	1.75	1.88	3.00	.50	2.50	6.50	210	2-5/8"
HBBLU-060D	600 kcmil	1/2"	1.75	2.03	3.00	.63	2.38	6.38	576	2-1/2"
HBBLU-075D	750 kcmil	1/2"	1.75	2.27	3.25	.64	3.00	7.25	627	3-1/8"
HBBLU-100D	1000 kcmil	1/2"	1.75	2.75	3.00	.75	3.25	7.50	345	3-3/8"