



BRONZE GROUND CLAMP CONNECTORS • TYPE GO

For clamping braid, cable or strip copper to pipe





Made from high copper content alloy. Furnished with silicon bronze bolt, nuts and lockwashers.

Catalog Number	IPS	Approximate Dimensions										Bolt Dia.†
		A		B		C		D		E		
		in	mm	in	mm	in	mm	in	mm	in	mm	
GO-0	3/4	2 1/2	64	2 1/2	64	1 1/8	28	1 1/2	38	1	25	3/8
GO-1	1	2 3/4	70	3 1/4	82	1 1/4	32	1 3/4	44	1	25	3/8
GO-2	1 1/4	3	76	3 1/2	89	1 3/8	34	2 1/16	53	1	25	3/8
GO-3	1 1/2	3 3/8	85	3 1/2	89	1 1/2	38	2 3/8	60	1	25	3/8
GO-4	1 1/2	3 3/8	85	3 1/2	89	1 1/2	38	2 3/8	60	1 1/2	38	3/8
GO-4A	1 1/2	3 3/8	85	3 1/2	89	1 1/2	38	2 3/8	60	2	51	1 1/2
GO-5	2	3 3/4	95	4 1/4	108	1 1/2	38	2 13/16	71	1	25	3/8
GO-6	2	3 3/4	95	4 1/4	108	1 1/2	38	2 13/16	71	1 1/2	38	3/8
GO-7	2	4	102	4 3/8	111	1 3/4	44	2 15/16	75	2	51	1 1/2
GO-7A	2 1/2	4 1/2	115	5	127	1 3/4	44	3 7/16	87	1 1/2	38	1 1/2
GO-8	2 1/2	4 1/2	115	5	127	1 7/8	47	3 7/16	87	2	51	1 1/2
GO-9	2 1/2	4 1/2	115	5	127	2	51	3 7/16	87	2 1/2	84	1 1/2
GO-10	3	5 1/4	133	6 1/4	158	2	51	4 1/16	104	2	51	1 1/2
GO-11	3	5 1/4	133	6 1/4	158	2	51	4 1/16	104	2 1/2	64	1 1/2
GO-12	3	5 1/4	133	6 1/4	158	2	51	4 1/16	104	3	76	1 1/2
GO-13	3 1/2	5 3/4	146	5 7/8	149	2 1/4	57	4 9/16	116	2	51	1 1/2
GO-14	3 1/2	5 3/4	146	5 7/8	149	2 1/4	57	4 9/16	116	2 1/2	64	1 1/2
GO-15	3 1/2	5 3/4	146	5 7/8	149	2 1/4	57	4 9/16	116	3	76	1 1/2
GO-16	4	6 1/4	158	6 1/2	165	2 1/4	57	5 1/16	129	2	51	1 1/2
GO-17	4	6 1/4	158	6 1/2	165	2 3/8	60	5 1/16	129	2 1/2	64	1 1/2
GO-18	4	6 1/4	158	6 1/2	165	2 1/2	64	5 1/16	129	3	76	1 1/2
GO-19	4	6 1/4	158	6 1/2	165	2 3/4	70	5 1/16	129	3 1/2	89	1 1/2

†3/8" U-Bolt threaded as shown above, add suffix "FT" for full thread. 1/2" U-Bolt standard is full thread.

TRAILER GROUND CLAMPS • TYPE GBC AND GBCH

Grounds Trailer Frames, Cable Trays, Pedestals - Connects #6-#14 solid copper conductor to metal frames where continuity of grounding can be assured. Ground wire may be installed on clamp prior to mounting the clamp on metal frame, reducing installation time. High strength copper alloy (91% nominal) provides conductivity, durability and excellent corrosion resistant characteristics. High strength steel zinc plated anchoring bolt penetrates paint or metal oxide. Hex head bolt installs with can wrench, socket or crescent wrench. Square head bolt allows clamp to be installed with pliers when tighter ground connection is needed.

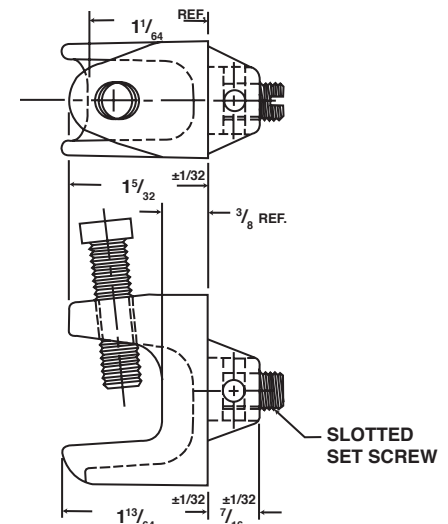

Catalog Number	Wire Range	Beam Bolt	L	W	H
GBC-6	#6-#14	Sq HD 5/16-18	1 5/8	1"	1 3/16
GBCH-6		Hex HD 5/16-18			