


ALUMINUM MULTIPLE TAP CONNECTOR • TYPE NA

For any combination of copper or aluminum

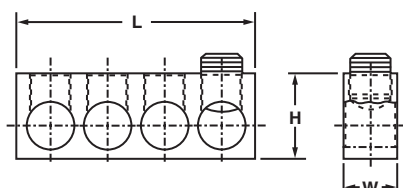


Connectors are made from high strength aluminum alloy, tin plated for bimetalic applications. Fills the need for a UL Recognized 486B, AL7CU and CSA Certified connector for more than one tap conductor not met by split bolts.

Black Plastisol (105° C rated) cover is available for connectors. Covers type NC are listed below as a convenience. The covers are not UL nor CSA.

Catalog Number	Conductor Range		Number of Conductors	Approximate Dimensions						Cover Catalog Number
				H		W		L		
	AWG	MM ²		in	mm	in	mm	in	mm	
NA250-4T	10-250 MCM	4-120	4	1.13	28.70	.88	22.35	3.63	92.20	NC4-250
NA250-6T	10-250 MCM	4-120	6	1.13	28.70	.88	22.35	5.38	136.65	NC6-250
NA250-8T	10-250 MCM	4-120	8	1.13	28.70	.88	22.35	7.13	181.10	NC8-250
NA350-4T	10-350 MCM	4-185	4	1.38	35.05	1.00	25.40	3.79	96.27	NC4-350
NA350-6T	10-350 MCM	4-185	6	1.38	35.05	1.00	25.40	5.61	142.49	NC6-350
NA350-8T	10-350 MCM	4-185	8	1.38	35.05	1.00	25.40	7.43	188.72	NC8-350
NA500-4T	10-500 MCM	4-240	4	1.63	41.40	1.00	25.40	4.84	122.94	NC4-500
NA500-6T	10-500 MCM	4-240	6	1.63	41.40	1.00	25.40	7.22	183.39	NC6-500
NA500-8T	10-500 MCM	4-240	8	1.63	41.40	1.00	25.40	9.59	243.57	NC8-500

ALUMINUM STREET LIGHT CONNECTOR WITH COVER • TYPE SLK

For any combination of copper or aluminum



Connectors are made from high strength aluminum alloy, tin plated for bimetalic applications. The connector is UL Listed 486B, AL9CU and CSA Certified.

Black Plastisol (105°C Rated) cover is provided with the connector. The cover is not UL Listed nor CSA.

Catalog Number	Conductor Range		Number of Conductors	Approximate Dimensions					
				H		W		L	
	AWG	MM ²		in	mm	in	mm	in	mm
SLK-2/0	14-2/0	1.5-50	3	.742	18.85	.565	14.35	1.690	42.93